  
**Moulded Case  
Circuit Breakers**



Solutions for diverse application.

Stability: Activated




In every industry, big or small, electrical power supply is critical. Even a few seconds of interruption or instability can result in huge financial losses, even loss of life. We have little or no control over the nature or stability of power supply. The unpredictable nature of power makes it important to take appropriate steps for the protection and safety of your organisation's employees and equipment.

In line with this objective, Larsen & Toubro presents dsine – a highly advanced and sophisticated range of Moulded Case Circuit Breakers (MCCBs).

The dsine range, a new generation of MCCBs, is a combination of state-of-the-art design and modern user-friendly features. It also boasts a wide choice of protective releases, ergonomics, aesthetics and compactness. The range, designed to meet the changing needs of users after extensive analysis and user feedback, can satisfy the most demanding system requirements.

Complemented by a wide array of accessories, the dsine range offers comprehensive solutions to customer applications ensuring operational safety, reliability and versatility.



**dsine**  
Moulded Case  
Circuit Breakers



## L&T – Turning technology to your advantage

Over the last five decades, L&T has earned a place among the world's leading manufacturers of Low Voltage Switchgear with the scale, sophistication and range to meet global benchmarks.

In keeping with our leadership position in the Indian market, we also provide expert assistance in product

selection, installation and effective after-sales service, across the country.

L&T is one of the first companies to introduce MCCBs in India. Over the years, we have developed our products to meet the ever-evolving demands of the market.

Obstacles: Deleted



1101010101001

## Original Equipment Manufacturers (OEMs)


For Original Equipment Manufacturers (OEMs), every moment poses a new challenge. The dsine range of MCCBs has been created keeping this in mind. Built in accordance with the highest technical standards, dsine MCCBs assure reliable and maintenance-free operation. They have been designed to adapt to changes and overcome the challenges of your day-to-day operations.

Besides being available in 4P version to serve OEMs, such as DG sets, dsine MCCBs come with an external neutral CT for the microprocessor-based version to

offer neutral and earth fault protection with 3P MCCBs. Equipped with common accessories for the entire range, these MCCBs assure excellent savings by reducing your inventory costs.

What's more, our experienced sales & service team is just a call away. Our team is adept at handling queries and complaints and is trained to offer you techno-commercial solutions... on time, every time.

After all, forging long-term associations has always been the cornerstone of our business.



# Versatility: Downloaded



Paper Industry




Sugar Industry



Oil Industry



Gas Industry

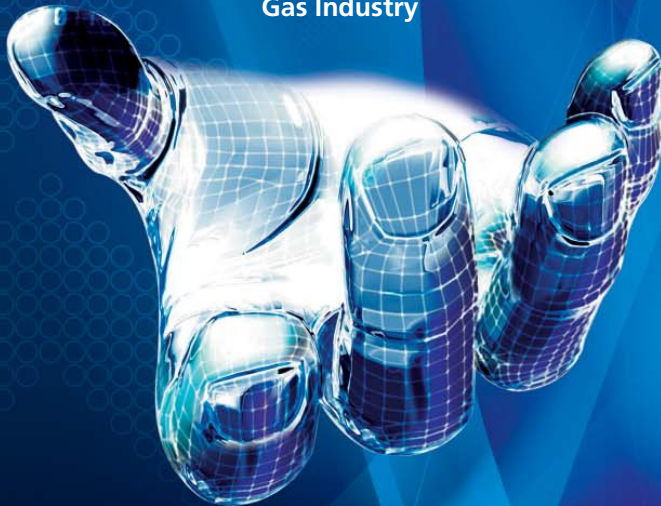

## Industries


Every industry is unique, and so are its requirements. Industries as diverse as paper, sugar, oil & gas have different sets of needs. Thankfully, dsine MCCBs, available in various current ranges (20A to 1250A), are designed to efficiently handle such diversity.

Our Thermal Magnetic as well as Microprocessor-based releases with various breaking capacities cater to multiple industrial needs. Built with the latest technology, dsine MCCBs deliver optimum efficiency even in the most adverse environmental conditions.

MCCBs with high breaking capacities cater to high voltage applications such as windmills and mines. They are compact so the panel builder can optimise panel size. They are thoroughly factory-tested with adequate quality controls in place. Moreover, since these MCCBs are designed to handle high-value capacitive inrush currents, no nuisance tripping is observed in APFC panels. Motor loads being most vital, our design team has also developed special dsine-M series for motor back-up protection ranging from 32A to 630A.



Efficiency: Initiated

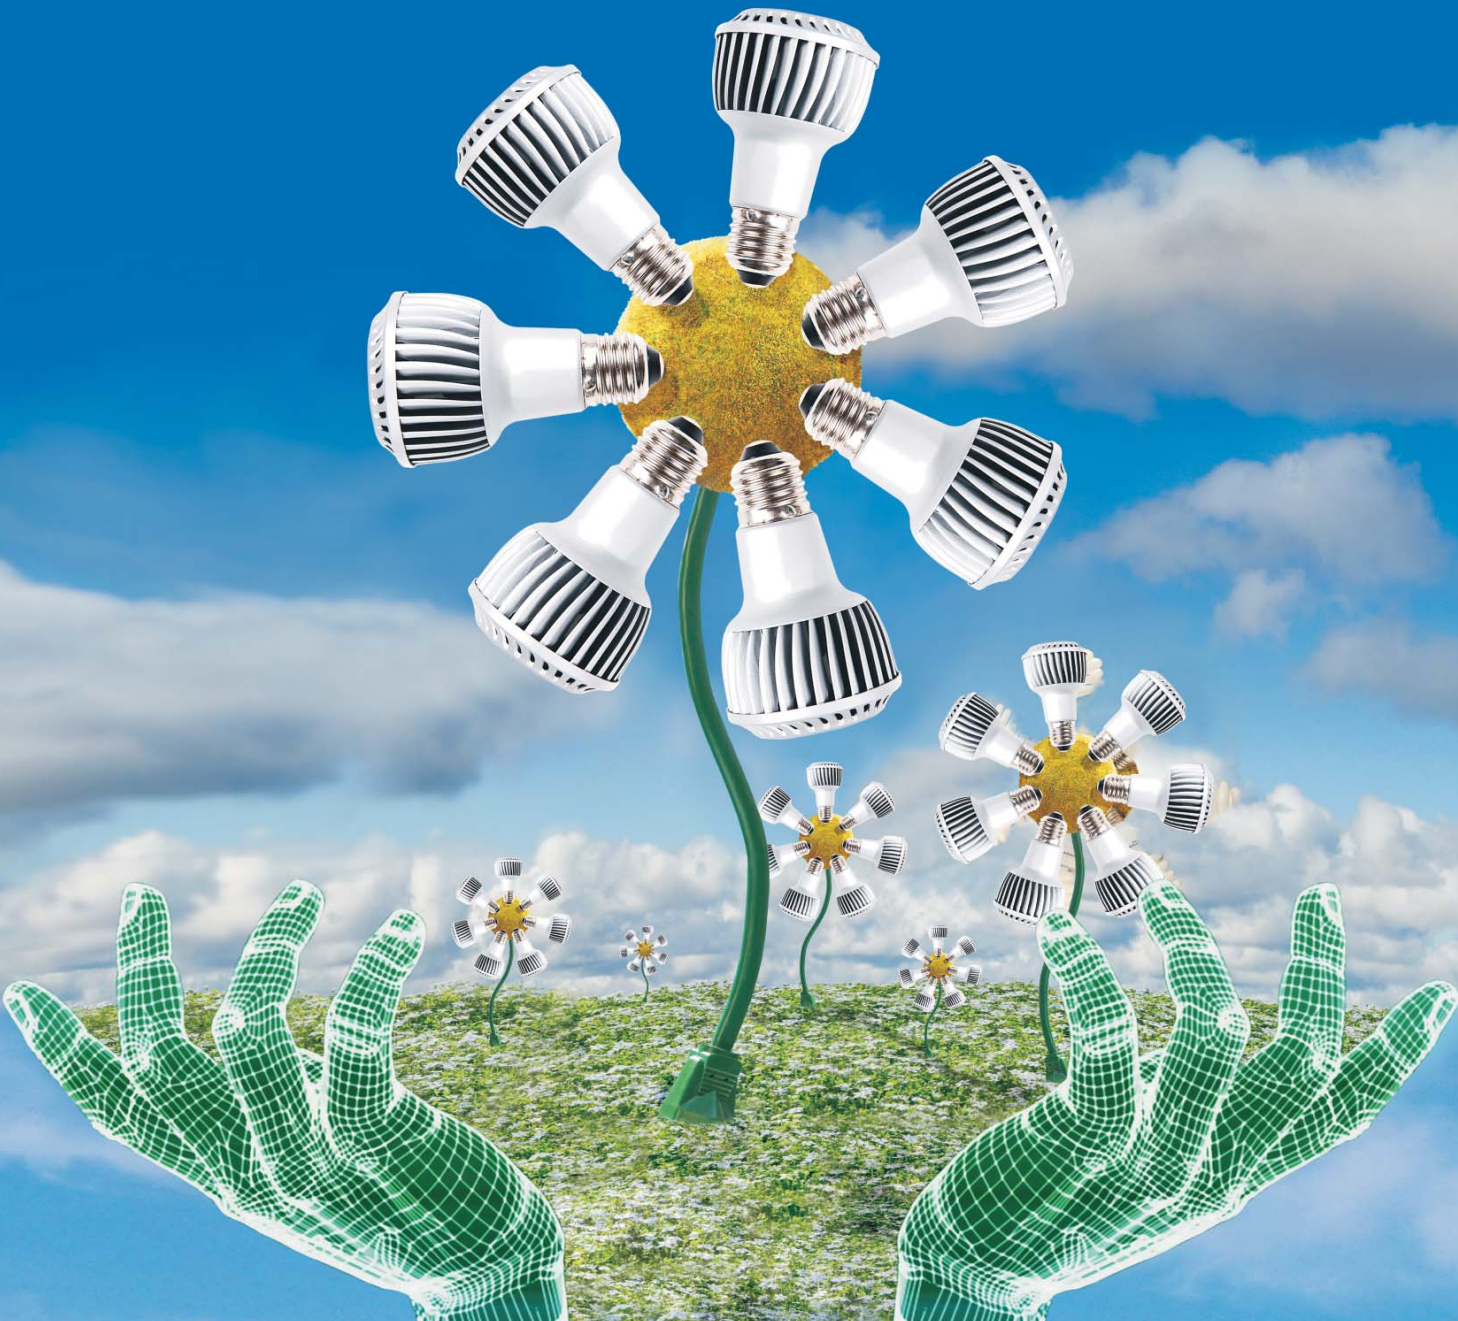



## Building Sector

Today, efficient energy management holds the key to growth and development in any sector. Moreover, in most sectors, such as the building sector, energy management has become mandatory. Our new range of dsine MATRIX releases with advanced technology is specially designed with energy management in mind.

MTX3.0 releases with power metering and communication capabilities are ideal for remote annunciation in Data Centres and IT Parks.

Choose from a variety of communication protocols including MODBUS RTU and Bluetooth available with our new MATRIX releases. In today's world of high-end residential buildings or commercial malls, our motorised dsine MCCBs with the fastest changeover from mains to DG in less than 300 milliseconds are indeed the most reliable choice. Our Auto Source Transfer System has almost eliminated the risk of loss of data.



Performance: Delivered



## DC Systems, UPS, Battery Chargers

Unlike AC breaking, DC breaking is a critical phenomenon that causes severe damage. That's why, we offer DC MCCBs from the dsine family. A range that has been designed and developed specially for DC applications such as UPS and battery chargers.


Choose from a wide range of DC voltages (up to 500V) and DC breaking capacities (up to 36kA) available as per various application requirements.

They are also available for lower DC voltages such as battery chargers.

The SD (Switch Disconnect) version of dsine MCCBs can be used at the incoming and outgoing terminals of UPS for isolation. Our SD is designed to withstand high currents without compromising on Service Performance.



Reliability: Ensured

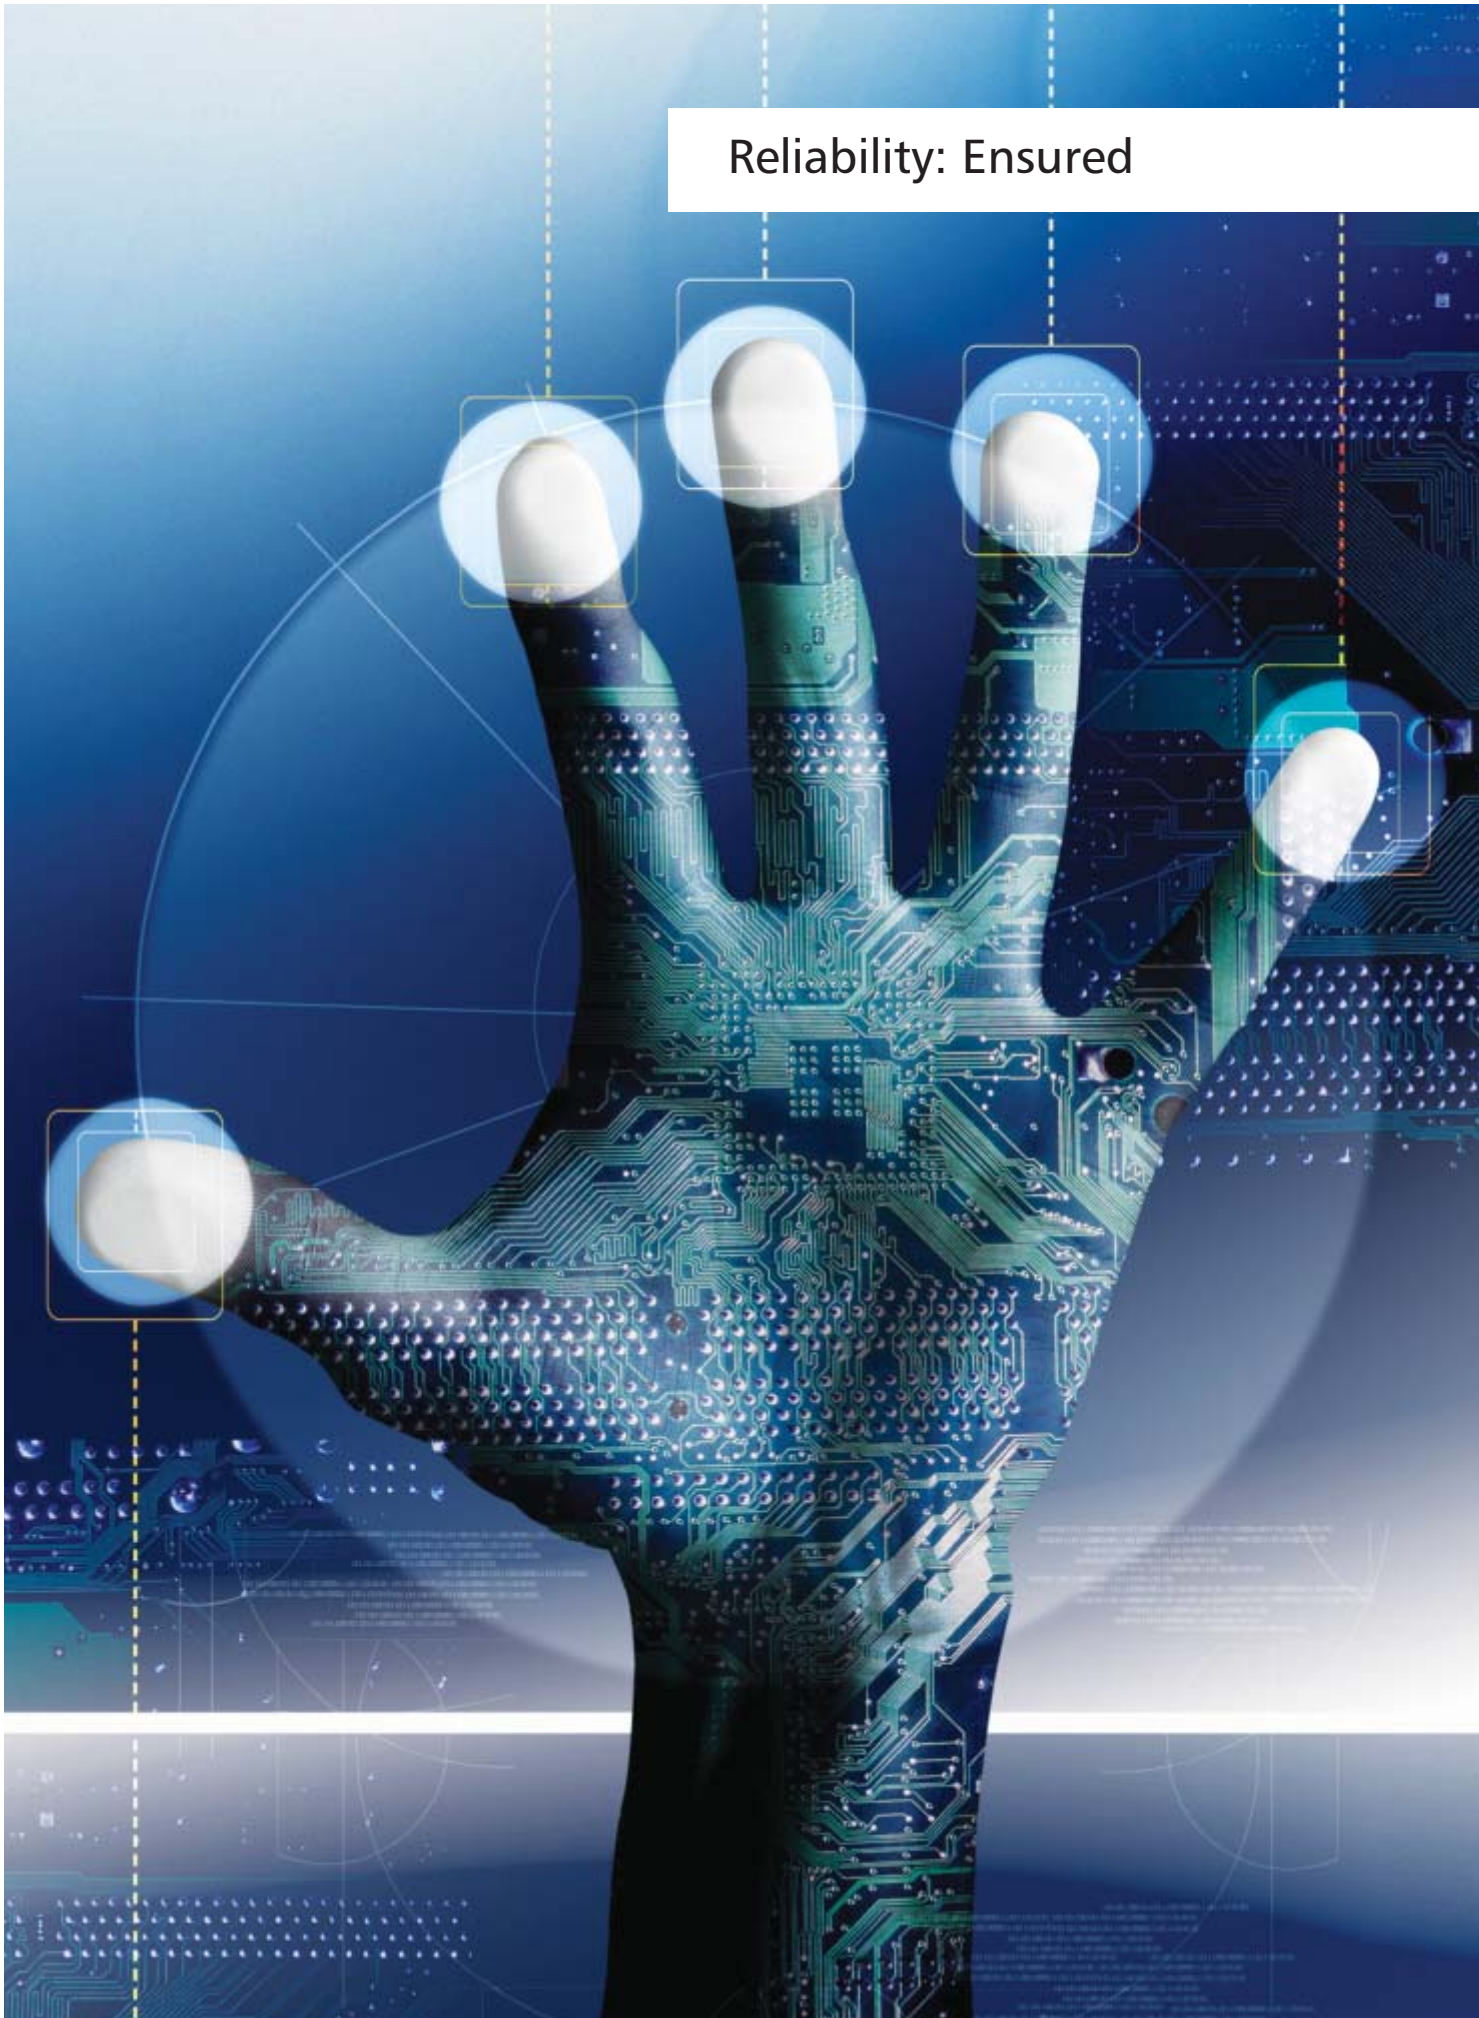

## Infrastructure

Monitoring and controlling electrical installations at places like airports, hospitals etc. demands high-end, reliable solutions. MATRIX releases are built precisely for such purposes.

Communication capable MATRIX releases with power and energy metering help in modernisation. These releases are made compatible with HMI (Human Machine Interface) and DCS (Data Control System).

As power supply is critical for airports and hospitals, our dsine MCCBs with ASTS offer changeovers in less than 300 milliseconds coupled with a variety of other protections in case of under voltage, phase unbalance, etc.

A variety of settings in MATRIX releases helps in choosing the correct selection for fault clearing, while trip & event recording with MATRIX releases helps in analysing the faults in detail.

Our dsine MCCBs are shipped to Europe, Africa, Australia, Middle East, South East Asia, China and America. In India, we have the largest stockist network with over 700 stockists. To find the ideal dsine MCCB suitable for your requirements, turn the page.



DN0



DN1




DN2



DN3



DN4

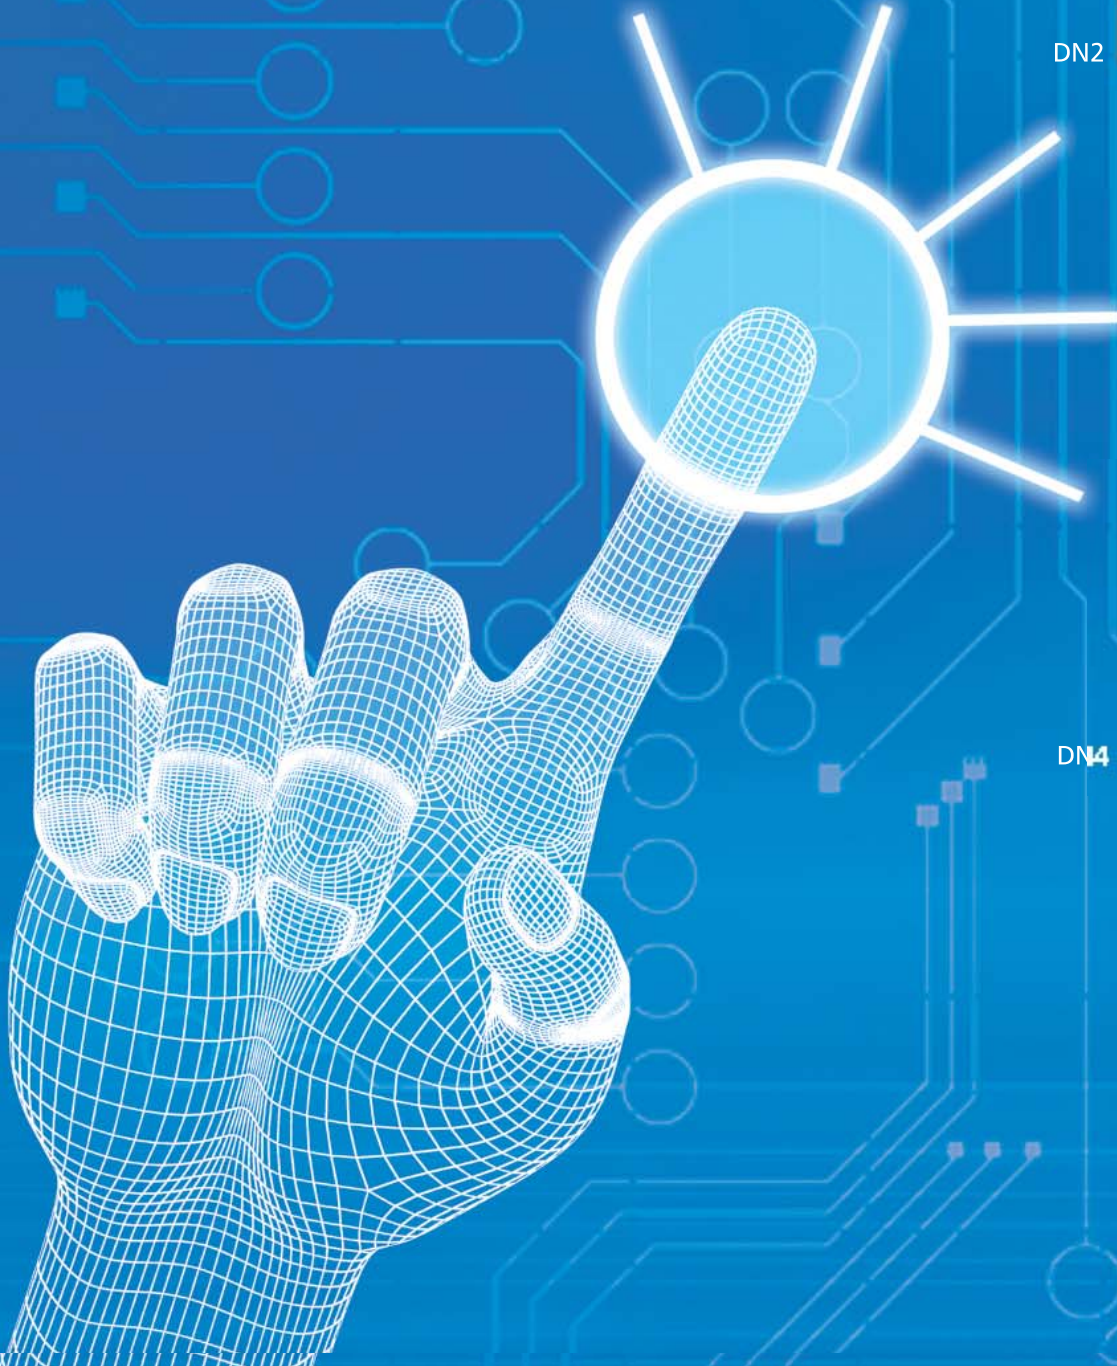

# INDEX

15

Overview

25

Product Data

45

Accessories

53

Characteristic Curves

59

Wiring Diagrams

65

Dimensions





# Overview

---

■ <b>d sine</b> Range	16
■ Standards & Approvals	18
■ Structure & Features	19
■ Marking & Configuration	20
■ Trip Units	21
■ Accessories	22



State-of-the-art design, user-friendly features and a wide spectrum of protection releases form the hallmarks of the dsine range. Also recognised for its ergonomics, aesthetics and compactness, it belongs to a new generation of MCCBs. Specially designed and developed for extreme tropical conditions, it promises reliable performance at high ambient and humid environment.

dsine, unfailingly, caters to the ever-evolving needs of customers, derived after in-depth analysis and customer feedback. Because we understand our customers' requirements and demands, our contemporary range of MCCBs never fall short of ensuring complete customer satisfaction. Moreover, complemented by a host of accessories, the dsine range delivers comprehensive solutions to customer applications ensuring operational safety, reliability and versatility.


### Features

- Range available from 20A to 1250A
- Available in 3 pole & 4 pole
- Range of 25kA / 36kA / 50kA / 70kA / 100kA breaking capacities
- Microprocessor and Thermal-Magnetic based protection releases
- MCCBs for Motor backup protection
- MCCBs for Distribution and SD versions
- Suitable for DC application
- Manual, Rotary or Motorised versions
- Wide range of common Internal and External accessories

DN0	
Rated Current	20, 25, 32, 40, 50, 63, 80, 100, 125*A
Release	Thermal-Magnetic
DN1	
Rated Current	125, 160, 200, 250A
Release	Thermal-Magnetic
DN2	
Rated Current	63, 80, 100, 125, 160, 200, 250A
Release	Thermal-Magnetic
	40, 63, 100, 160, 250A
	Microprocessor
DN3B	
Rated Current	320, 400A
Release	Thermal-Magnetic
DN3	
Rated Current	320, 400, 500, 630A
Release	Thermal-Magnetic
	400, 630A
	Microprocessor
DN4	
Rated Current	800, 1000, 1250A
Release	Microprocessor

\* Available only in DN0-D

### Breaking Capacities (I<sub>cu</sub>)

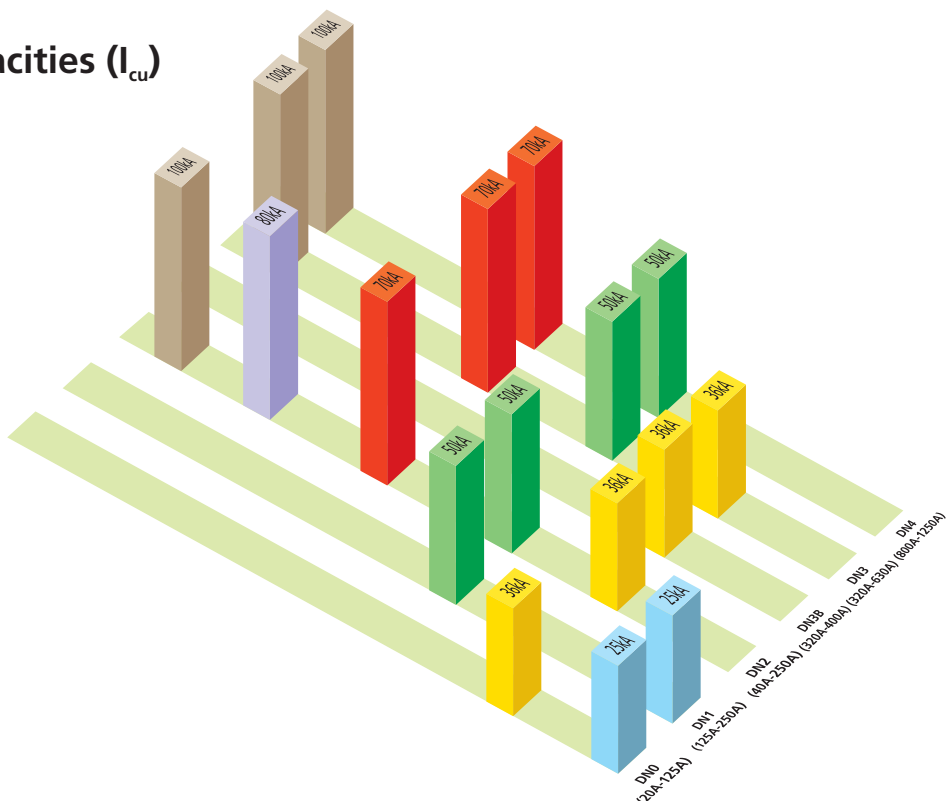

## dsine range of MCCBs and Accessories comply with following international standards



- **IEC 60947-1, EN 60947-1, IS/IEC 60947-1**  
Low-voltage switchgear and controlgear, Part 1: General Rules
  - **IEC 60947-2, EN 60947-2, IS/IEC 60947-2**  
Low-voltage switchgear and controlgear, Part 2: Circuit-breakers
  - **IEC 60947-3, EN 60947-3, IS/IEC 60947-3**  
Low-voltage switchgear and controlgear, Part 3: Switches, disconnectors, switch-disconnectors and fuse combination units
  - **IEC 60947-4, EN 60947-4, IS/IEC 60947-4**  
Low-voltage switchgear and controlgear, Part 4: Contactors and Motor-starters
- Third party certificates (ERDA/CPRI) available for dsine range of MCCBs

### NABL



NABL accreditation is a formal recognition of the technical competence of testing, calibration or medical laboratory for a specific task following ISO/IEC 17025:2005 Standard. Accredited laboratories have the responsibility of satisfying the criteria of laboratory accreditation at all times, which are verified during Surveillance and Re-assessment visits by NABL. Further the accredited laboratories should prove their technical competence by satisfactory participation in recognized Proficiency Testing Programmes.

L&T's Switchgear Testing Lab is NABL accredited subject to continued satisfactory compliance to above standard & additional requirements of NABL.

All dsine range of MCCBs are tested in L&T's NABL accredited Switchgear Testing Lab.

### CE marking



A CE marking is a European marking of conformity that indicates a product complies with the essential requirements of the applicable European laws or directives with respect to safety, health and environment and consumer protection. Generally, this conformity to the applicable directives is done through self-declaration and is required on products in the countries of the European Economic Area (EEA) to facilitate trade among the member countries. The manufacturer or their authorized representative established in the EEA is responsible for affixing the CE marking to their product. The CE marking provides a means for a manufacturer to demonstrate that a product complies with a common set of laws required by all countries in the EEA to allow free movement of trade within the EEA countries.

L&T's dsine range of MCCBs conform to the Low voltage directive 73/23/EEC as amended by directive 93/68/EEC, provided if it is used in the application for which it is made and is installed and maintained in accordance with professional practices with relevant installation standards and operating instructions.

### IECEE CB SCHEME – DEKRA (KEMA) certified




The IECEE CB SCHEME is a multilateral agreement among participating countries and certification organizations. A manufacturer utilizing a CB test certificate issued by one of the accepted National Certification Bodies (NCBs) can obtain certification marks of the latter, within their scope of adherence, in the countries where the accepted NCBs are located.

L&T's dsine range of MCCBs are certified for IECEE CB scheme by DEKRA (KEMA) which is a world renowned organisation with a heritage of 150 years in testing, inspections & certification, risk management and verification.

## Low Watt Loss

- The entire current carrying path is optimally designed to achieve low watt loss
- Silver contacts offer low contact resistance thus helping in low watt loss

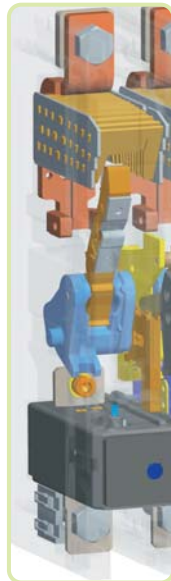

## Arc Chutes

- Arc chutes are designed for efficient and faster arc quenching



## MCCB Mechanism

- Quick make, quick break & trip free mechanism



## Current Limiting MCCBs

- The unique speed contact system with current limiting feature accelerates the opening of contacts during short circuit resulting in very low let through energy



## Positive Isolation

- Indicates the true position of the contacts - ensures operator safety

## Knob


- Designed for better grip
- Indicates "ON", "OFF" and "TRIP" position of MCCB

## No Load Line Bias

- Either side of MCCB terminals can be used as load or line

## Release

- Thermal & Microprocessor based releases are available

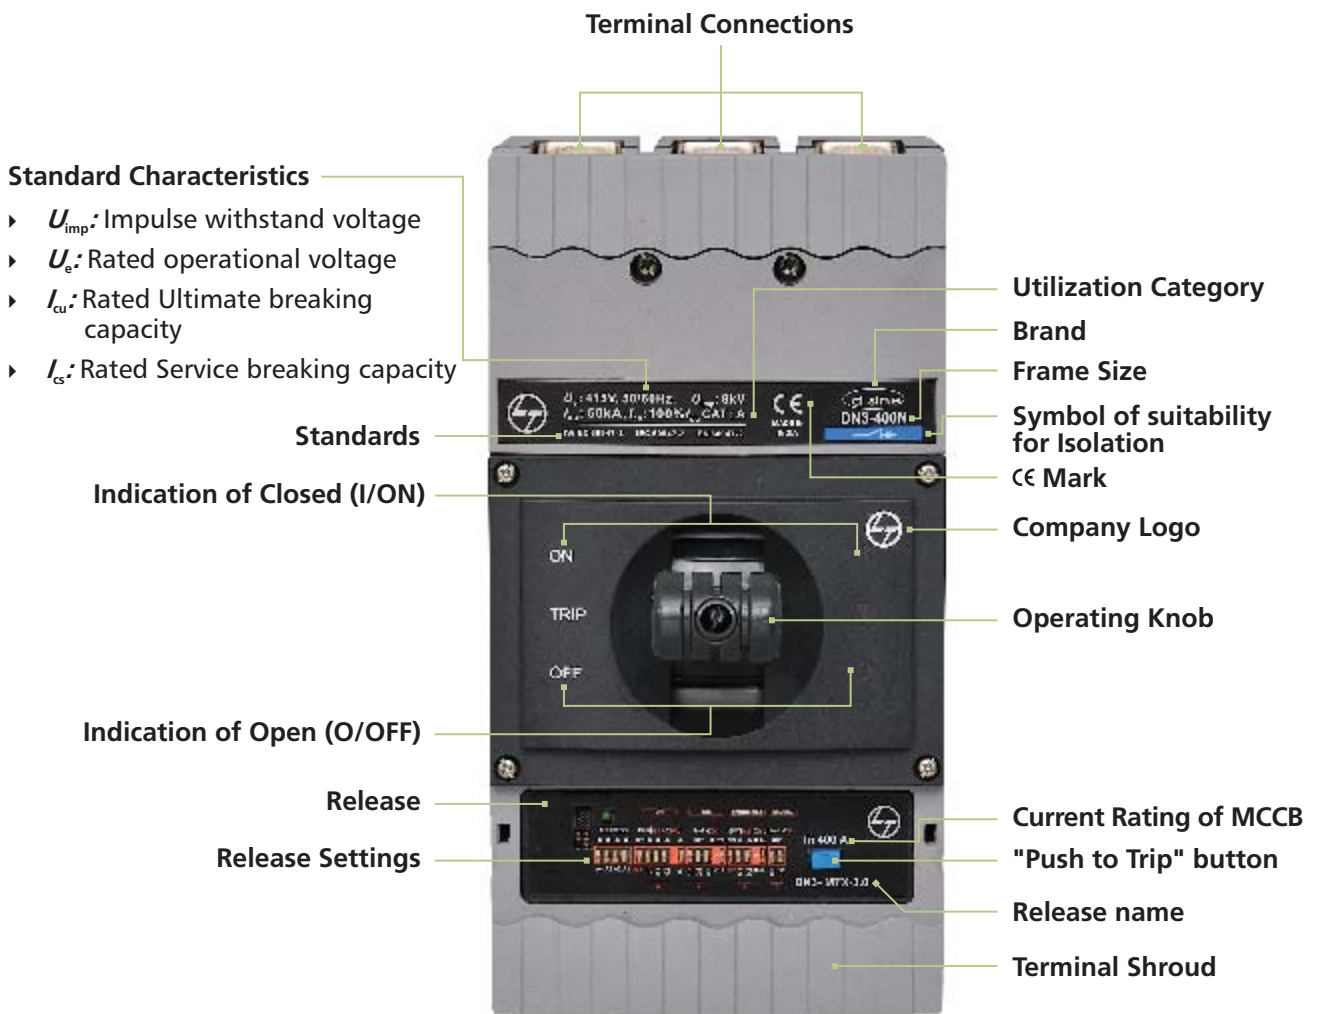

Thermal Magnetic Releases

Variable Thermal, Fixed Magnetic (DN0, DN1, DN3B)



Variable Thermal, Variable Magnetic (DN2, DN3)



MTX1.0 with LSI (DN2, DN3, DN4)



MTX2.0 with LSING + Current Metering (DN2, DN3, DN4)



Microprocessor Releases

MTX3.0 with LSING + Communication capable + Power Metering (DN2, DN3, DN4)



Motor Protection Release (DN0, DN1, DN2, DN3 - Magnetic Protection only)

Magnetic Release








Switch Disconnecter (DN0, DN2, DN3, DN4)


Isolator



- 1 Spreader Terminals
- 2 Phase Barriers
- 3 Undervoltage Release
- 4 Shunt Release
- 5 Auxiliary Contact
- 6 Trip Alarm Contact
- 7 Auxiliary + Trip Alarm Contact
- 8 Direct Rotary Handle
- 9 Extended Rotary Handle
- 10 Panel Mounted Keylock
- 11 Stored Energy Electrically Operated Mechanism
- 12 Mechanical Interlock Kit
- 13 Communication Module
- 14 Voltage Module
- 15 Display Module
- 16 External Neutral CT (with Adaptor Kit)

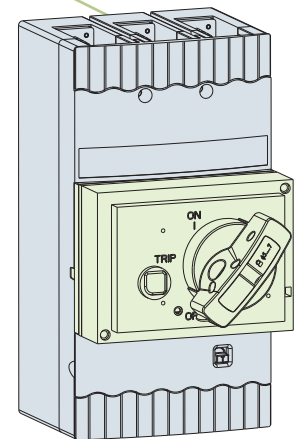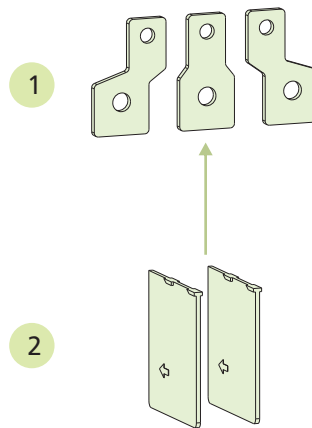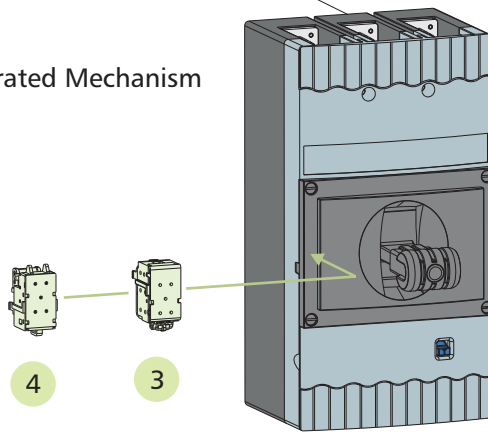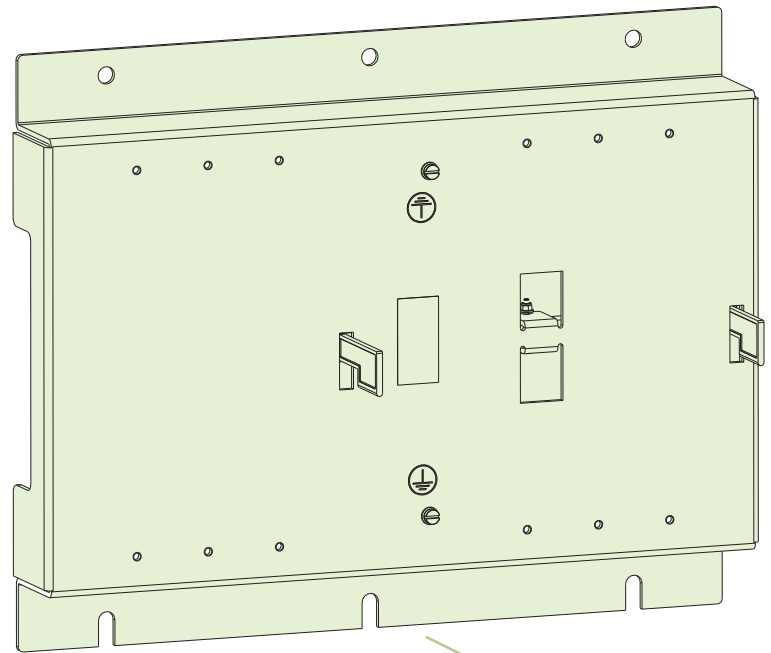



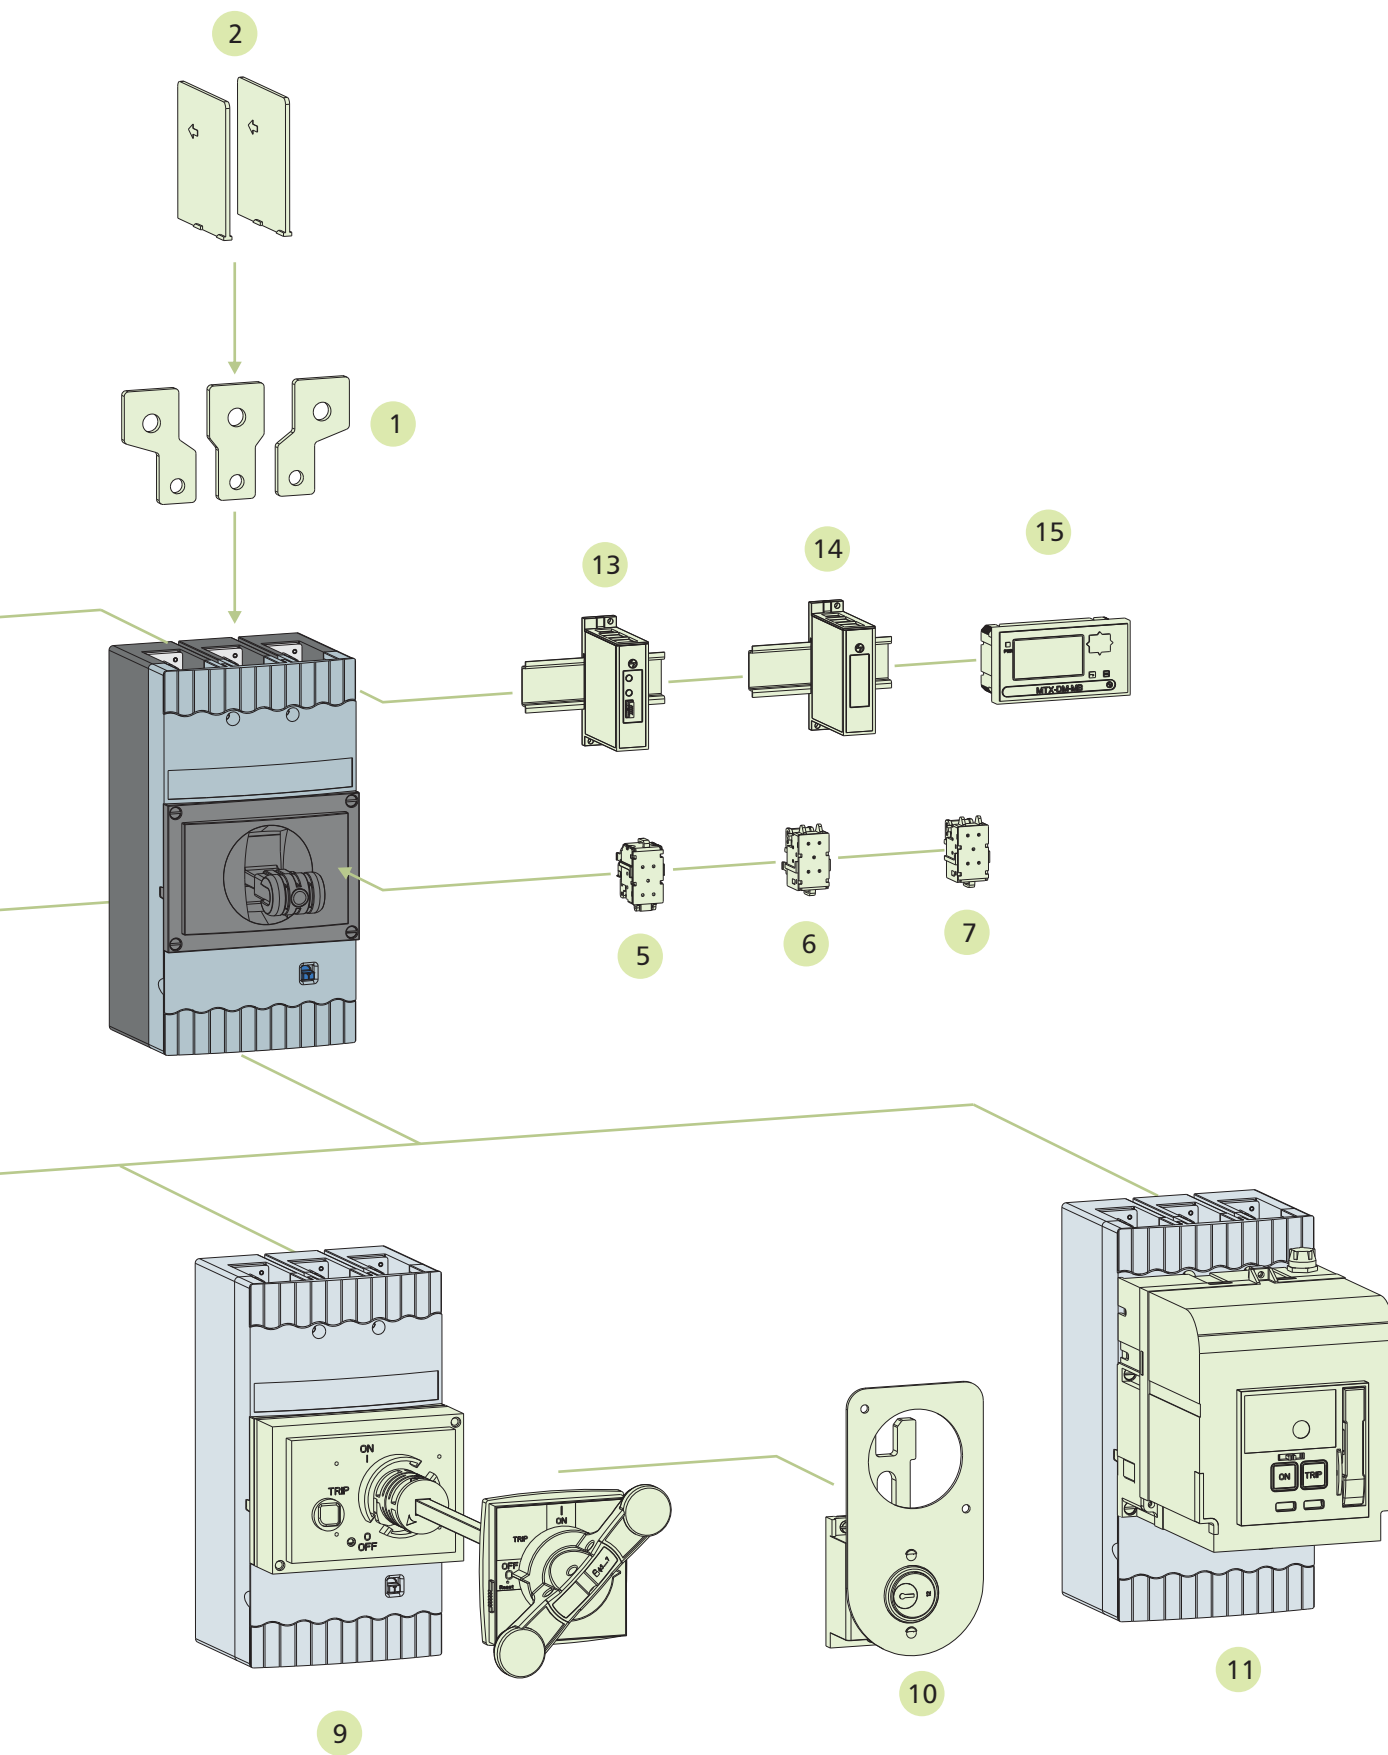



## Product Data

---

- **MCCBs for Power Distribution**

26

- ▶ Technical Datasheet
- ▶ Motor Backup Protection
- ▶ Isolator Application
- ▶ MCCBs for DC Applications
- ▶ Protection Releases

- **MCCBs for Different Applications**

42

- ▶ Auto Source Transfer Application

Technical Datasheet

Frame		100A	125A	250A	250A						400A	400A			630A				1250A							
Type		DN0-100		DN0-125	DN1-250			DN2-250						DN3B-400			DN3-400			DN3-630				DN4-1250		
		C	D	D	C	N	D	N	S	H	V	D	D	N	S	D	N	S	D	N	S	V	N	S	V	
Release		TM		TM	TM			TM/MP (MTX1.0/2.0/3.0)			MP (MTX 1.0/2.0/3.0)	TM	TM/MP (MTX1.0/2.0/3.0)			TM/MP (MTX1.0/2.0/3.0)				MP (MTX 1.0/2.0/3.0)	MP (MTX1.0/2.0/3.0)					
Current Range $I_n$ (A)		20, 25, 32, 40, 50, 63, 80, 100		125	125, 160, 200, 250			40, 63, 80, 100, 125, 160, 200, 250			40, 63, 100, 160, 250	320, 400			320, 400			500, 630				400, 630	800, 1000, 1250			
Poles		3/4		3/4	3/4			3/4				3/4			3/4			3/4				3/4				
Impulse withstand Voltage $U_{imp}$ (kV)		6		6	6			8				8			8			8				8				
Rated Operational Voltage $U_r$ (V) (MAX)		600		600	600			690				690			690			690				690				
Rated Insulation Voltage $U_i$ (V)		690		690	690			800				800			800			800				800				
Utilization Category		A		A	A			A				A			A			A				A				
Standard		IS/IEC60947-2, IEC60947-2 & EN60947-2																								
Rated Short Circuit Breaking Capacity	$I_{cu}$ (kA)	240 VAC	40	65	65	65	65	50	70	100	-	-	50	50	70	100	50	70	100	-	-	70	100	-		
		415 VAC	25	36	36	25	50	36	50	70	80	100	36	36	50	70	36	50	70	100	100	50	70	100		
		480 VAC	10	10	10	10	10	25	36	42	65	65	25	25	36	42	25	36	42	65	65	25	36	65		
		550 VAC	8	8	8	8	8	18	25	36	-	-	15	15	20	25	15	20	25	-	-	20	25	-		
		600 VAC	5	5	5	5	5	16	18	22	-	-	12	12	18	22	12	18	22	-	-	16	20	-		
	$I_{cs}$ as % $I_{cu}$	240 VAC	100%	50%	50%	50%	50%	100%	100%	100%	-	-	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
		415 VAC	100%	50%	50%	100%	50%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
		480 VAC	100%	50%	50%	50%	50%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
		550 VAC	100%	50%	50%	50%	50%	100%	100%	100%	-	-	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
		600 VAC	100%	50%	50%	50%	50%	100%	100%	100%	-	-	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	
Life	Mechanical	40000		40000	10000			25000			25000	10000			15000			15000				15000	20000			
	Electrical @1.0 $I_n$	4000		2500	3000			10000			10000*	4000			4000			4000				4000*	3000*			
Making Capacity (kA)		52.5	75.6	75.6	52.5	105	75.6	105	154	176	220	75.6	75.6	105	154	75.6	105	154	75.6	105	154	220	105	154	220	
Operating Frequency (Hz)		50 / 60																								
Total Opening Time		< 10msec																				< 20msec				
Finger-proof Terminals		Yes																								
Suitable for Isolation		Yes																								
IP class		IP40																								
Pollution Degree		III																								
Load Line Bias		NO																								
Ambient Temperature		-5°C to 55°C																								
Storage Temperature		-35°C to 70°C																								
Mounting Positions in Vertical Plane		Vertical and 90 deg in both directions																								
Dimensions (WxDxH) mm	3-Pole	75 x 60 x 130			105 x 60 X 165			105 x 96 x 179			140 x 111 x 205			140 x 111.5 x 266			140 x 111.5 x 266				210 x 143 x 370					
	4-Pole	100 x 60 x 130			140 x 60 X 165			140 x 96 x 179			184 x 111 x 205			183.5 x 111.5 x 266			183.5 x 111.5 x 266				278 x 143 x 370					
Weight (kg) (3/4 Pole)		0.8/1.1	0.73/1	0.73/1	1.55/2			2.5/3.3			4.0/5.0			5.5/7.2			6/7.8				6.3/8	17 / 22				
ACCESSORIES	INTERNAL	Auxiliary Contact	1 C/O or 2 C/O																							
		Trip Alarm Contact	1 C/O																							
		Auxiliary & Trip Alarm Contact	1 C/O + 1 C/O																							
		Shunt Release	240/415 V AC 50 Hz																							
		Under Voltage Release	110 / 415 V AC 50 Hz, 110 / 220 V DC, 24 V DC \$																							
	EXTERNAL	Rotary Operating Mechanism (Direct/Extended)	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
		Electrical Operating Mechanism	x		x		x		x		x		x		x		x		x		x		x		x	
		Mechanical Interlock Kit	x		x		x		x		x		x		x		x		x		x		x		x	
		Spreader Terminals	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
		Key lock	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
Neutral CT with Adaptor kit	x		x		x		x		x		x		x		x		x		x		x		x			
Current Metering Module	x		x		x		x		x		x		x		x		x		x		x		x			
Display, Communication and Voltage Module	x		x		x		x		x		x		x		x		x		x		x		x			

\$ : 'NO' of control contactor to be connected in series for 220V DC, 24V DC  
 @: Contains display module & metering module, separate cable required for connection  
 #: Only Extended ROM available  
 \*: at 415V  
 DN2 - 1500 @ 690V  
 DN3 - 1000 @ 690V  
 DN4 - 800A - 2500 @ 415V

**Note:**  
 • Any two internal accessories can be mounted at a time  
 • V version MCCBs, to be used with extended ROM only  
 • Separate earth fault module required for earth fault protection using TM releases  
 •  $I_{cu}$ : Rated ultimate short-circuit breaking capacity  
 •  $I_{cs}$ : Rated service short-circuit breaking capacity  
 • Reference temperature 40°C & 50°C

## Motor Backup Protection

AC induction motors are the vital elements in any production process and hence constitute majority of loads in Industry and other installations. The M version MCCBs in dsine range are developed specially to give short circuit protection for all types of motors. Selection of MCCB using our type 2 charts give reliable performance of the motors.



Frame		100A	160A	250A		400A	630A		
Type		DN0-100	DN1-160	DN2-250		DN3-400	DN3-630		
		M	M	M	MH	M	M	MV	
Current range (A)		32-100	100-160	100-250	32-250	320-400	500-630	320-630	
Poles		3	3	3	3	3	3	3	
Rated Short Circuit Breaking Capacity	$I_{cu}$ (kA)	400 / 415 V	50	50	50	80	50	50	100
		480 V	-	-	36	65	36	36	65
		690 V	-	-	15	-	15	10	50
	$I_q$ (kA)	415 V	50	50	50	80	50	50	100
		480 V	-	-	-	65	-	-	65
		690 V	-	-	-	-	-	-	-
	$I_{cs}$ as % $I_{cu}$	400 / 415 V	25%	25%	100%	100%	100%	100%	100%
		480 V	-	-	100%	100%	100%	100%	100%
		690 V	-	-	100%	-	100%	100%	50%
Magnetic Setting		9/n	10/n	6-10/n*					

**Note:** MV version MCCBs to be used with extended ROM only.

## Isolator Application

dsine MCCBs with Switch Disconnecter version offer solution for switching various loads such as UPS, Battery Banks etc. with various advantages. These MCCBs differ from regular MCCBs only in terms of absence of protection trip units. These MCCBs can be used for following applications for isolation purpose:

- For local isolation- such as very close to Motor load
- Generally used at the incoming of any sub-distribution
- As an Isolator for Bus coupler
- As an automatic switch
- For switching applications of motors with VFDs, soft starters

SD MCCBs are always backed up by the Short Circuit Protection Device (SCPD) to protect downstream loads/installations against short circuit. Our dsine SD MCCBs offer following advantages.

- Suitable for Positive isolation
- Available with 3P & 4P versions
- Can be used with Under Voltage Protection
- Remote tripping through Shunt release
- Motor operated MCCBs
- Status feedback possible



Following are the specifications of SD MCCBs

Frame	160A	250A	400A	400A	630A	800A	1000A	1250A
Type	DN0-160SD	DN2-250SD	DN3B-400SD	DN3-400SD	DN3-630SD	DN4-1250SD		
Current Range (A)	32-160	100-250	320-400	320-400	500-630	800	1000	1250
Poles	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
$I_{cw}$ (kA)	2	3.6	5.5	5.5	7.6	10	12	15
Duration (sec)	1	1	1	1	1	1	0.5	0.1

**Note:**  $I_{cw}$  - Rated short-time withstand current

\* To be set at 10In only

DC power distribution is an upcoming technology in this modern era due to its most rigorous network power applications such as







- AC-DC Power System
- DC-DC Converter Systems
- DC-AC Inverter Systems
- DC UPS
- Batteries & Accessories
- Solution to alternative energy-Solar Power

We offer dsine MCCBs for the protection of DC systems in variety of current ratings from 20A-630A, voltage ratings upto 750V and various breaking capacities ranging from 5kA to 36kA.

Frame	DN0-125*		DN1-250		DN2-250			DN3-400			DN3B-400	DN3-630			
Type	C	D	C	N	D	N	S	D	N	S	D	D	N	S	
Release	TM														
Poles	3 or 4														
Rated current In (A)	20, 25, 32, 40, 50, 63, 80, 100, 125		125, 160, 200, 250		63, 80, 100, 125, 160, 200, 250			320, 400			320, 400		500, 630		
I <sub>cu</sub> (kA rms)	250 V DC	20	20	20	30	36	20	30	36	25	20	30	36		
	500 V DC	15	15	15	20	25	15	20	25	10	15	20	25		
	750 V DC	-	-	10	15	20	10	15	20	-	10	15	20		
Type of connection	3P in series														
L/R (msec)	<15msec														

\*Available only in DN0-125D

Switching of DC currents is much severe phenomenon than switching AC currents due to non occurrence of natural zero. Hence DC MCCBs are desired to give less breaking capacity than AC MCCBs for the same voltage & currents. As per the earthing of the system, we recommend following connections for breaking the fault currents.

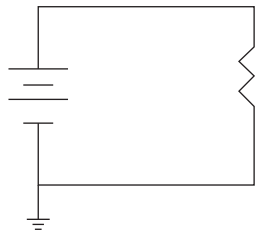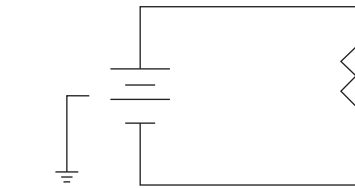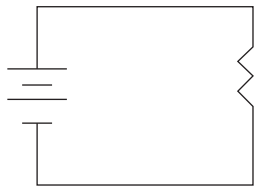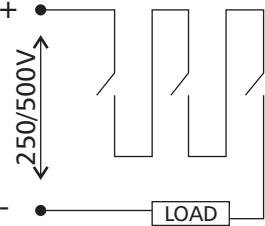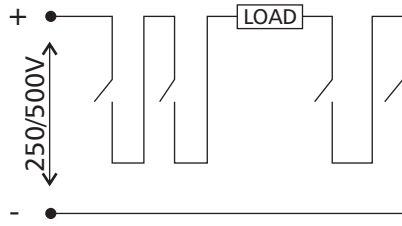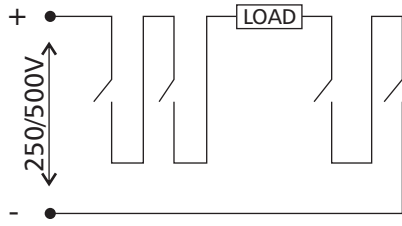Earthed system Any one polarity is earthed	Earthed system Midpoint of the system is earthed	Insulated system No earthing
		
No. of poles required to perform the break must be in series on one polarity	No. of poles required to perform the break must be on both the polarities	No. of poles required to perform the break can be shared between two polarities
		

**Note:** Suitable for Thermal Magnetic release only

## Thermal-Magnetic Release

### Features of Thermal-Magnetic Release

- ➔ Adjustable overload settings
- ➔ Fixed / Adjustable short circuit settings
- ➔ True RMS sensing
- ➔ "Push to Trip" button



Protection	Settings		
	DN0 & DN1	DN2 & DN3	DN3B
Overload	80% - 100%/ <sub>n</sub>	80% - 100%/ <sub>n</sub>	80% - 100%/ <sub>n</sub>
Short Circuit	9/ <sub>n</sub> (fixed)	6 - 10/ <sub>n</sub>	9/ <sub>n</sub> (fixed)
Earth fault	External GF Module required*		

## Microprocessor Release

### Features of MTX1.0

- ➔ Overload Protection with inverse time delay
- ➔ Adjustable Trip class
- ➔ Short Circuit Protection with selectable time delay
- ➔ Provision of Thermal memory defeat
- ➔ Provision for release testing
- ➔ Overload indication
- ➔ Power ON LED
- ➔ Self powered
- ➔ True RMS sensing
- ➔ "Push to Trip" button



MTX1.0	
Rated Current, $I_n$	From 40 to 1250A
<b>Overload (Phase)</b>	
Current setting, $I_r$ ( $I_r = x I_n$ )	40% to 100%/ <sub>n</sub> in steps of 5%
Time delay, $t_r$ (Inverse)	10s at 6/ <sub>r</sub> , 3s at 6/ <sub>r</sub> , 10s at 7.2/ <sub>r</sub> , 3s at 7.2/ <sub>r</sub>
Protection mode	ON / OFF
Thermal memory	Enable / Disable
<b>Short Circuit</b>	
Current setting, $I_s$ ( $I_s = x I_r$ )	1.5, 2.5, 4.0, 5.5, 6.5, 8.0/ <sub>r</sub>
Time delay, $t_s$	Instantaneous / 100ms
Protection mode	ON / OFF

**Note:** • Factory Settings - O/L: 100%/<sub>n</sub>, Curves: 6/<sub>r</sub>@10s, Thermal Memory: Off, S/C: 5.5/<sub>r</sub> @ Instantaneous  
 • Release provides in-built instantaneous override protection fixed @ 10/<sub>r</sub>

\* Refer page 51

## Microprocessor Release

### Features of MTX2.0

- ➔ Overload Protection with inverse time delay
- ➔ Adjustable Trip class
- ➔ Short Circuit Protection with selectable time delay
- ➔ Inbuilt Earth fault and Neutral overload protection
- ➔ Provision of Thermal memory defeat
- ➔ Provision for release testing
- ➔ Overload indication
- ➔ Power ON LED
- ➔ Panel mounted O-LED display for current metering
- ➔ Self powered
- ➔ True RMS sensing
- ➔ "Push to Trip" button
- ➔ Latest trip record



MTX2.0	
Rated Current, $I_n$	From 40 to 1250A
<b>Overload (Phase)</b>	
Current setting, $I_r$ ( $I_r = x I_n$ )	40% to 100% $I_n$ in steps of 5%
Time delay, $t_r$ (Inverse)	10s at $6I_r$ , 3s at $6I_r$ , 10s at $7.2I_r$ , 3s at $7.2I_r$
Protection mode	ON / OFF
Thermal memory	Enable / Disable
<b>Overload (Neutral)</b>	
Current setting, $I_N$ ( $I_N = x I_r$ )	50%, 100% and 150% $I_r$
Time delay, $t_N$	200ms / Same as overload
Protection mode	ON / OFF
<b>Short Circuit</b>	
Current setting, $I_s$ ( $I_s = x I_r$ )	1.5, 2.5, 4.0, 5.5, 6.5, 8.0 $I_r$
Time delay, $t_s$	Instantaneous / 100ms
Protection mode	ON / OFF
<b>Earth Fault</b>	
Current setting, $I_g$ ( $I_g = x I_n$ )	20% to 50% $I_n$ in steps of 10%
Time delay, $t_g$	100ms / 200ms
Protection mode	ON / OFF


**Note:** • Factory Settings - O/L: 100% $I_n$ , Curves:  $6I_r$ @10s, S/C: 5.5 $I_r$ @ Instantaneous, Thermal Memory: Off, E/F: Off, Neutral: Off.  
 • Release provides in-built instantaneous override protection fixed @ 10 $I_n$



## Advanced features of MTX2.0

### ▶ Panel Mounted Display for Current Metering & Trip Record

System currents & latest trip record can be viewed with panel door closed.

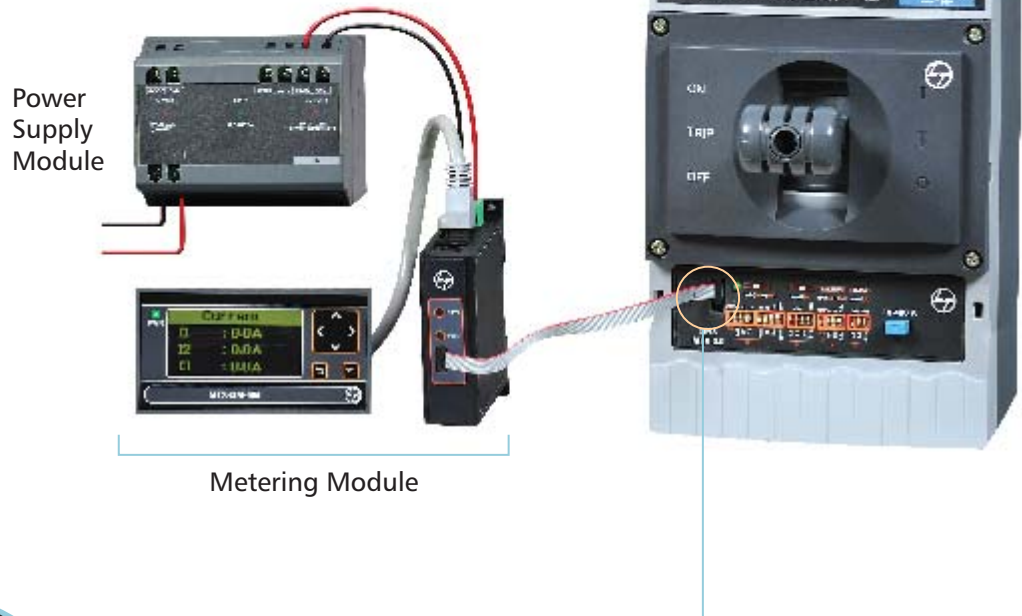

### ▶ Port with Polarized Connector

MTX2.0 release with metering port is implemented with poka-yoke technology using polarized connector to ensure correct insertion of metering harness, thus avoiding unnecessary errors.

### ▶ Digital Current Metering

MTX releases are designed with protection class CTs which measure true RMS values. Inbuilt current metering does not require separate CTs hence maintenance is easy.


### ▶ O-LED Display

O-LED display allows the operator a wide viewing angle.

O-LEDs showing current metering has got faster response time and also consumes less power, hence saves energy. It has better contrast ratio as well.



Display Module

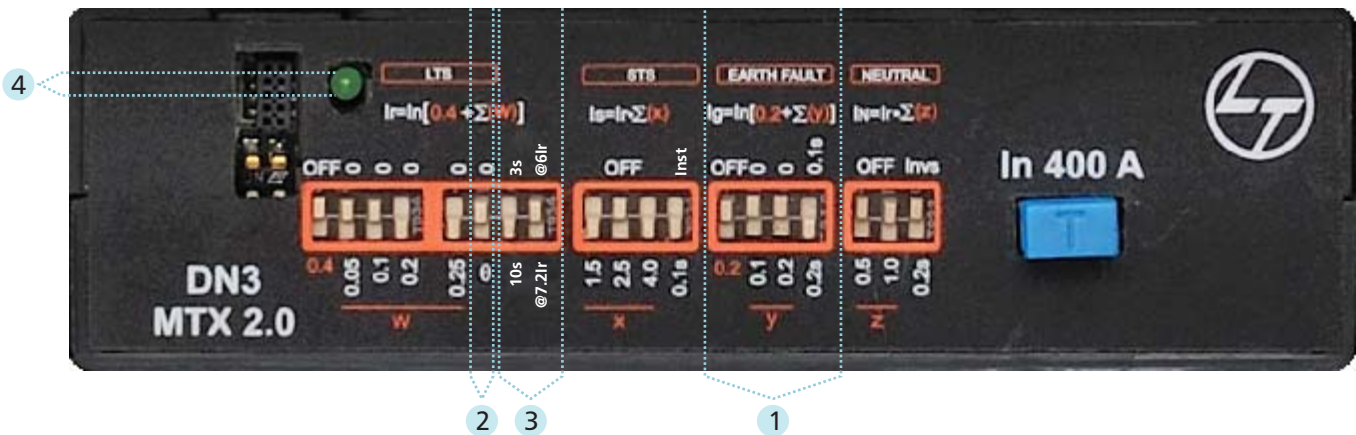

➔ **Inbuilt Earth Fault Protection** ————— 1

Inbuilt earth fault protection function does not require any separate trip coil & external CBCT, thus saving panel space, cost & improving the overall hygiene. Earth fault protection limits expenses by preventing damage to other equipment.

➔ **Thermal Memory** ————— 2

Thermal memory protects the system from thermal stresses generated by cumulative heating caused by cyclic overload conditions thus allowing the system to return to a safe operating temperature. This function also allows an optimization of cables or bus bar protection in case of low amplitude repetitive faults. Advance tripping increases the overall life and eliminates the production downtime incase of severe faults.

➔ **Multiple Trip Class** ————— 3

Enhances adjustability for better enhanced coordination with other devices to achieve correct motor switching and ensures protection of the starter elements in order to guarantee the plant safety.

➔ **Precise Selection of Parameters**

Overload & short circuit settings with minimum step change helps to maintain balance between nuisance tripping and optimal protection resulting in high continuity of service and reduced call back periods. MTX release can be adapted to specific requirements of OEM or end-user.

➔ **DIP Switches**

DIP switches are provided on front side of the release for easy operations. These switches give you quicker option to precisely change selection, offering high life.

➔ **Overload Indication** ————— 4

Improves uptime and productivity by setting alarms for unbalanced loads so that proactive measures can be taken to avoid overload conditions.

% of $I_n$	Overload LED indication
30%	Green LED
85%	Faster blinking of green LED
115%	Sequential ON/OFF of green LED

➔ **Self Powered**

MTX releases do not need any external power supply hence require no extra devices and wires to power up.

**Note:** For wiring diagram, please refer page no. 62

## Various Protection Settings

Overload Protection, ( $I_r = x I_n$ )



DIP Switch Position							
Setting	Bypass	40%	45%	50%	55%	60%	65%

DIP Switch Position							
Setting	70%	75%	80%	85%	90%	95%	100%

## Thermal Memory

DIP Switch Position		
Setting	Bypass	ON

## Overload Curves

DIP Switch Position				
Setting	3s @ 6I <sub>r</sub>	10s @ 6I <sub>r</sub>	3s @ 7.2I <sub>r</sub>	10s @ 7.2I <sub>r</sub>

Short Circuit Setting, ( $I_s = x I_n$ )

DIP Switch Position							
Setting	Bypass	1.5	2.5	4.0	5.5	6.5	8.0

## Time Delay for Short Circuit Protection

DIP Switch Position		
Setting	Instantaneous	100ms

## Earth Fault Setting, ( $I_g = x I_n$ )

DIP Switch Position					
Setting	Bypass	20%	30%	40%	50%

## Time Delay for Earth Fault Protection

DIP Switch Position		
Setting	100ms	200ms

## Neutral Setting, ( $I_N = x I_n$ )

DIP Switch Position				
Setting	Bypass	50%	100%	150%*

## Time Delay for Neutral Protection

DIP Switch Position		
Setting	200ms	Follows O/L Curve

\* With maximum overload setting  $I_r = 0.65 I_n$

## Microprocessor Release

### Features of MTX3.0

- Overload Protection with inverse time delay
- $I^2t$ ,  $I^4t$ , SI, LI-VI based over load curves
- Short Circuit Protection with selectable time delay
- Instantaneous protection with fine settings
- Advanced current and voltage based protection function
- Protection against current unbalance and single phasing
- Comprehensive current, power and energy metering
- Inbuilt Earth fault and Neutral overload protection
- Provision of Thermal memory defeat
- Panel mounted O-LED display
- Communication through MODBUS RTU
- Pre-trip alarms
- True RMS sensing
- Power on LED
- "Push to Trip" button
- Self powered



MTX3.0	
Rated Current, $I_n$	From 40 to 1250A
<b>Overload (Phase)</b>	
Current setting, $I_r$ ( $I_r = x I_n$ )	40% to 100% $I_n$ in steps of 1%*
Time delay, $t_r$ (Inverse)	0.5s to 30s in steps of 0.1s*
Protection mode	ON / OFF
Preset trip alarm setting	50% to 90% $I_r$ in steps of 1%*
Thermal memory	Enable/Disable
<b>Overload (Neutral)</b>	
Current setting, $I_N$ ( $I_N = x I_r$ )	50% to 150% $I_r$ in steps of 1%*
Time delay, $t_N$	0.2s / same as overload
Protection mode	ON / OFF
<b>Short Circuit</b>	
Current setting, $I_s$ ( $I_s = x I_r$ )	1.5 to 8 $I_r$ in steps of 0.1*
Time delay, $t_s$	100ms, 200ms, 300ms, 400ms*
Protection mode	ON / OFF
Preset trip alarm setting	50% to 90% $I_s$ in steps of 1%*
<b>Instantaneous</b>	
Current setting, $I_i$ ( $I_i = x I_n$ )	1.5 to 8 $I_n$ in steps of 0.1*
Protection mode	ON / OFF
Preset trip alarm setting	50% to 90% $I_i$ in steps of 1%*
<b>Earth Fault</b>	
Current setting, $I_g$ ( $I_g = x I_n$ )	10% to 50% $I_n$ in steps of 5%*
Time delay, $t_g$	100ms to 500ms in steps of 50ms*
Protection mode	ON / OFF

\* Can be set using display module

**Note:** • Factory Settings - Address:0000, O/L: 100% $I_n$ , Curves: 6 $I_r$ @10s, S/C: 5.5 $I_r$  @ Instantaneous, Thermal Memory: Off, E/F: Off, Neutral: Off.

- Release provides in-built instantaneous override protection fixed @ 10 $I_n$

## MTX3.0 Additional features with Display Module

Current Protection	
Under Current	
Current setting (A) $I_{ui} (I_{ui} = x I_r)$	20 to 85% $I_r$ in steps of 1%
Time delay (s)	1 to 255 in steps of 1
Protection mode	ON / OFF
Preset trip alarm setting	110% to 150% $I_{ui}$ in steps of 1%
Current Unbalance	
Current setting (A)	30 to 90% $I_r$ in steps of 1%
Time delay (s)	0.5 to 60 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%

Voltage Protection	
Under Voltage	
Voltage setting (V) $V_{uv} (V_{uv} = x U_n)$	45 to 80% $U_n$ in steps of 1%
Time delay (s)	0.5 to 60 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	110 to 150% $V_{uv}$ in steps of 1%
Over Voltage	
Voltage setting (V) $V_{ov} (V_{ov} = x U_n)$	105 to 150% $U_n$ in steps of 1%
Time delay (s)	0.5 to 60 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% $V_{ov}$ in steps of 1%
Voltage Unbalance	
Voltage setting (V)	5 to 20% $U_n$ in steps of 1%
Time delay (s)	0.5 to 60 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
Residual Voltage	
Voltage setting (V)	5 to 40% $U_n$ in steps of 1%
Time delay (s)	0.5 to 60 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%

Frequency Protection	
Under Frequency	
Frequency setting (Hz)	F-0.5 to F-5.0 in steps of 0.5
Time delay (s)	0.1 to 30 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set freq in steps of 1%
Over Frequency	
Frequency setting (Hz)	F+0.5 to F+5.0 in steps of 0.5
Time delay (s)	0.1 to 30 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set freq in steps of 1%

## Protection Release for MCCBs

Power Protection	
Reverse Power	
Power setting (W) $P_R$	1 to 5000kW in steps of 1kW
Time delay (s)	0.5 to 60 in steps of 0.5
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% $P_R$ in steps of 1%
Lead Pf	
Pf setting	0.5 to 0.99 in steps of 1%
Time delay (ms)	100 to 500 in steps of 1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
Lag Pf	
Pf setting	0.5 to 0.99 in steps of 1%
Time delay (ms)	100 to 500 in steps of 1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%

Other Protections	
MD Active	
Demand settings	1 to 5000kW in steps of 1kW
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
MD Reactive	
Demand settings	1 to 5000kVAr in steps of 1kVAr
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
MD Apparent	
Demand settings	1 to 5000kVA in steps of 1kVA
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
Phase Sequence	
Phase seq setting	123 or 132
Time delay (s)	1 to 5 in steps of 0.1
Protection mode	ON / OFF
THD Current	
Current setting (A)	5 to 50% $I_r$ in steps of 1%
Time delay (s)	5 to 15 in steps of 5
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%
THD Voltage	
Voltage setting (V)	5 to 50% $U_n$ in steps of 1%
Time delay (s)	5 to 15 in steps of 0.1
Protection mode	ON / OFF
Preset trip alarm setting	50 to 90% of set value in steps of 1%

Metering & Display	
Current	Phase, Neutral & Earth
Voltage	Phase & Line
Frequency & power factor	True RMS
Power	Active, Reactive & Apparent
Energy	Active, Reactive & Apparent
Maximum demand	Active, Reactive & Apparent
THD	Current and voltage
Communication	
Protocol	MODBUS RTU
History	
Trip history	Last 10 trip records with non volatile memory
Event history	Last 10 event records with non volatile memory

## Advanced Features of MTX3.0

### Energy & Power Measurement

- ➔ One of the first steps towards energy efficiency is energy and power measurement. In MTX 3.0 release, in addition to current & voltage measurement, active, reactive and apparent energy & power can also be measured. This would enable monitoring energy at individual feeder level and thus help in implementing effective energy management practices in the plant. Moreover, using communication module, different parameters reading can be viewed on display module.



Energy and Power management functionality using voltage module



### ➔ Advanced Current and Voltage based protections

- **Reverse Phase:**

This function detects the phase reversal of current from the set sequence. It is especially important in motor feeder applications

- **Reverse Power:**

One can set the direction of power flow in a system from source to load and in case the direction of power flow reverses, the reverse power protection can be activated to trip the system. This is especially important in a DG set or in a ring mains system.




### ➔ Power Quality Control

MTX3.0 release measures the frequency, power factor and offers protection against leading and lagging values thereby assisting in maintaining the power quality. This release measures THD of current & voltage and gives an alarm / trip in case it exceeds the set thresholds.




### ➔ Communication Capable

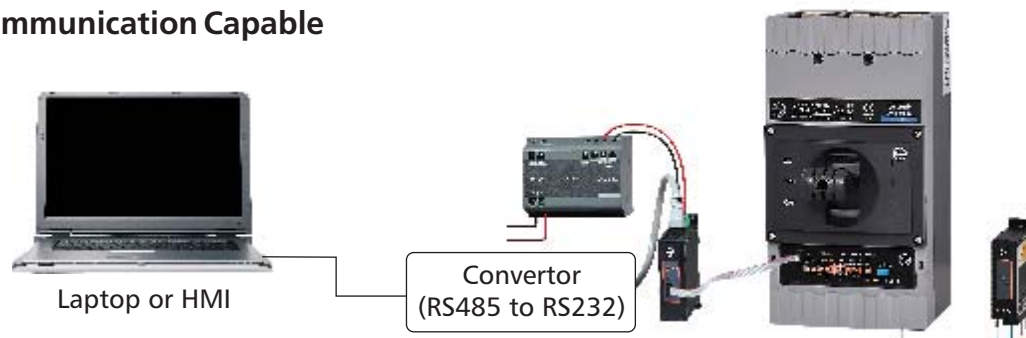

Most advanced release of MTX series, MTX3.0 is communication capable on MODBUS RTU network. Using MODBUS com module the MCCB release can be connected to a Personal Computer. The metering values can be read remotely. The settings configuration on the other hand can both be read and changed remotely. These releases are also made compatible with HMI (Human Machine Interface) & DCS (Data Control Systems)

➔ **Multi-looping**

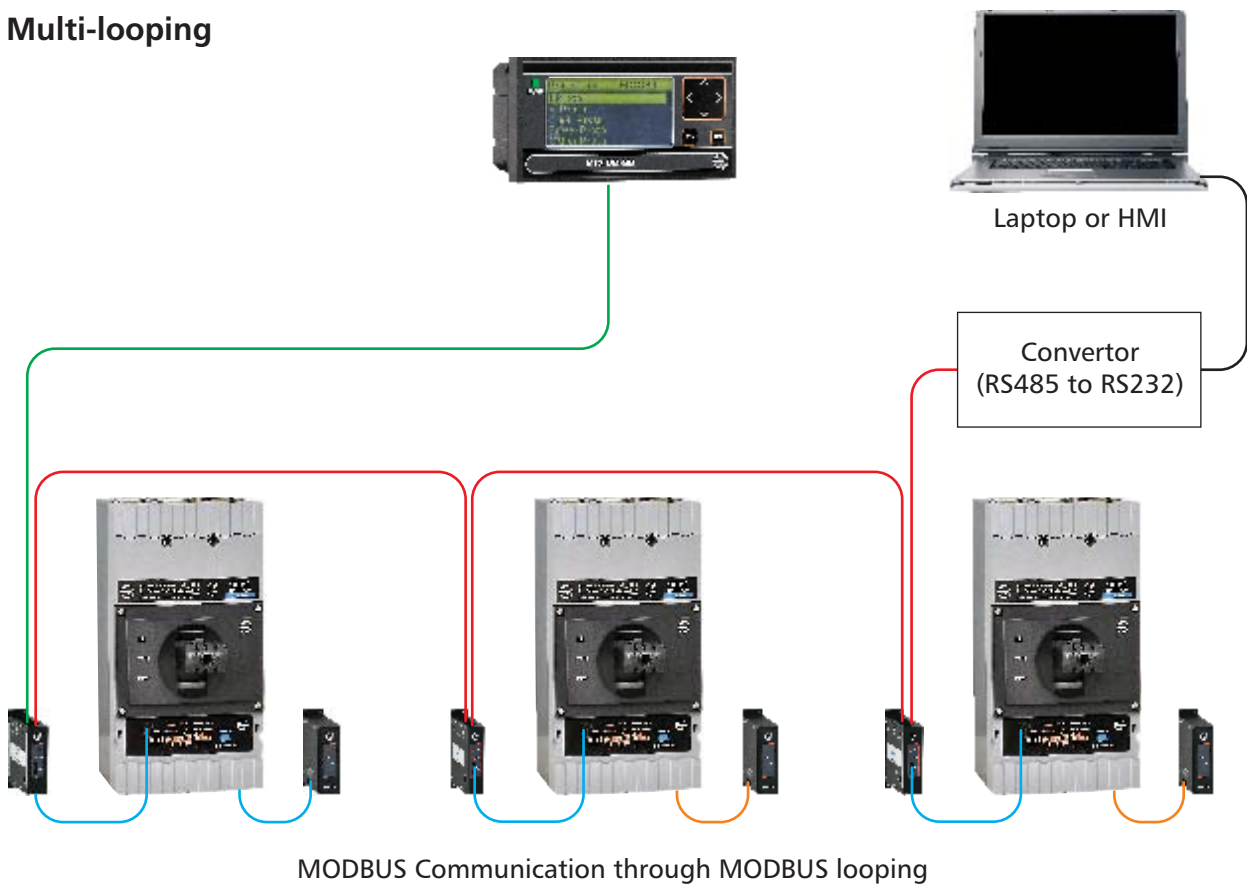

A single display module can be used to connect upto 15 MCCBs with MTX3.0 release through MODBUS network. Highly reliable data yet extremely simple looping reduces operational headaches and enhances remote accessibility.

➔ **Maintenance Functionality**

MTX3.0 release can store last 10 trip records & last 10 event records which can be used for the system analysis later on. These recorded values can be viewed from display unit as well as PC.

**Note:** For wiring diagram, please refer page no. 63

## Auto Source Transfer Application

In this modern era of automation, ASTS (Automatic Source Transfer Systems) are very widely used in many places such as commercial buildings, IT parks for quick changeovers and also in Utilities for uninterrupted supplies for critical loads.

These solutions can give you optimum energy management.

### ASTS solution basically consists of

- Motorised MCCBs
- Mechanical Interlocking device (usually a base plate)
- Automatic Transfer Controller

### ASTS with AuXC-1000 controller

The AuXC-1000 controller brings simplicity and flexibility to an auto source transfer system. It has been developed to control and supervise the automatic or manual transfer of a utility load from a principal power supply source to a stand-by and vice-versa. It sets a new benchmark in Auto Source Transfer Switch Controller technology. It includes all the necessary features to supervise and control power supply sources, composed by energy distribution systems or generating sets, and the relative transfer equipment, such as contactors, motorized moulded case circuit breakers and air circuit breakers.



MIL with Base Plate & EOM

AuXC-1000

### Key Features:

- Utility-to-utility, utility-to-generator or generator-to-generator changeover possible
- Three-phase, two-phase or single-phase voltage controls
- Controls of minimum voltage, maximum voltage, phase loss, asymmetry, minimum frequency, maximum frequency, with independent enable and delay
- Voltage thresholds with programmable hysteresis
- Manual control of Circuit Breakers
- Main line failure simulation
- Communication Capable
- Front display for monitoring the system voltage and frequency and for onsite controller programming
- Six programmable inputs and five programmable outputs
- Front test feature to simulate the operation of the diesel generator set
- Status indication through 22 LEDs
- Flush mounting arrangement

**Note:** For wiring diagram, please refer page no.60

## ASTS with AuXC-1000L Controller – Smarter, Simpler, Easier



MIL with Base Plate & EOM

With the new AuXC-1000L controller in addition to its predecessor, ASTS has become a lot simpler & easier. Some of the salient features of the controller are as follows:

- Utility-to-utility, utility-to-generator changeover facility
- Single supply input from battery supply 12-48V DC
- Display to view main and secondary line parameters
- 15 status LED indicators
- 6 programmable digital inputs
- 3 programmable relay outputs
- RS232 communication interface
- Modbus RTU and Modbus-ASCII communication protocols
- Status display of circuit breakers
- Emergency demand supervision parameter programming for stand by generator sets
- Event logging
- Alarm code & description display

The automatic transfer takes place through AuXC-1000L / AuXC-1000 whenever following conditions are predefined by the user

- System Voltage not in line with programmed limits
- The need to have a very reliable power source
- The need to use the most economical power source

These controllers are compatible with U-POWER OMEGA range of Electrical ACBs, dsine range of Motorized MCCBs and MCX range of contactors.



# Accessories

---

## ■ Internal Accessories

46

- Auxiliary Contact
- Trip Alarm Contact
- Auxiliary Trip Alarm Contact
- Shunt Release
- Under Voltage Release

## ■ External Accessories

47

- Rotary Operating Mechanism
- Mechanical Interlocking Kit
- Keylock
- Spreader Terminals
- Terminal Shrouds
- External Neutral CT
- Stored Energy Electrically Operated Mechanism
- MTX Modules
- Earth Fault Module

## Internal Accessories



MCCB with mid cover opened & Internal accessories fitted

dsine range of MCCBs are offered with snap-fit type, easily installable internal accessories. There is no need to open main cover and no live parts are accessed during installation. TAC, Aux+TAC to be fitted in the right cavity & under voltage release to be fitted in left cavity.

**Double Insulation:** The internal accessories are housed in insulated casings to ensure first level of insulation. When the front cover is opened for the fixing of internal accessories, the MCCB is totally insulated ensuring the double insulation.



Auxiliary Contact



TAC



Shunt Release



UV Release

Internal Accessories	Contacts/Supply Voltage	Frame	Cavity
Auxiliary Contact	1 C/O	DN0, DN1	Right
		DN2, DN3, DN3B, DN4	Right/Left
	2 C/O	DN0, DN1	Right
		DN2, DN3, DN3B, DN4	Right/Left
Trip Alarm Contact	1 C/O	DN0, DN1	Right
		DN2, DN3, DN3B, DN4	Right
	2 C/O	DN0, DN1	Right
Auxiliary + Trip Alarm Contact	1 C/O + 1 C/O	DN0, DN1	Right
		DN2, DN3, DN3B, DN4	Right
Shunt Release	240/415V AC 50Hz	DN0, DN1	Left
	110/415V AC 50Hz, 110/220V, 24V DC	DN2, DN3, DN3B, DN4	Right/Left
Under Voltage Release	240V AC	DN0, DN1	Left
		DN2, DN3, DN3B	
		DN4	

## Shunt Release

It allows opening of MCCB by means of an electrical command. Operation of the release is guaranteed for a voltage between 70% and 110% of the rated power supply voltage value  $U_e$ , both in AC & DC.

Frame	Operational Voltage	Power Consumption
DN0 / DN1	240 / 415V AC, 50Hz	1500VA
DN2 / DN3 / DN3B / DN4	110 - 415V AC, 50Hz	1500VA
	110 / 220V DC	85W
	24V DC	10W

## UV Release

The Under-voltage release causes the MCCB to trip if the operational voltage falls to a value between 35% and 70% of its rated voltage or not applied. UV release mechanically locks the closing mechanism of MCCB & makes it impossible to close on under-voltage or no voltage, both manually & electrically. With the under-voltage release de-energized, it is not possible to close the MCCB. UV release can also be used for interlocking schemes (for DG synchronization, paralleling of transformers etc) also.

Frame	Operational Voltage	Power consumption
DN0 / DN1	240V AC, 50Hz	5VA
DN2 / DN3 / DN3B	240V AC, 50Hz	5VA
DN4	240V AC, 50Hz	5VA

## External Accessories

### Rotary Operating Mechanism

Rotary operating mechanism (ROM) for dsine MCCBs are available in direct & extended versions.

#### 1. Direct Rotary Handle (MCCB mounted)

- Available for entire family of dsine MCCBs
- In built pad locking feature



Direct Rotary Handle (MCCB mounted)

#### 2. Extended Rotary Handle (Panel Mounted)

- ROM mounts directly on MCCB without removal of mid cover
- Clear ON/OFF/TRIP indication
- Clear view of MCCB rating label
- Direct access to "Push to Trip" button
- IP 54 degree of protection with extended rotary handle
- Unique coupling to allow  $\pm 3\text{mm}$  tolerance
- Door interlock in ON position, with defeat facility
- Door interlock in OFF condition with padlock feature
- Auto restoration of door interlock
- External keylock for mechanical interlocking



Extended Rotary Handle: Panel Mounted



Panel Door Mounted Key lock (To be used along with Extended Rotary Handles)

## Mechanical Interlocking Schemes

### 1. Mechanical Interlocking Kit:

Two MCCBs can be interlocked using base plate mechanism, in side-by-side configuration.

#### ➔ Features

- For 3P & 4P versions
- For DN2 & DN3 frames
- Site fittable



MIL with Base Plate




## 2. Mechanical Interlocking using Key Locks:

For mechanical interlocking through extended rotary operating mechanism, a panel mounted key lock is available. The selection of the key lock as per the table:

I/C or B/C	Key Lock
2 I/C	Any 1 type of lock for both MCCBs
2 I/C and 1 B/C	Lock 1 and Lock 2 for I/C and Lock 12 for B/C
3 I/C and 2 B/C	Locks 1, 2, 3 for I/Cs and Locks 12, 23 for B/Cs

### Key Lock Selection:

Type of lock	Exclusively operable by key nos.
1	1
2	2
3	3
12	1, 2 & 12
23	2, 3 & 23

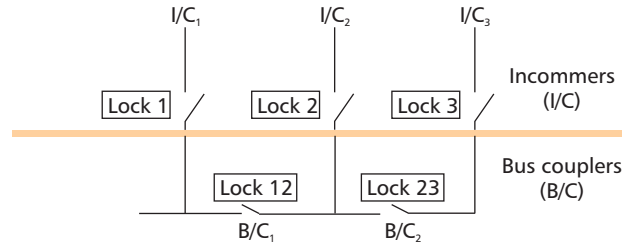

### Spreader Terminal

- Available for enhancing termination capacity
- Made of silver plated copper



### Terminal capacity without spreader terminals

Rating (A)	16-100		125-250		320-630		800-1250	
dsine Frame	Cable (mm <sup>2</sup> )	Link(mm)	Cable (mm <sup>2</sup> )	Link(mm)	Cable (mm <sup>2</sup> )	Link(mm)	Cable (mm <sup>2</sup> )	Link(mm)
DN0	35	17						
DN1			120	26				
DN2			95	25				
DN3					120	27 <sup>s</sup>		
DN3B*					185	32		
DN4							-	2 x 40

\$ 30mm on request

### Terminal capacity with spreader terminals

Rating (A)	16-100		125-250		320-630		800-1250	
dsine Frame	Cable (mm <sup>2</sup> )	Link (mm)	Cable (mm <sup>2</sup> )	Link (mm)	Cable (mm <sup>2</sup> )	Link (mm)	Cable (mm <sup>2</sup> )	Link (mm)
DN0	50	22						
DN1			185	35				
DN2			185	35				
DN3					2 x 240	2 x 40		
DN3B*					2 x 240	2 x 40		
DN4							2 x 300	2 x 60

\* DN3B available in 320A and 400A only

**Note:** Phase barriers are supplied along with MCCBs ; Copper termination recommended for enhanced performance

## External Neutral CTs

- Used to provide neutral protection to 3P MCCBs in 3 phase 4 wire system
- Available for 3P MCCBs with MTX2.0 & 3.0 releases
- Adapters for NCT available



## Stored Energy Electrically Operated Mechanism

- ON / OFF & Charged/Discharged indication
- Foolproof mounting
- Selector switch for Auto/Manual operation
- Padlock facility for locking in OFF position (3 nos. locks)
- Higher mechanical & electrical endurance
- Back up fuse for extended motor protection
- Easy access to the protection setting on MCCB
- True indication for ON/OFF & Trip



Specification	DN2	DN3
Operating voltage (V AC)	240V AC	240V AC
Operating voltage (%)	85-110%	85-110%
Closing time (ms)	60	90
Opening time (ms)	300	450
Power consumption (VA)	350	500
Life / No. of operations	16000	15000
Door cut out (mm <sup>2</sup> )	96 x 96	96 x 96
IP protection, on the front	IP30	IP30
Operating frequency	2/min	1/min
Min. control impulse time (ms)*	300	450

## Power Supply (PS) Module

PS module is used to power ON dsine MTX modules when auxiliary 24Vdc supply is not available.

Specifications	AC	DC
Input	85-265V	125-300V
Output 1	-	650mA at 24V DC
Output 2 <sup>#</sup>	-	200mA at 24V DC

<sup>#</sup> For using Output 2, Output 1 should be loaded

**Note:** For wiring diagram, please refer page no. 63

\* At rated voltage



### ➔ Current Metering Module for MTX2.0

It consists of 2 parts viz. Metering module & Display module. Metering module collects the data from the release and sends the same to the Display module. The panel mounted O-LED Display module shows various parameters viz. 3 phase currents, neutral and ground fault currents, if any. We can also view last trip records.

### ➔ Communication Module for MTX3.0

The Communication module is solutions for connecting dsine MCCBs to Modbus network for remote supervision and control of circuit breaker. It is suitable for the MTX3.0 electronic trip units across DN2/DN3/DN4 frames. It is available with DIN rail mounting facility. 2 LEDs in front fo the module indicates

- The Power LED - the presence of auxiliary power supply to the module
- The Data LED - transmission of data

Its operating temperature is  $-25^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  and consumption is 43mA



### ➔ Voltage Module for MTX3.0

This accessory when connected to MTX 3.0 release in DN2/DN3/DN4 frames is able to provide the various measurements of the electrical values of the plant. It has to be mounted just beside the MCCB on a DIN plate. Its operating temperature is  $-25^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .



### ➔ Display Module for MTX3.0

It is a panel mounted O-LED display unit that can be integrated with MTX3.0 release in DN2/DN3/DN4 frames. It has one navigation key, a select button and an exit button. Its operating temperature is  $-25^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  and consumption is 12mA

The module displays wide range of parameters as follows

- Phase current, ground current, earth leakage current
- Phase / Line voltage
- Active / Reactive / Apparent Power
- Power factor, Frequency
- Energy
- Maximum demand
- THD



### ➔ MTX Test Kit

- Universal Test Kit for all MTX releases
- Simulation of overload, short-circuit & earth fault
- Single phase AC supply

**Note:** For wiring diagram, please refer page no. 63

## Earth Fault Module

Earth Fault Modules Type GF1, GF2 and GF11. These modules are to be used with MCCBs for earth fault protection. The principle of operation is based on detection of the residual current in the system. They combine safety and versatility, conforming to the high performance standards, the characteristic of all L&T products.



**Earth Fault Module GF1**  
GF1 is suitable upto 200A MCCBs



**Earth Fault Module GF2**  
GF2 is suitable upto 250A-400A MCCBs



**Earth Fault Module GF11**  
GF11 is suitable upto 800A MCCBs

### Features:


- Compact in size
- Solid state design.
- Built-in moulded CBCT for GF1 & GF2. External CTs are to be used for GF11.
- Suitable for both 3 phase 3 wire & 3 Phase 4 wire systems. In case of 3 phase 4 wire system, the neutral cable/twisted link should also be passed through the CBCT along with the 3 phase links / cables.
- Built-in test facility.
- Selection facility for nominal current rating (In).
- Earth fault setting is adjustable from 10% to 50% of set current
- Selectable trip times (100 ms, 200 ms).
- Manual reset for positive fault acknowledgment.
- Potential free NO contact to trip MCCB (through 240 V shunt release).
- Window dimensions suitable for Cable connection only in GF1 and GF2.

**Note:** MCCBs need to be fitted with 110 V / 240 V AC shunt release for Earth Fault Module operation.

## Technical Data

Specification	Type GF1 / GF2 / GF11
Current Setting Range, $I_s$ ( $I_s = x I_n$ )	10% to 50%In in steps of 10%
Auxiliary Supply	240V AC $\pm 20\%$
Time Delay (ms)	100 / 200ms Field selectable
Pick-up Accuracy	$\pm 10\% I_s$
Output Contact	1 NO contact manual reset Type contact rating 5A 240V AC
Indication	a) Power On LED b) Trip LED (manual reset)
Operating Temperature	+10°C to +55°C
Insulation	2 kV 50Hz for one minute across independent circuit 1 kV 50Hz for one minute across open contacts
Mounting	Base plate mounting type
Window for Cable / Busbar entry (mm <sup>2</sup> )	GF1 - 110 x 32 GF2 - 165 x 61.5
Weight (kg)	GF1 - 1.2, GF2 - 2.2, GF11 - 0.9

**Note:** For wiring diagram, please refer page no. 61

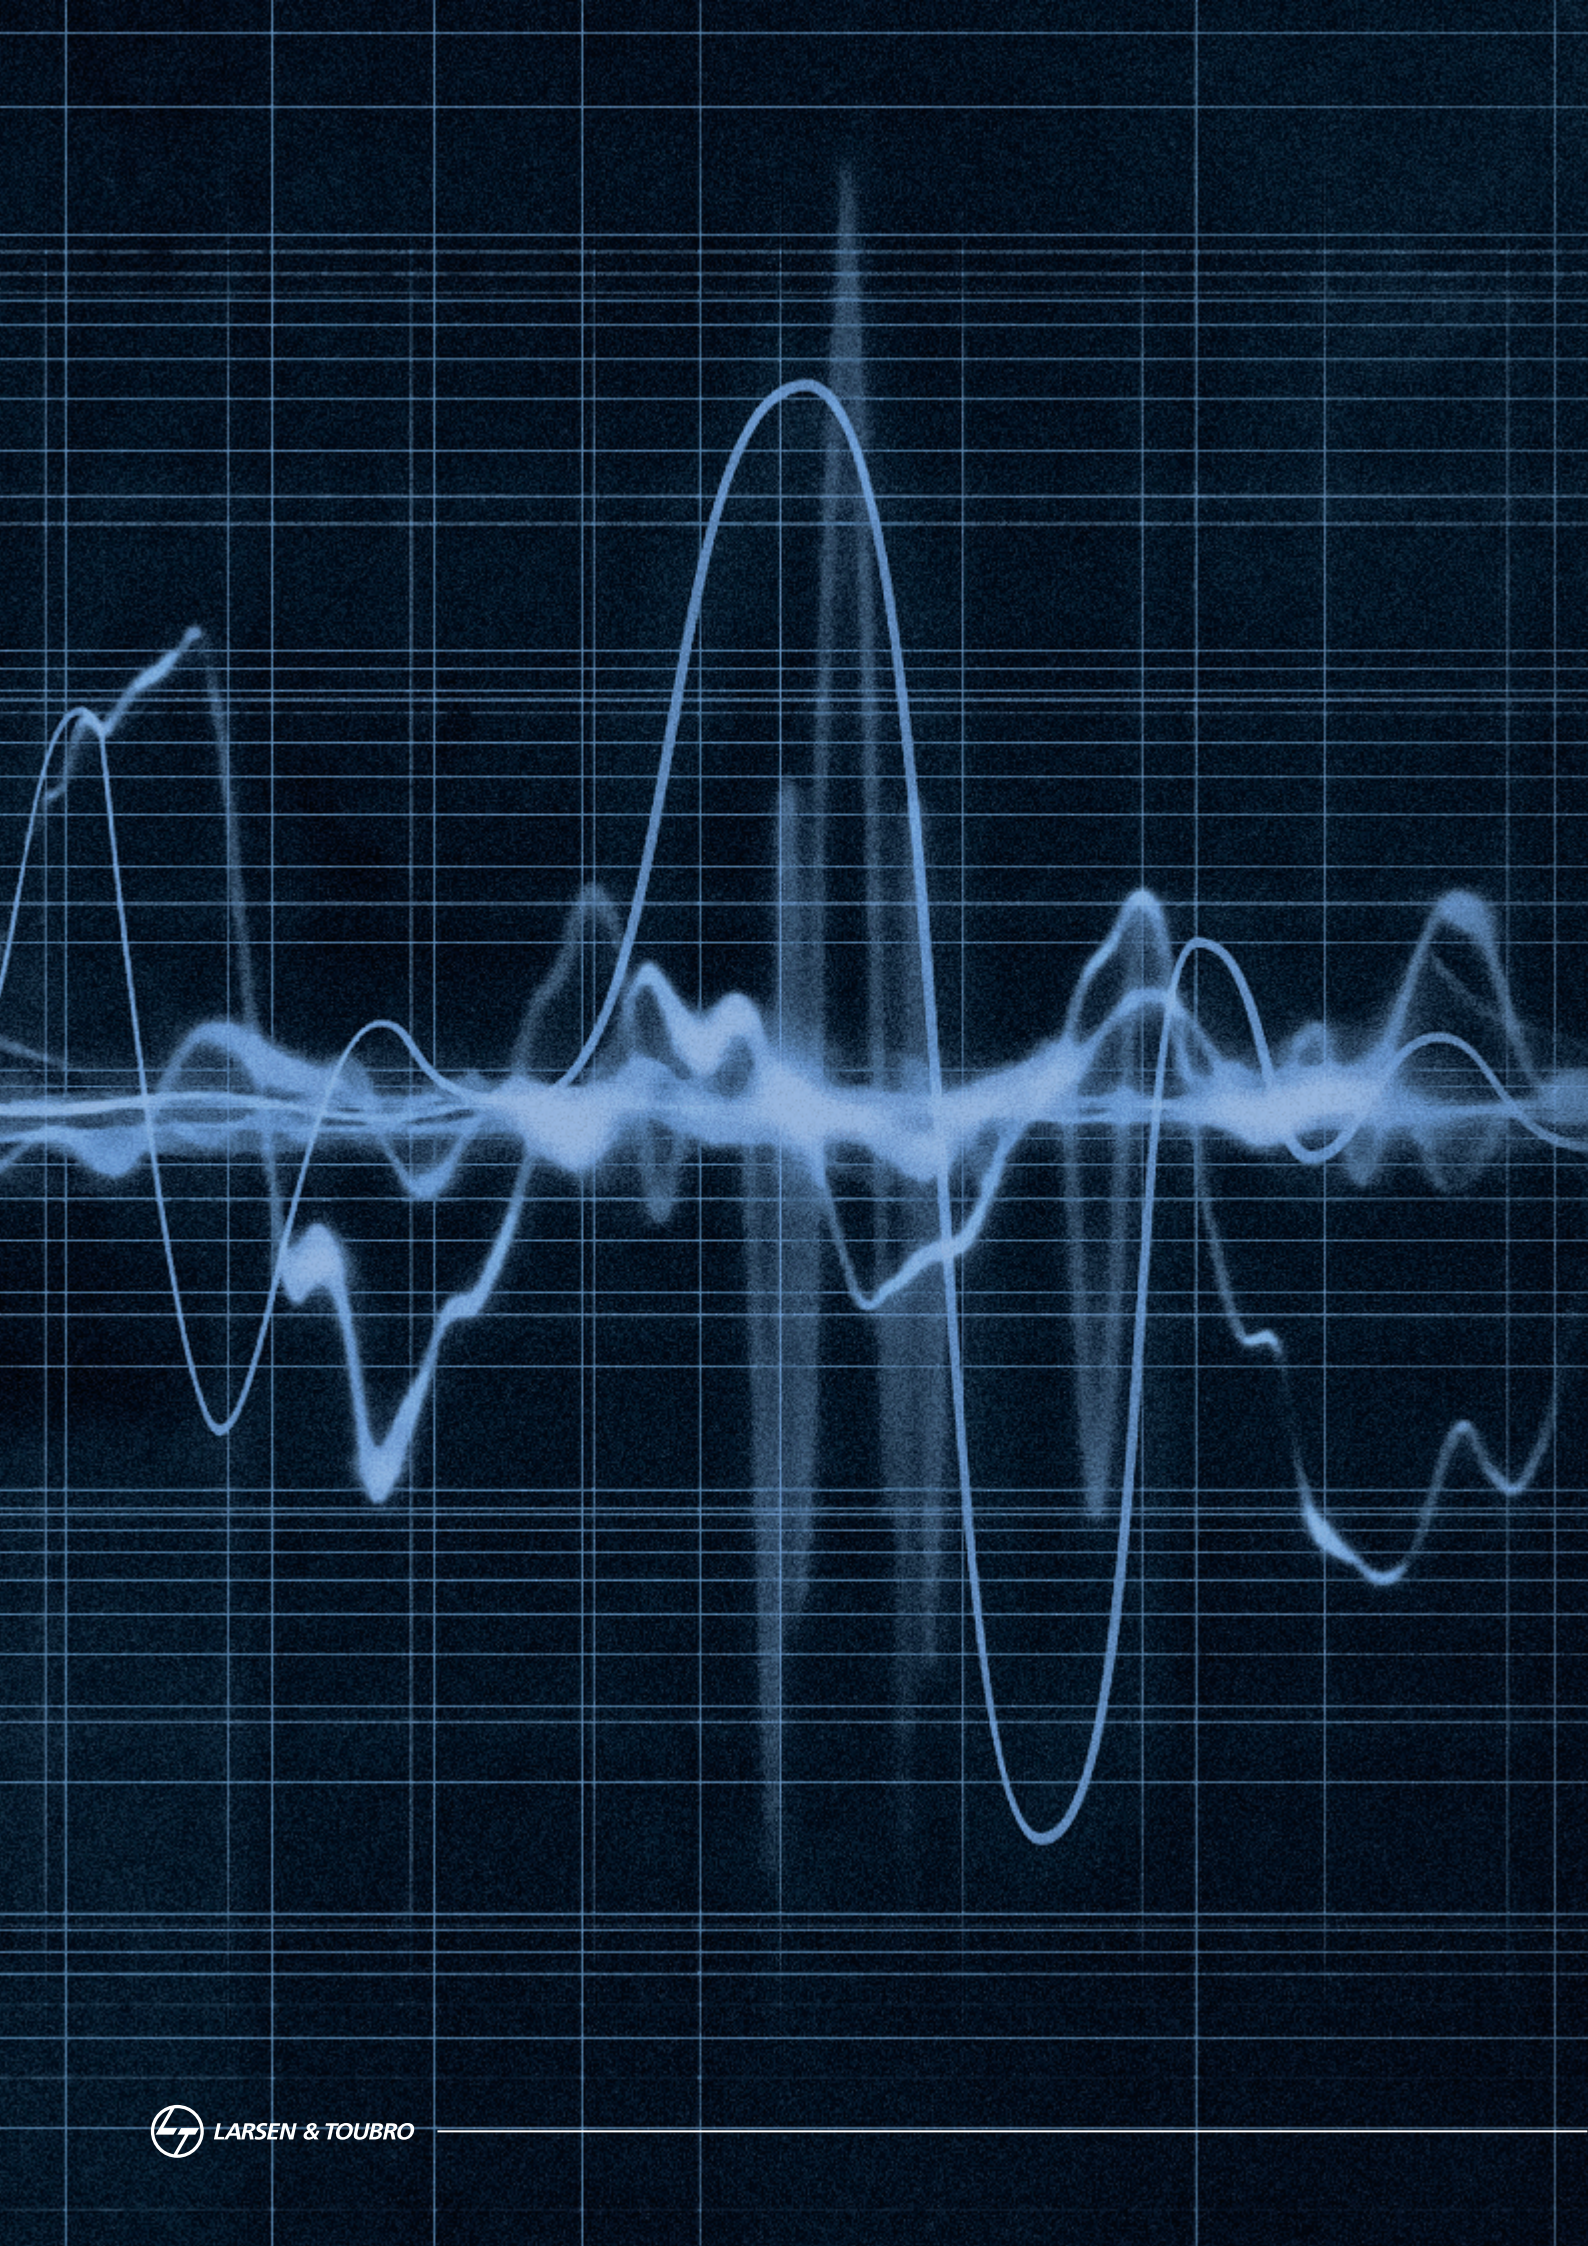

# Characteristic Curves

---

## ■ Thermal Magnetic Release

54






- ▶ DN0
- ▶ DN1
- ▶ DN2
- ▶ DN3B
- ▶ DN3

## ■ Microprocessor Release

55

- ▶ MTX1.0-2.0 (O/L curves)
  - $I^2T$  at  $6I_r$ ,  $7.2I_r$
  
- ▶ MTX3.0 (O/L curves)
  - $I^2T$  at  $1.5I_r$ ,  $6I_r$ ,  $7.2I_r$
  - $I^4T$  at  $1.5I_r$ ,  $6I_r$ ,  $7.2I_r$
  - SI at  $1.5I_r$ ,  $6I_r$ ,  $7.2I_r$
  - LI-VI at  $1.5I_r$ ,  $6I_r$ ,  $7.2I_r$
  - Short circuit, Earth fault & Neutral curves For MTX1.0-2.0-3.0

## Thermal-Magnetic Release

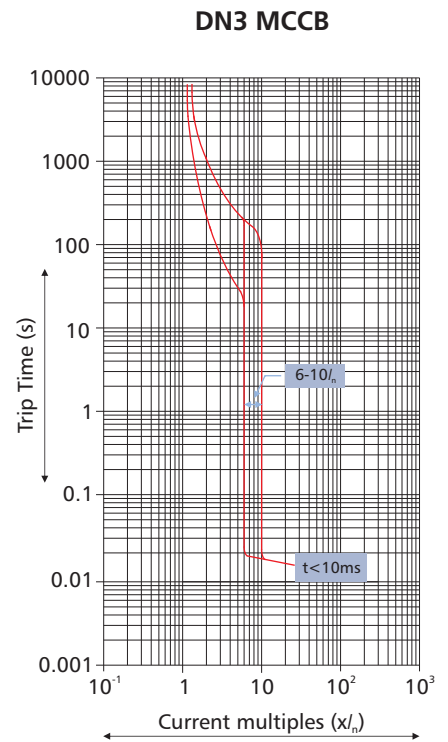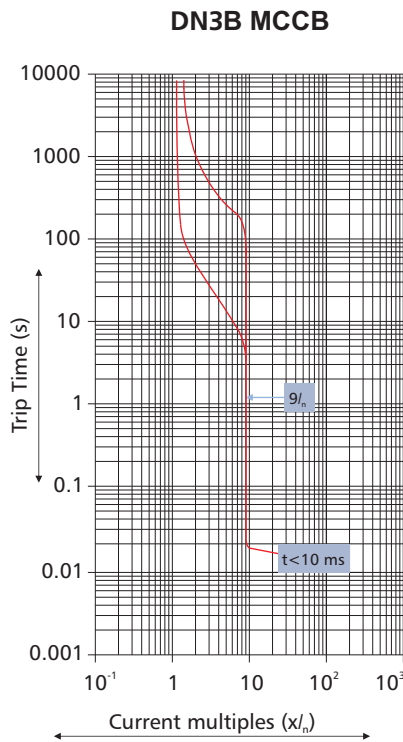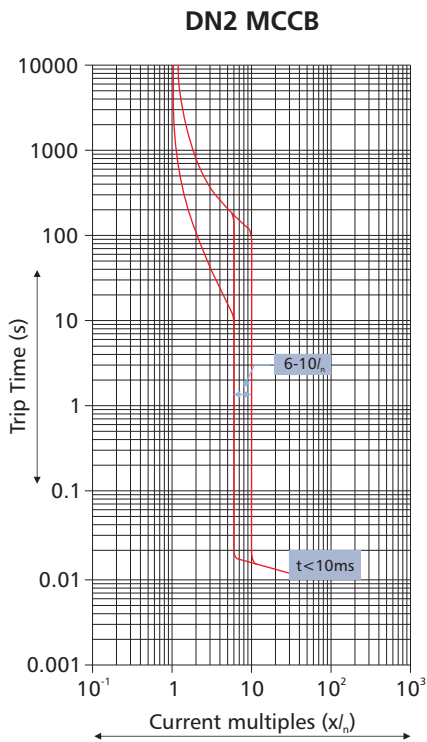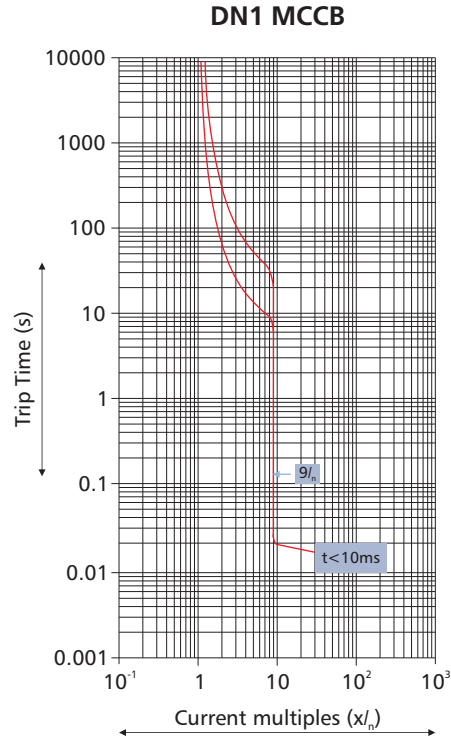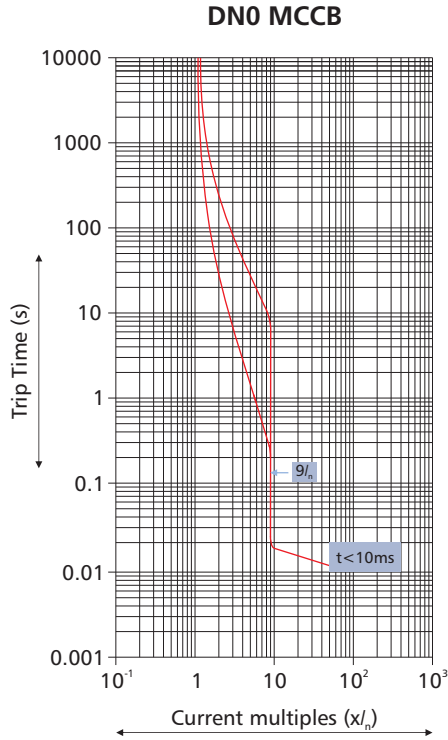


Note: Curves are Ir based till overload zone.


## Microprocessor Release



### MTX1.0 / 2.0 - DN2 / DN3 / DN4 (O/L curves - $I^2t$ )

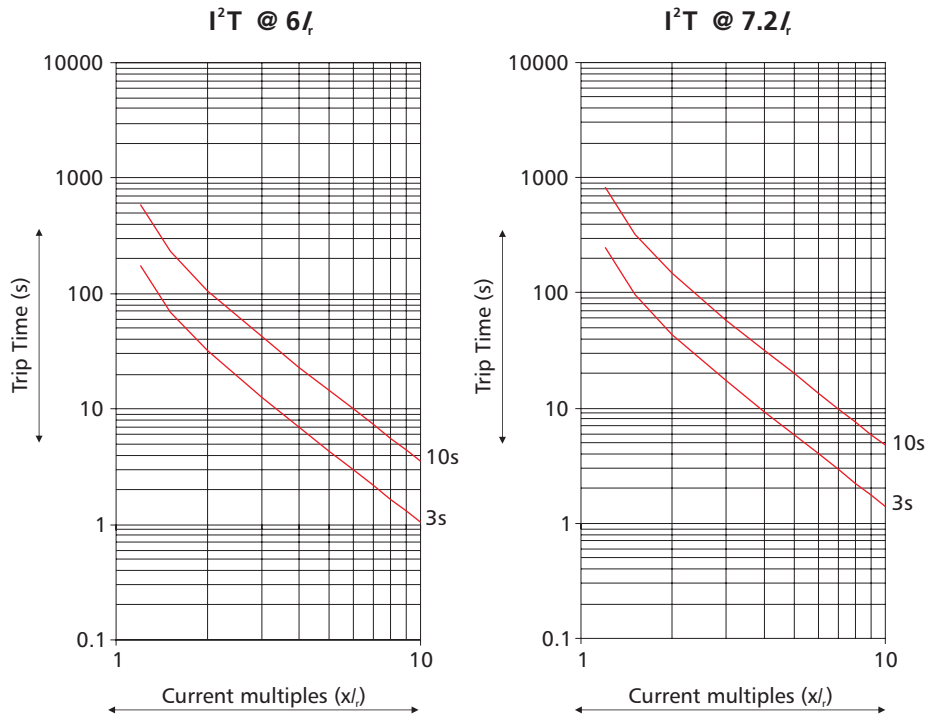

### MTX3.0 - DN2 / DN3 / DN4 (O/L curves - $I^2t$ )

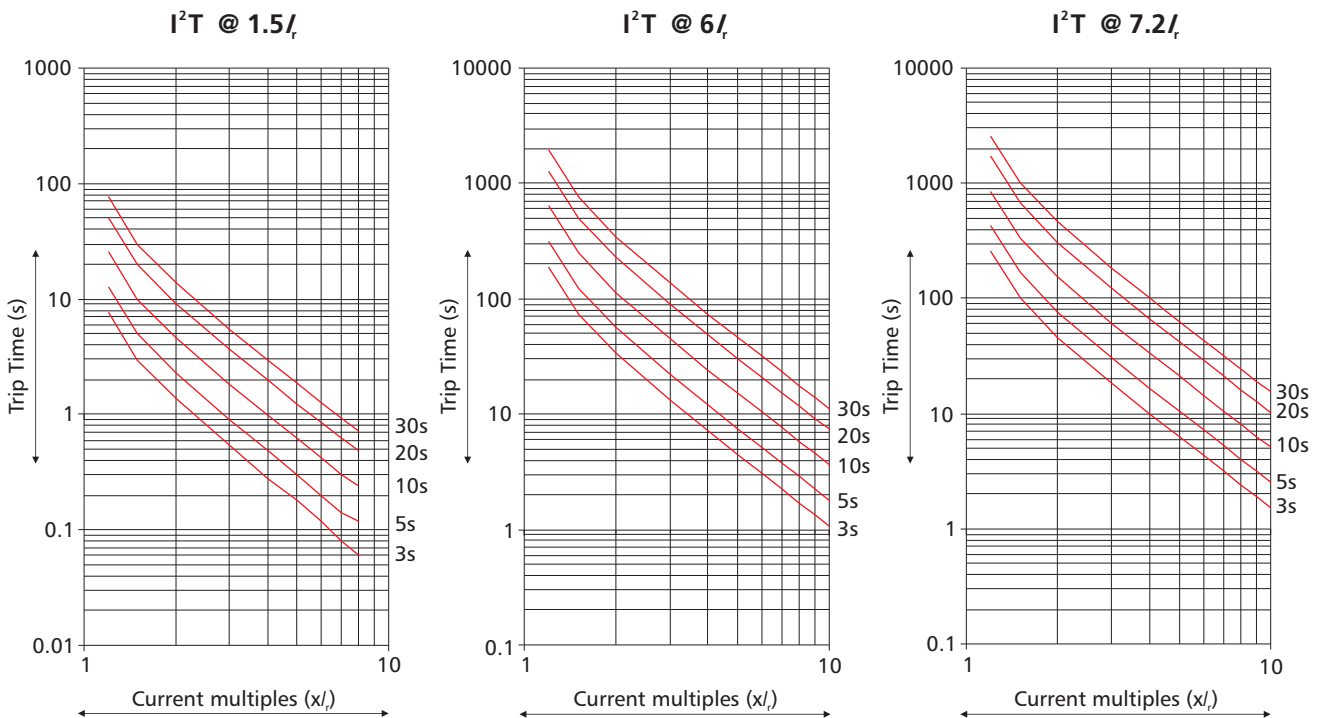





## Microprocessor Release



### MTX3.0 - DN2 / DN3 / DN4 (O/L curves - $I^4t$ )

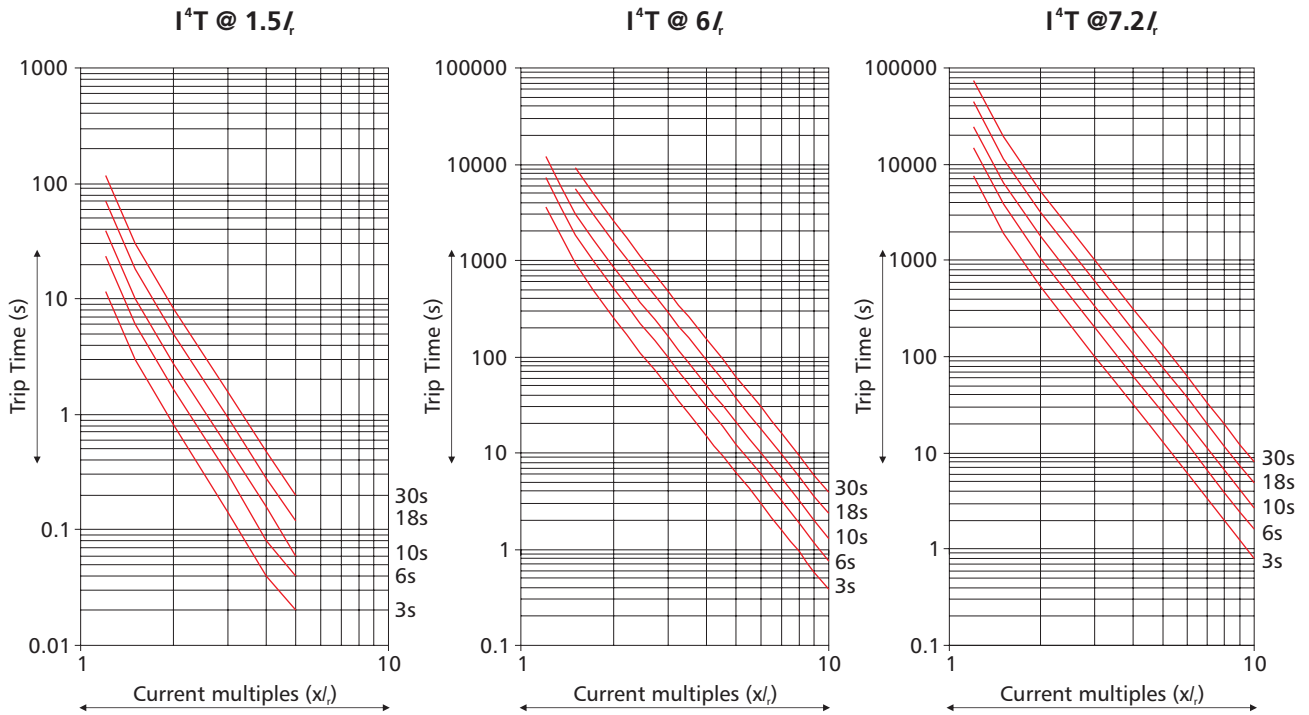


### MTX3.0 - DN2 / DN3 / DN4 (O/L curves - Short Inverse)

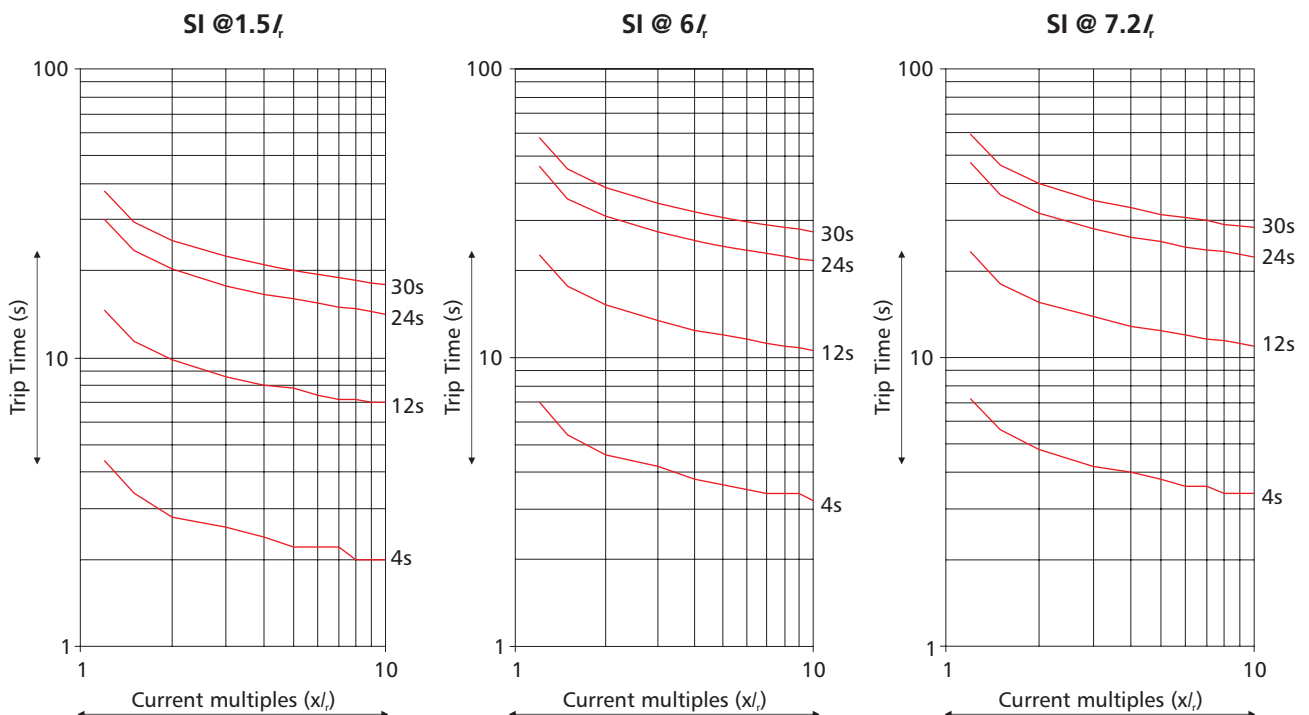


## Microprocessor Release

MTX3.0 - DN2 / DN3 / DN4  
(O/L curves - Long Inverse / Very Inverse)

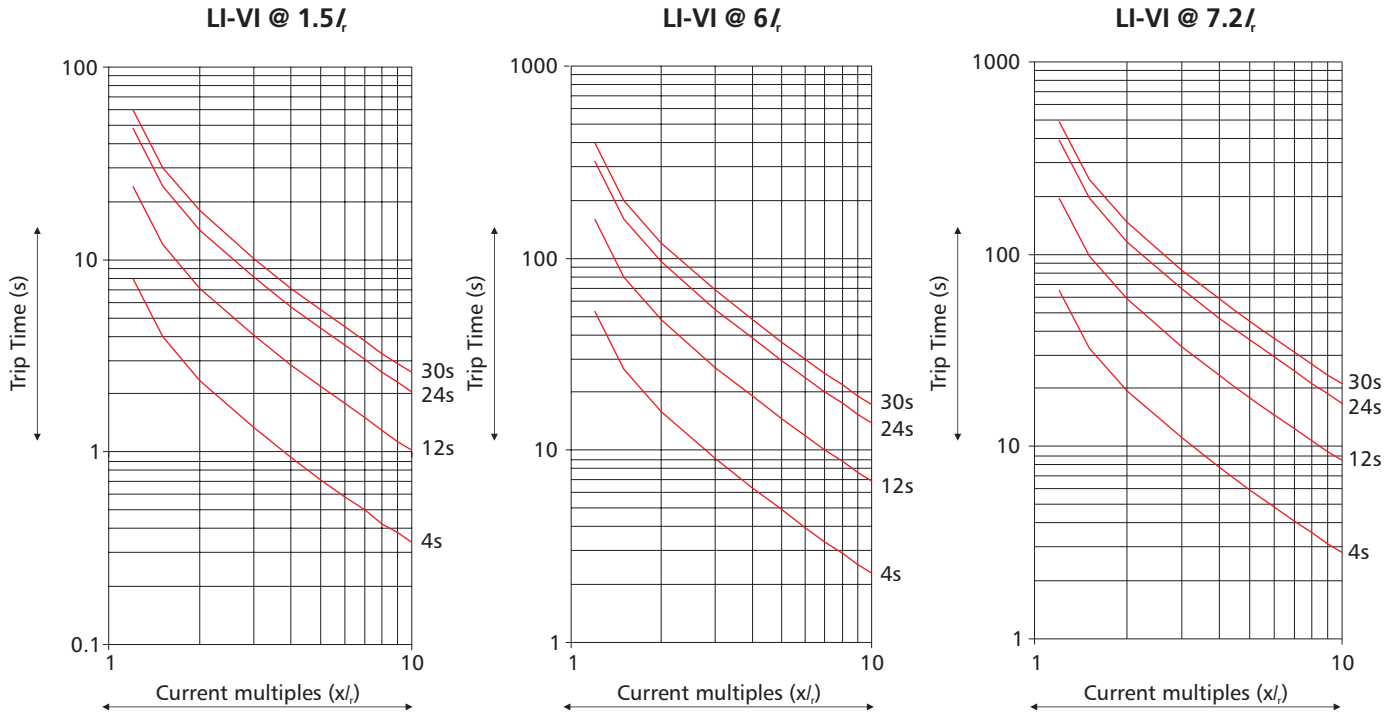

## MTX1.0\* / 2.0 / 3.0 (S/C, E/F & Neutral Curves)

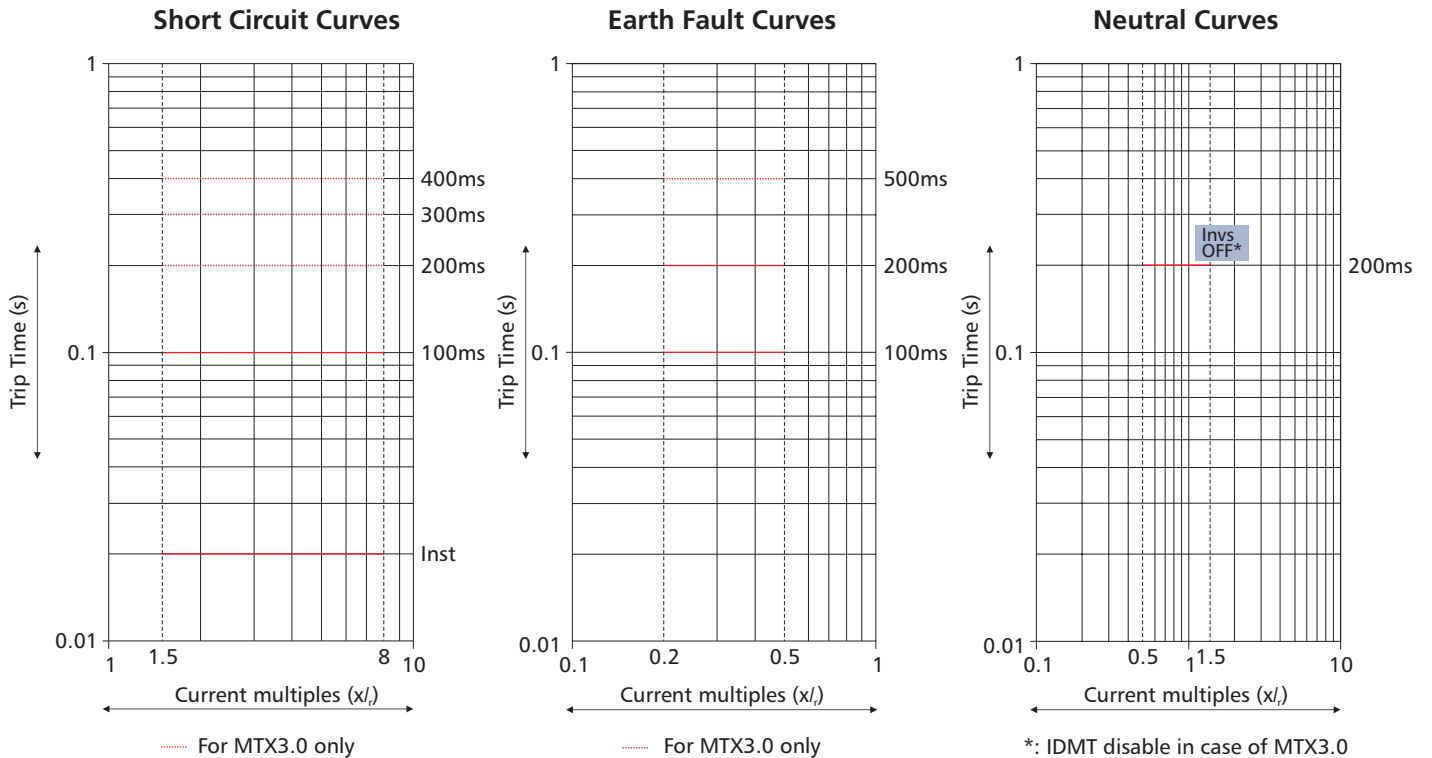

\* Only Short Circuit setting available in MTX1.0  
• Under Short Circuit fault conditions, MCCBs will clear the fault in less than 10 msec




# Wiring Diagrams

---


- Motorised Circuit Breakers Control through AuXC - 1000 & AuXC - 1000L 60
- Earth Fault Modules 61
- MTX2.0 with Current Metering Module 62
- MTX3.0 with Communication through Modbus 63

## Motorised Circuit Breakers Control through AuXC - 1000

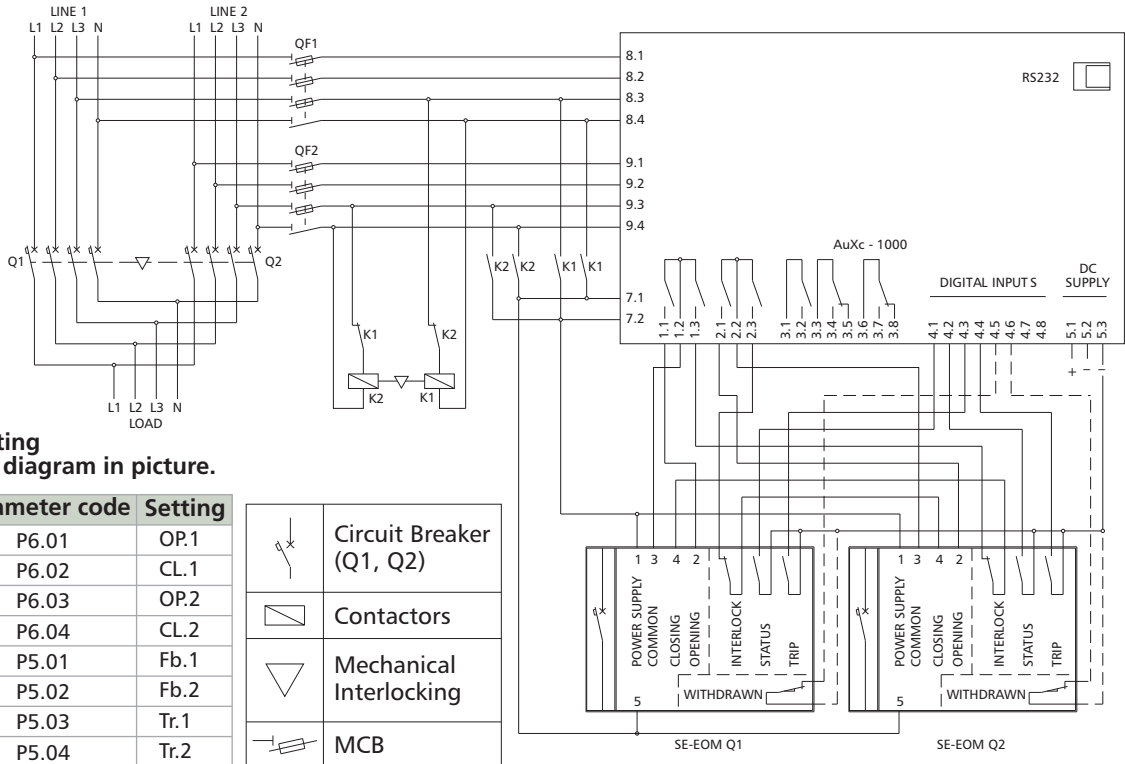


Parameter setting for the wiring diagram in picture.

Terminal	Parameter code	Setting
1.1	P6.01	OP.1
1.3	P6.02	CL.1
2.1	P6.03	OP.2
2.3	P6.04	CL.2
4.1	P5.01	Fb.1
4.2	P5.02	Fb.2
4.3	P5.03	Tr.1
4.4	P5.04	Tr.2




## Motorised Circuit Breakers Control through AuXC - 1000L

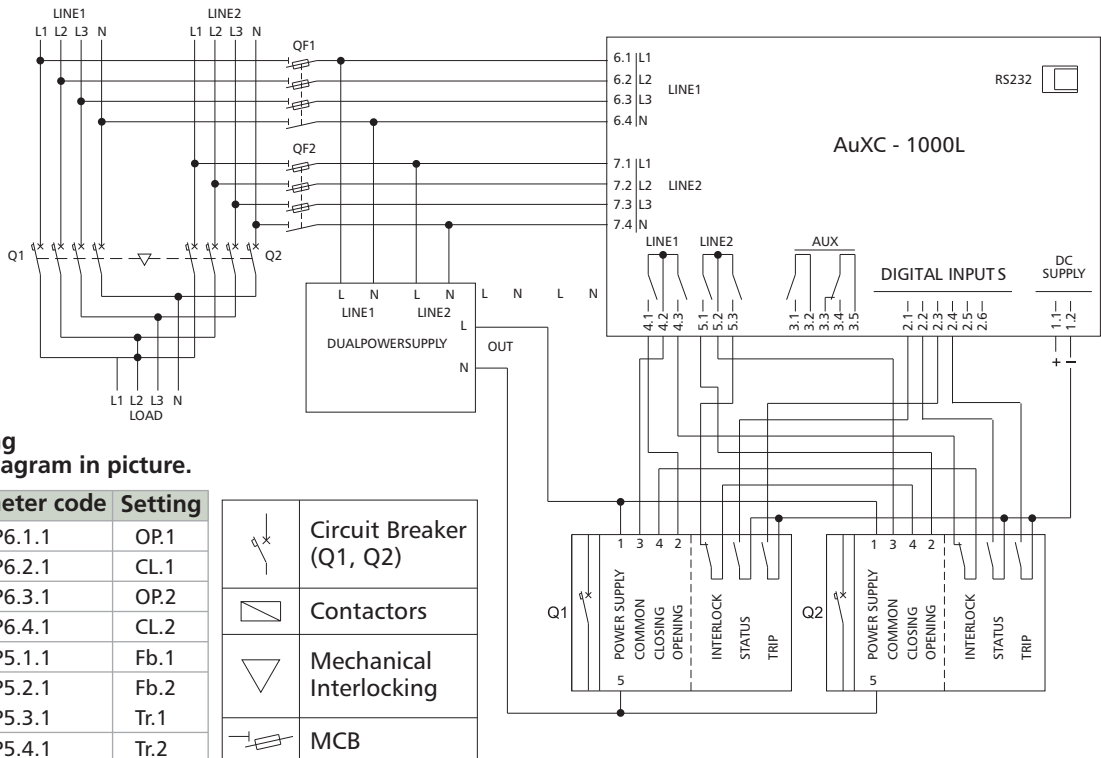


Parameter setting for the wiring diagram in picture.

Terminal	Parameter code	Setting
4.1	P6.1.1	OP.1
4.3	P6.2.1	CL.1
5.1	P6.3.1	OP.2
5.3	P6.4.1	CL.2
2.1	P5.1.1	Fb.1
2.2	P5.2.1	Fb.2
2.3	P5.3.1	Tr.1
2.4	P5.4.1	Tr.2




## Earth Fault Modules


### GF1 & GF2

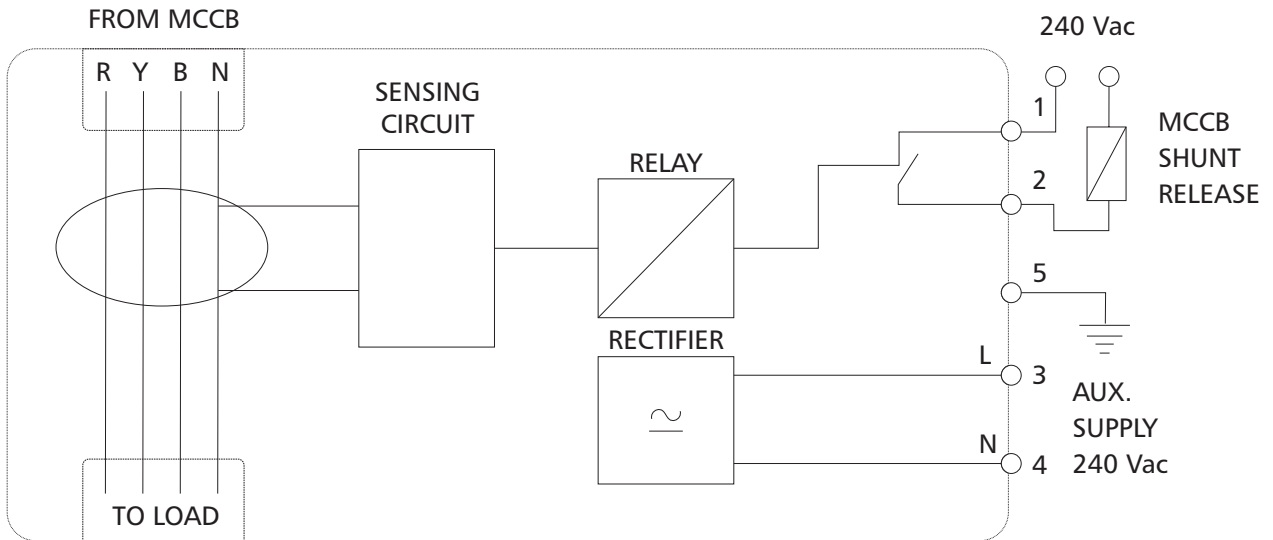


### GF11

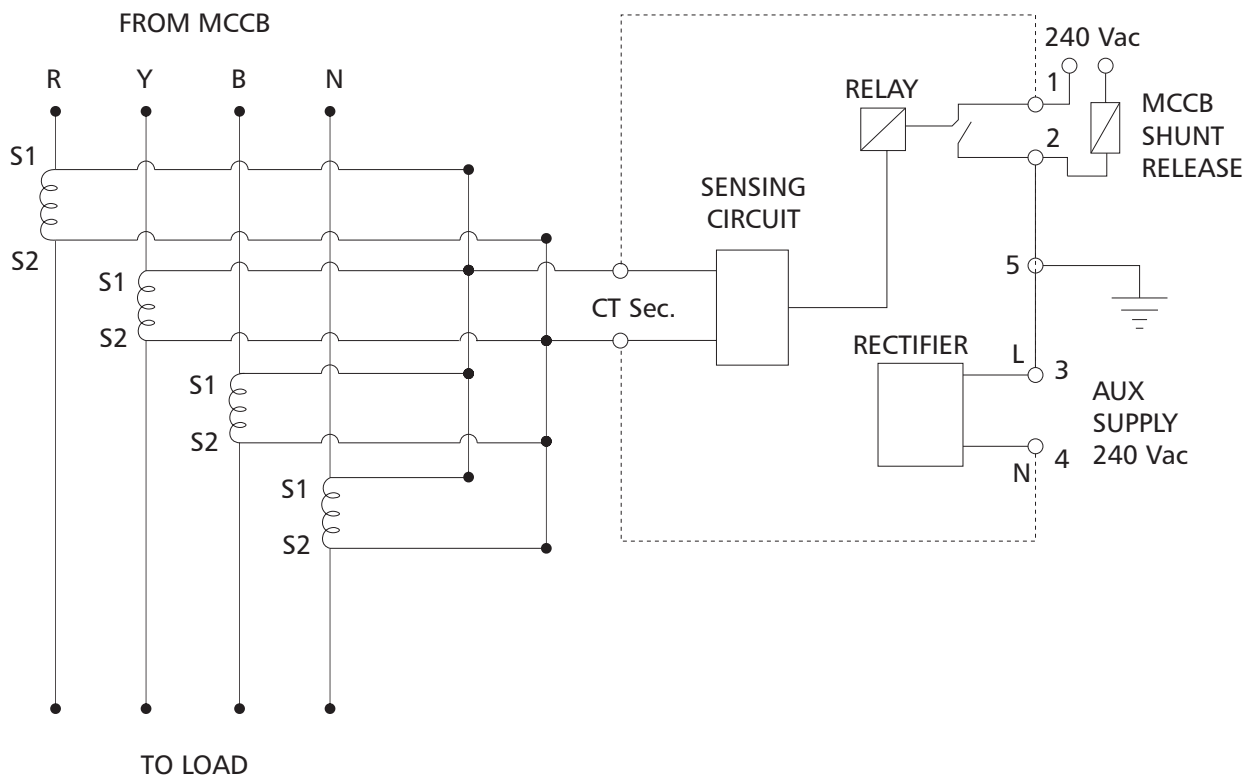

## MTX2.0 with Current Metering Module

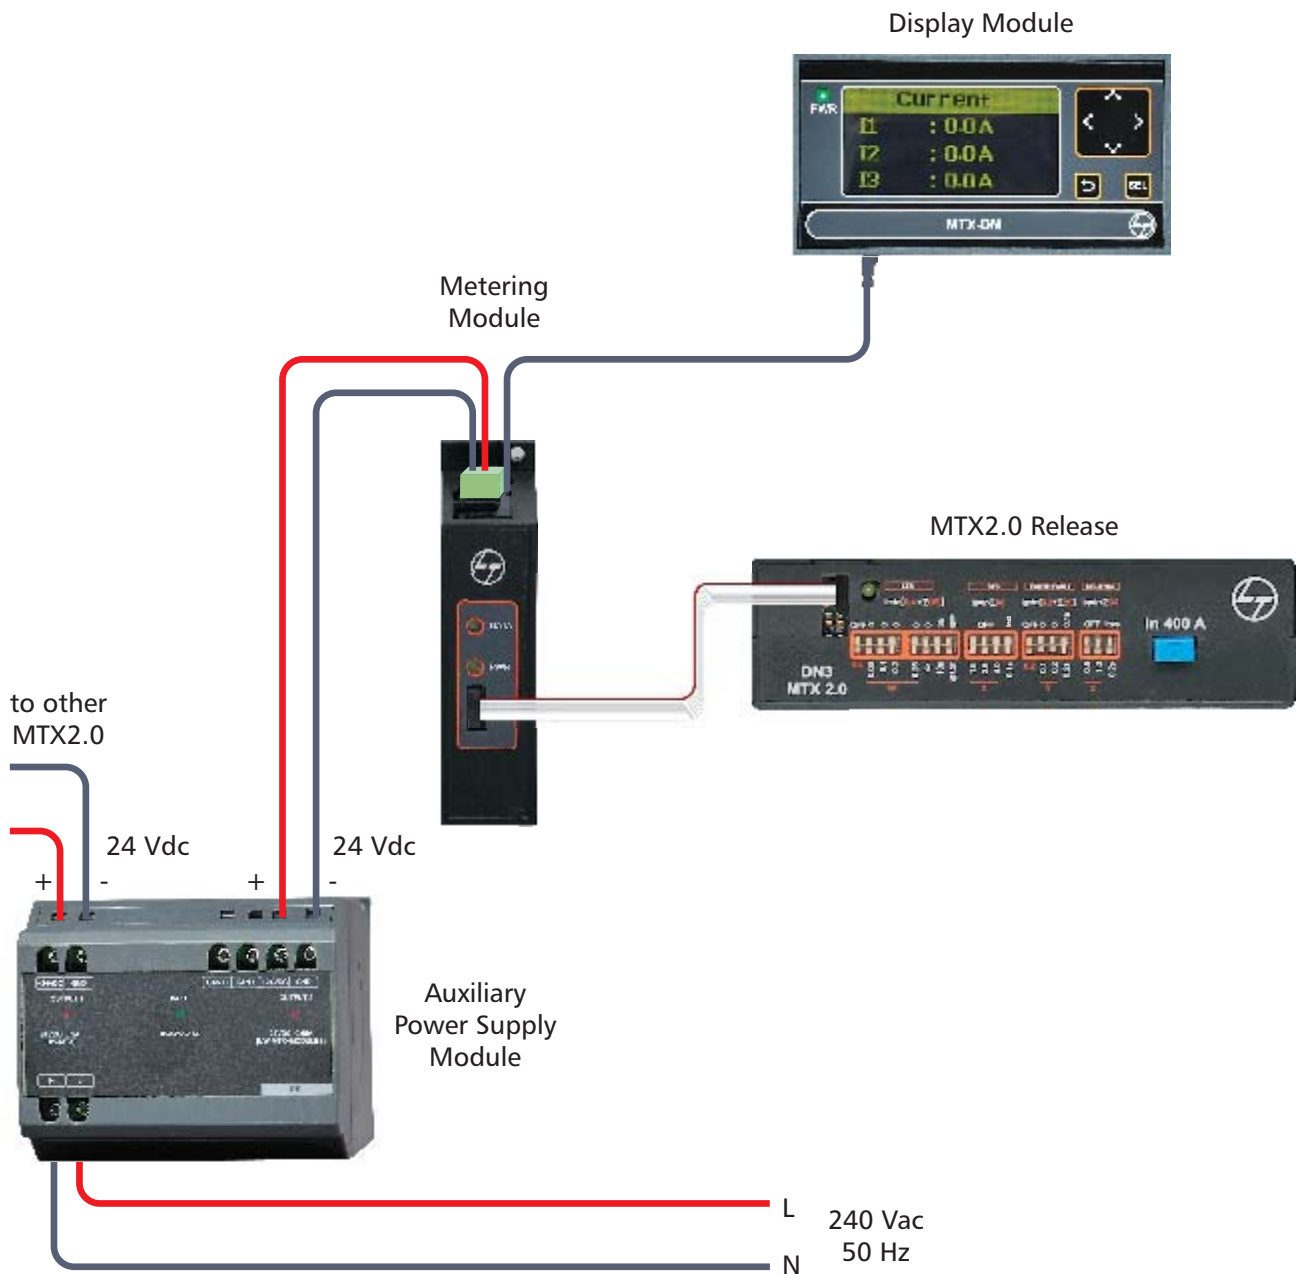

### MTX3.0 with Communication through Modbus

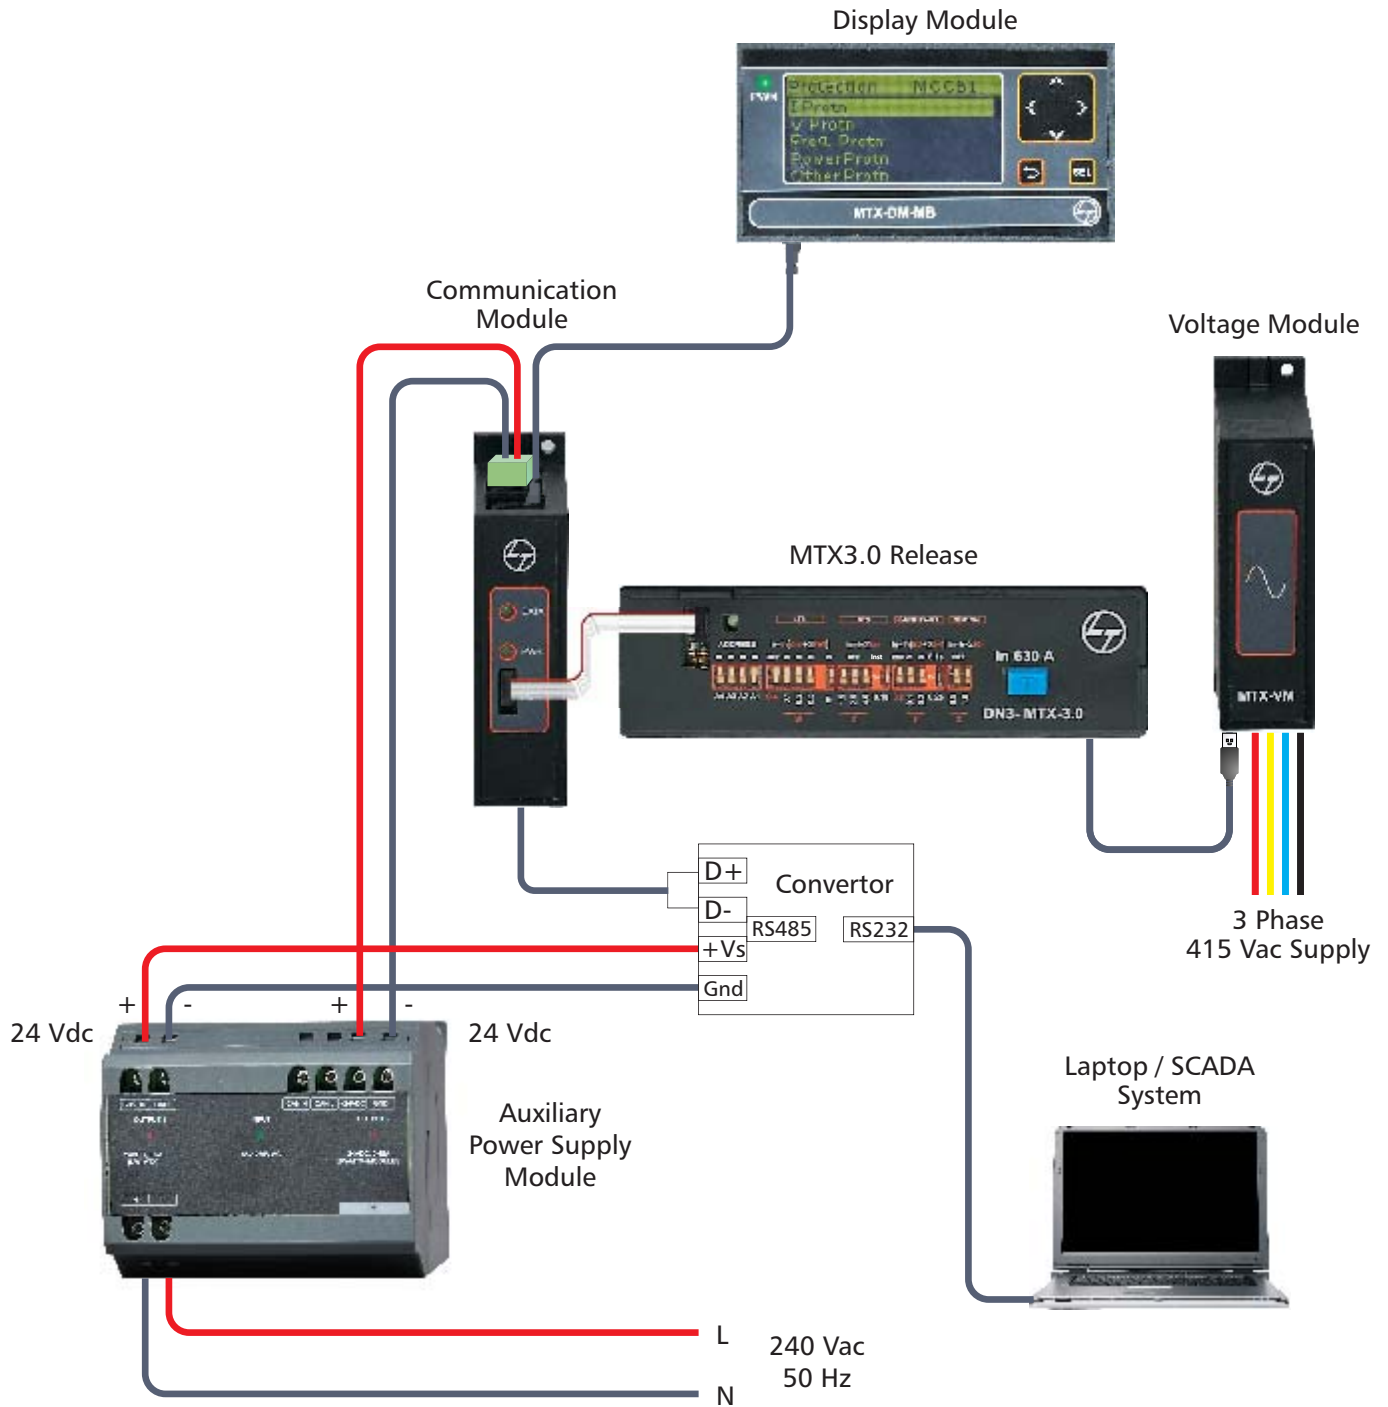







# Dimensions

---

## ■ Dimensions of MCCB

66


- ▶ DN0
- ▶ DN1
- ▶ DN2
- ▶ DN3B
- ▶ DN3
- ▶ DN4

72


## ■ Dimensions of Accessory

- ▶ Rotary Operating Mechanism
- ▶ Stored Energy Electrically Operated Mechanism
- ▶ Panel Mounted Key Lock
- ▶ Mechanical Interlock Kit
- ▶ External Neutral CTs
- ▶ MTX Modules
- ▶ Auto Source Transfer Switch: AuXC-1000 and AuXC-1000L
- ▶ Earth Fault Modules
- ▶ Terminal Shrouds

## DN0-125 MCCB

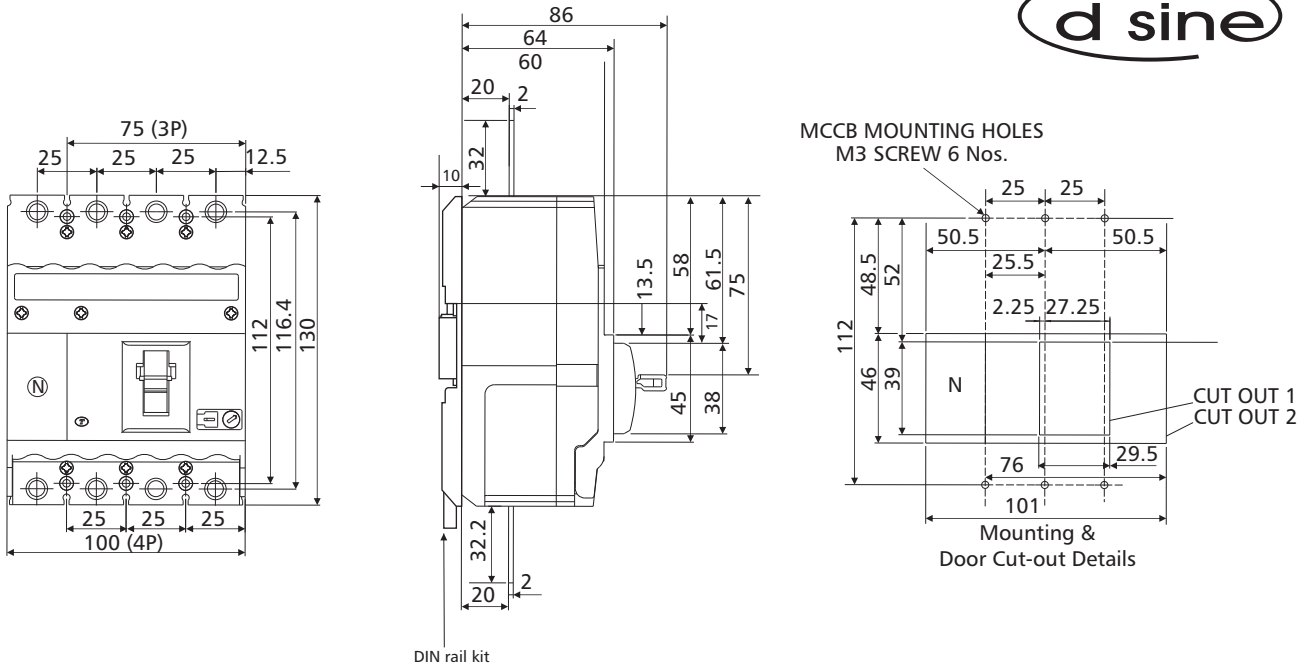

## DN0-125 with Spreader Links

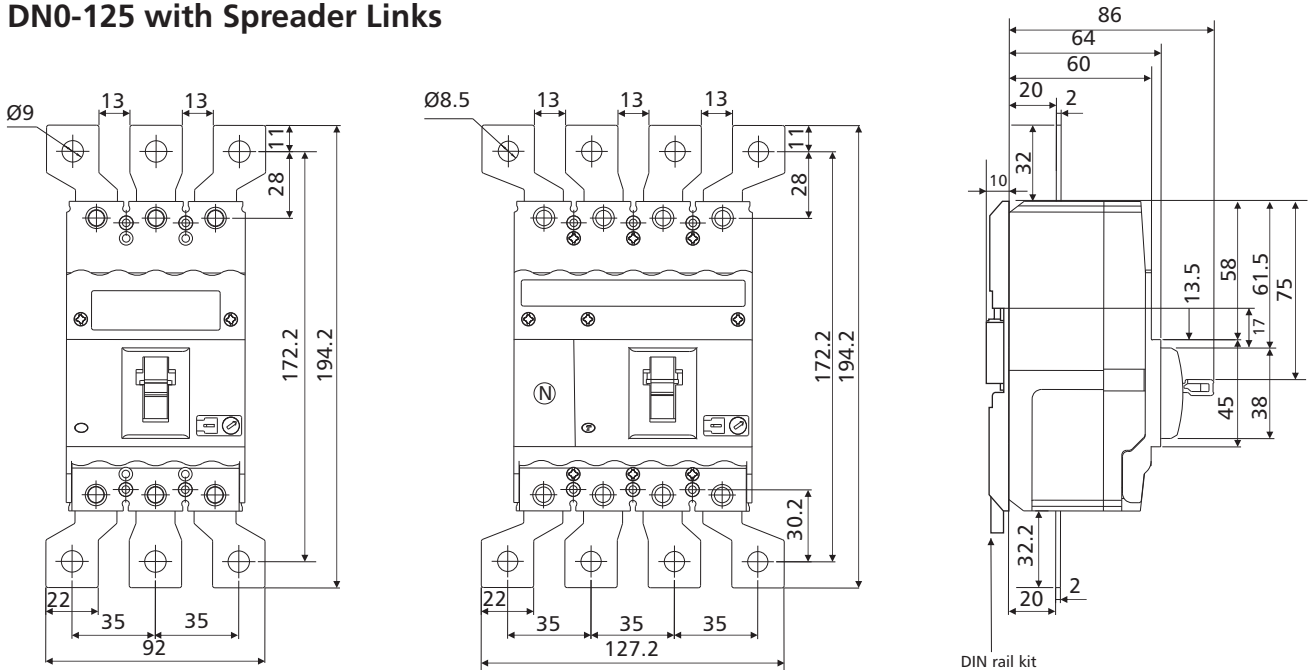



Recommended cat. nos.  
for DN0 spreaders

Current	3P	4P
upto 100A	CM977850000	CM979210000
125A	CM9068700LO	CM9068800LO


- Note:**
- Spreader links are available as spare
  - It is recommended to use spreader links for enhancing termination capacity
  - Frame size is same for DN0 / DN0-SD / DN0-M

All dimensions are in mm

## DN1-250 MCCB

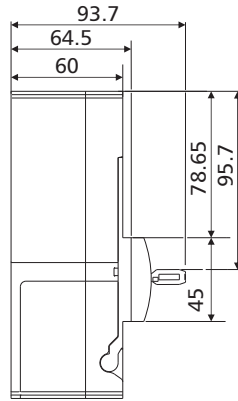
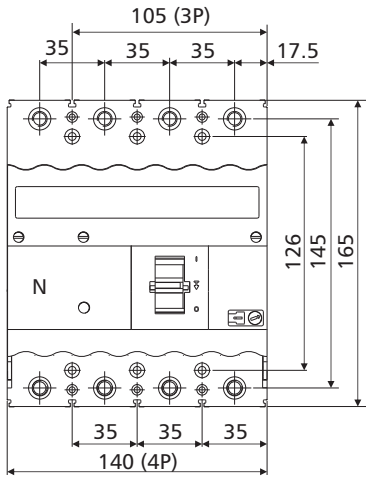


MCCB MOUNTING HOLES 6 Nos.

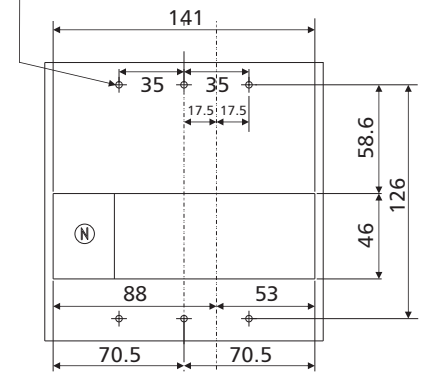

Mounting & Door Cut-out Details

## DN1-250 with Spreader Links

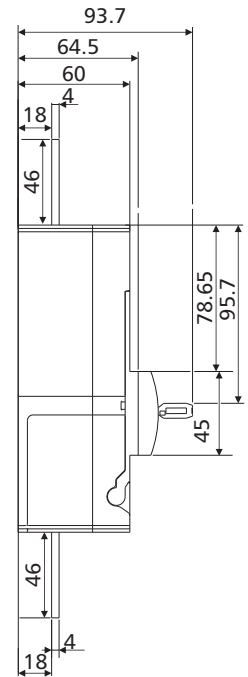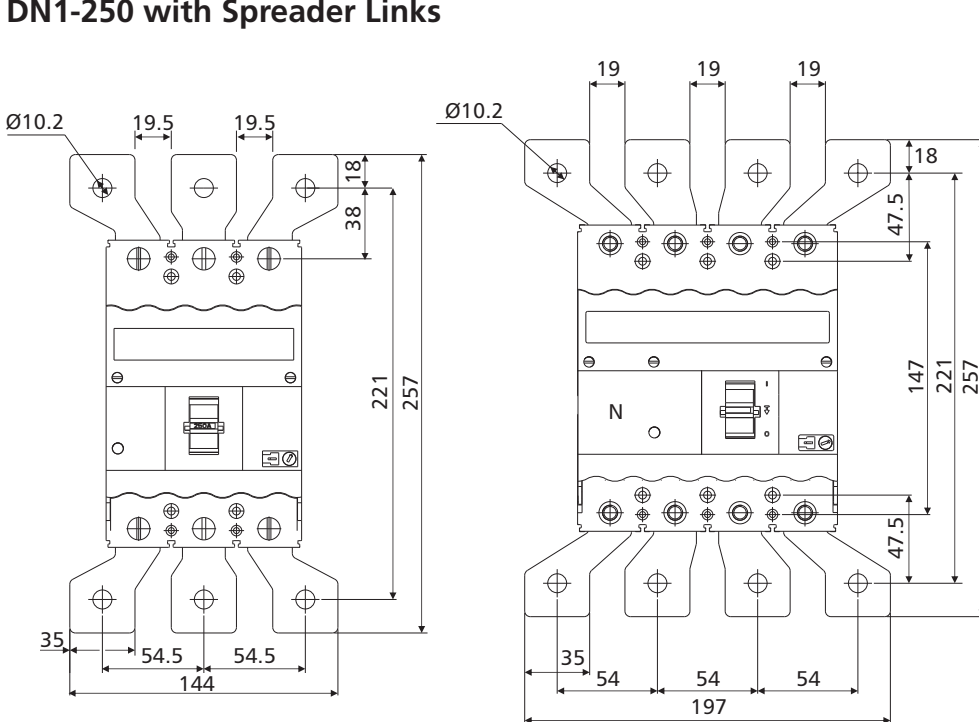




Recommended cat. nos.  
for DN1 spreaders

3P	4P
ST980530000	CM920070000

- Note:**
- Spreaders are available as spare
  - It is recommended to use spreader links for enhancing termination capacity
  - Frame size is same for DN1 / DN1-M




All dimensions are in mm

## DN2-250 MCCB

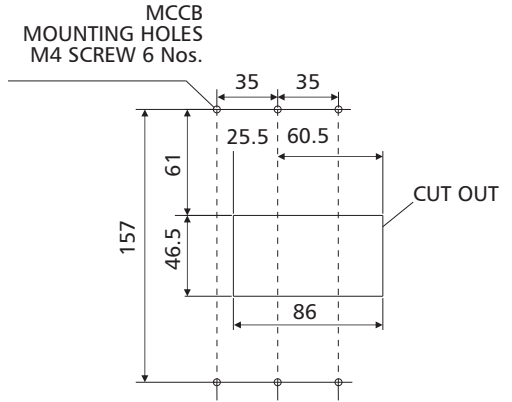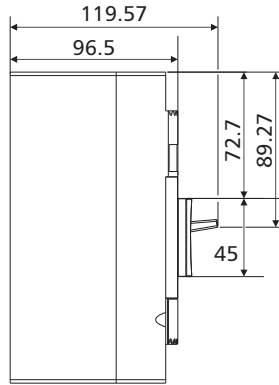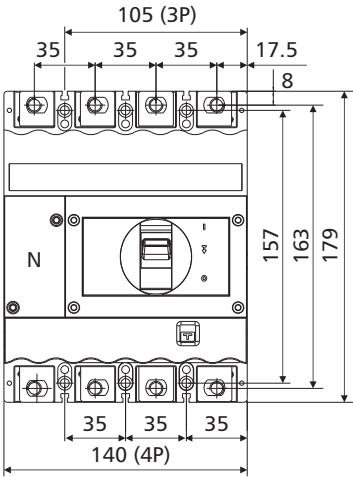

Mounting & Door Cut-out Details

## DN2-250 with Spreader Links

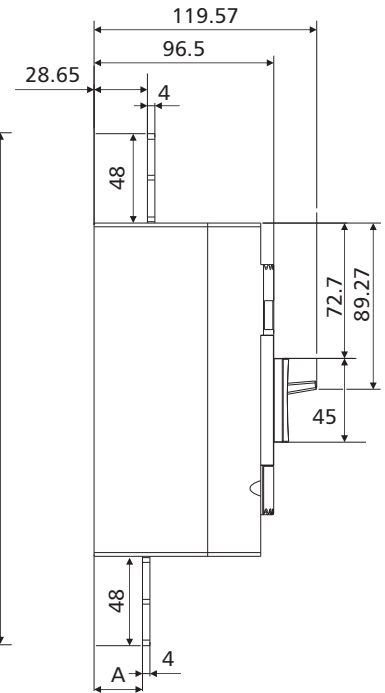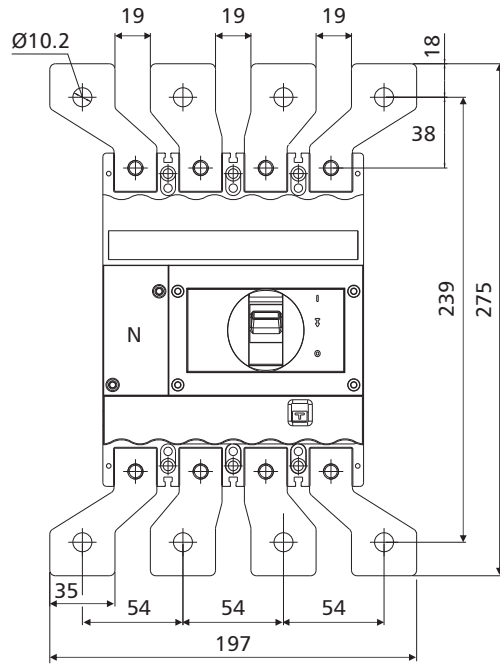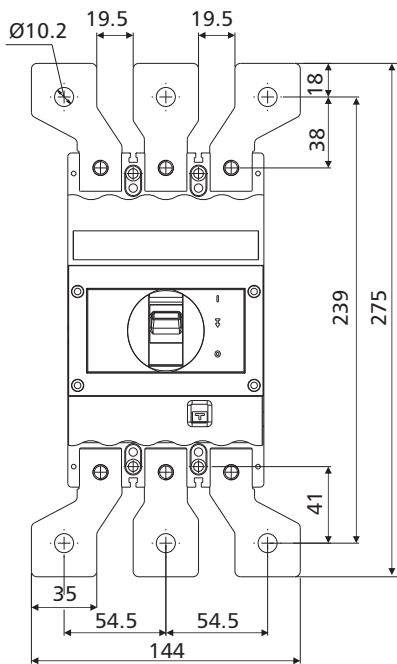

Recommended cat. nos.  
for DN2 spreaders


3P	4P
ST980530000	CM920070000

Rating	Dimension (A)
125-250A TM	26
63-100A TM	25.5
32-50A TM	26.25
MTX breakers	28


- Note:**
- Spreaders are available as spare
  - It is recommended to use spreader links for enhancing termination capacity
  - Frame size is same for DN2 / DN2-SD / DN2-M

All dimensions are in mm

## DN3B-400 MCCB

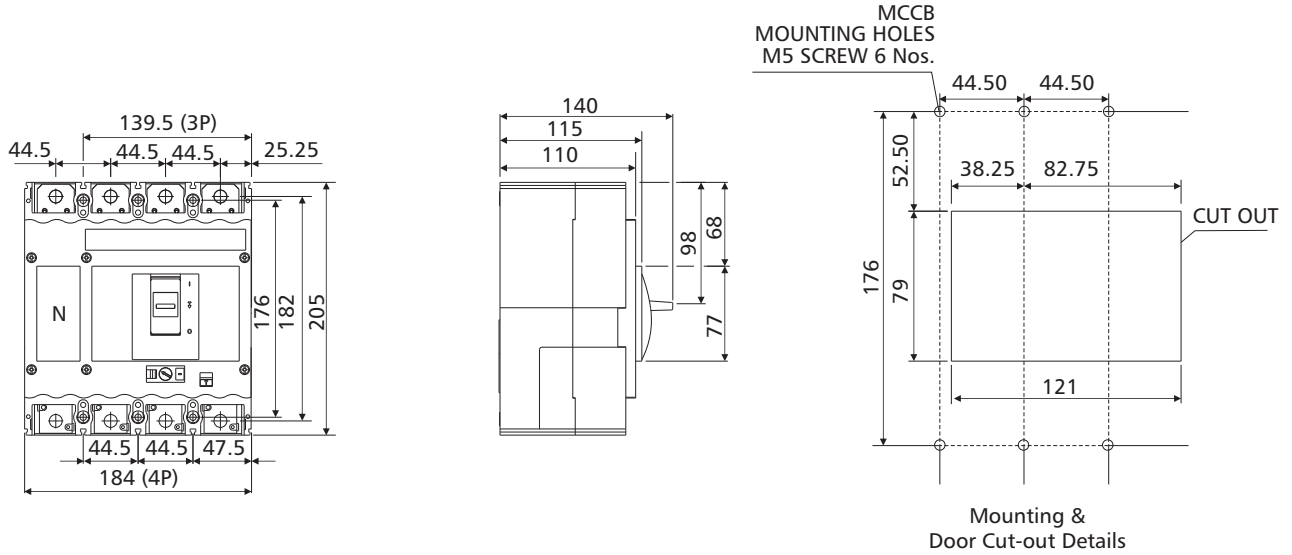

## DN3B-400 with Spreader Links

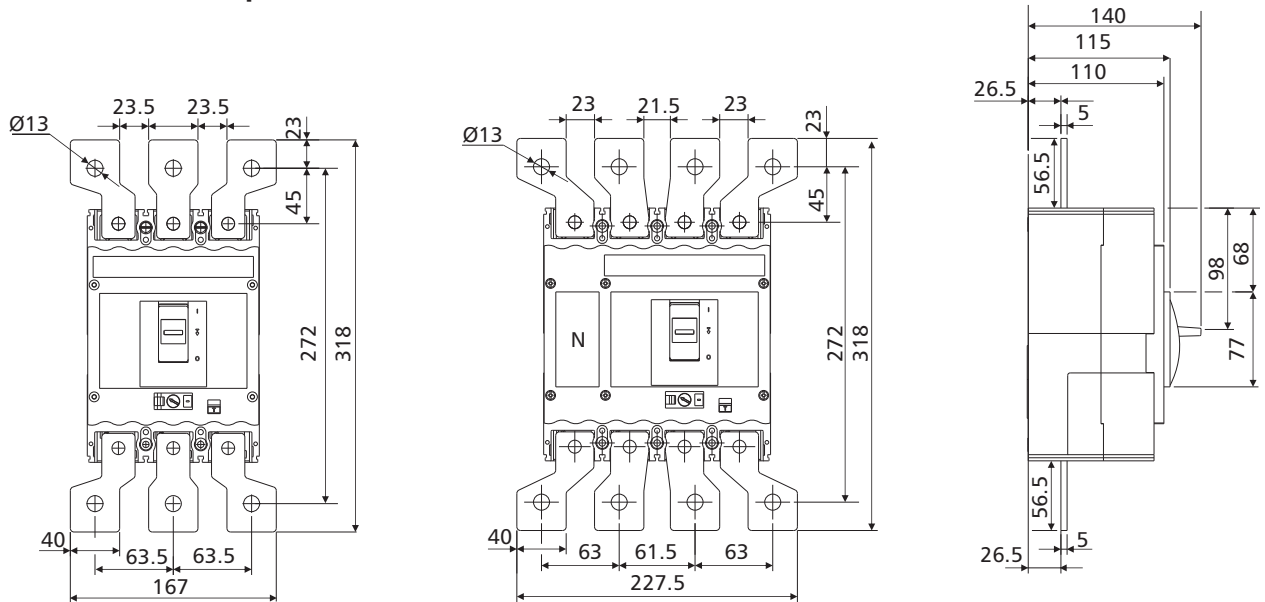



Recommended cat nos.  
for DN3B spreaders

3P	4P
ST980650000	ST980660000


- Note:**
- Spreaders are available as spare
  - It is recommended to use spreader links for enhancing termination capacity
  - Frame size is same for DN3B / DN3B-SD

All dimensions are in mm

## DN3-400/630 MCCB


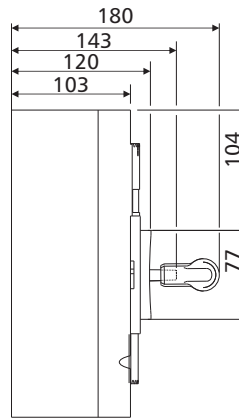
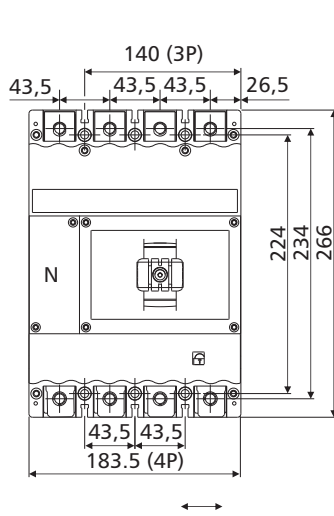


MCCB MOUNTING HOLES  
M5 SCREW 6 Nos.

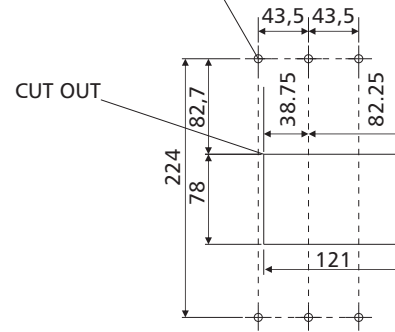

Mounting & Door Cut-out Details

## DN3-400/630 with Spreader Links

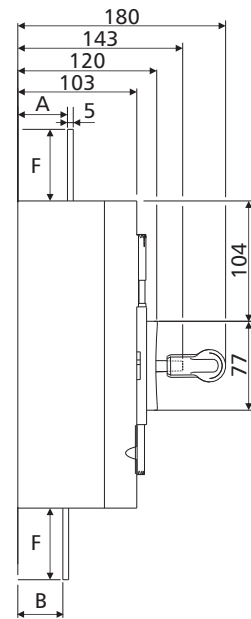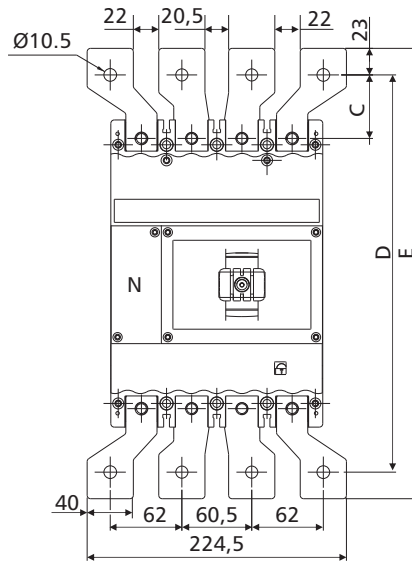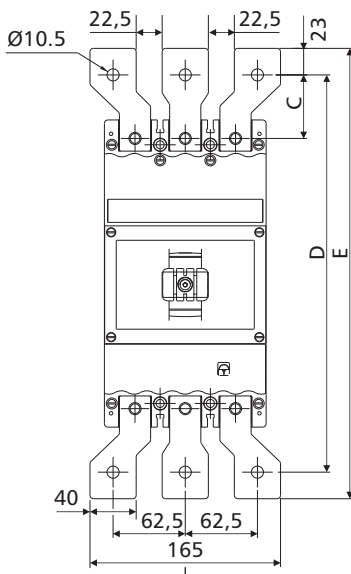

Recommended cat nos.  
for DN3 spreaders

Rating	3P	4P
400A	ST980650000	ST980660000
630A	ST980540000	CM920040000

Type	DN3-400	DN3-630
A	39	43
B	37*	39#
C	45	55
D	324	344
E	370	390
F	52	62



\* 38 for MTX  
# 38 for 500A TM

**Note:**


- Spreaders are available as spare
- It is recommended to use spreader links for enhancing termination capacity
- Frame size is same for DN3 / DN3-SD / DN3-M

All dimensions are in mm

## DN4-800/1000/1250 MCCB

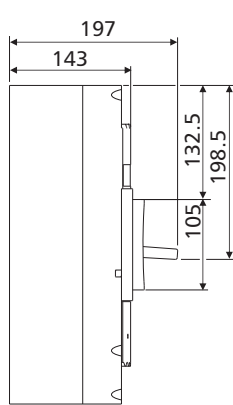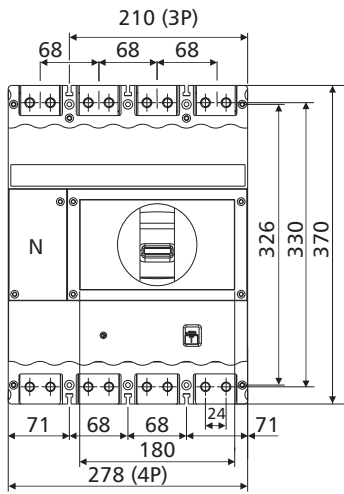


MCCB MOUNTING HOLES M5 SCREW 6 Nos.

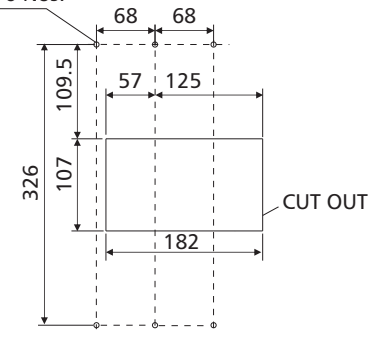


Mounting & Door Cut-out Details


## DN4-800/1000/1250 with Spreader Links

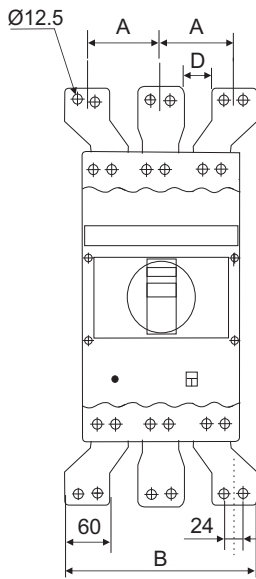

3P Frame

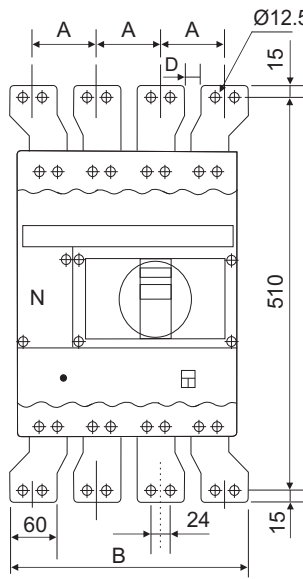

4P Frame

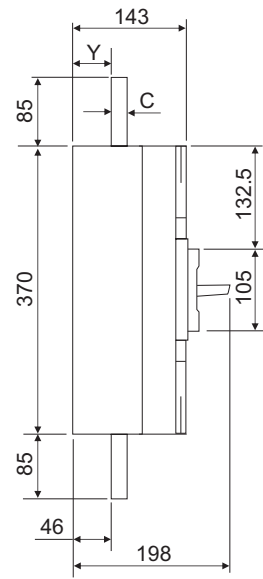

3/4P Frame

Type	A	B	C	D
800A	98	256	6	38
1000A	98	256	12	38
1250A	86	232	20	26

Type	A	B	C	D
800A	88	324	6	28
1000A	88	324	12	28
1250A	80	300	20	20

Type	Y
N version	46
S version	42

### Recommended cat nos. for DN4 spreaders

Rating	3P	4P
800A	CM911610OUO	ST903620OOO
1000A	CM911610OVO	CM900640OVO
1250A	CM911610OAO	ST980580OOO



- Note:**
- Spreader links are available as spare
  - It is recommended to use spreader links for enhancing termination capacity
  - Frame size is same for DN4 / DN4-SD

All dimensions are in mm



Rotary Operating Mechanism (ROM)

Direct ROM Door Cut-out Detail

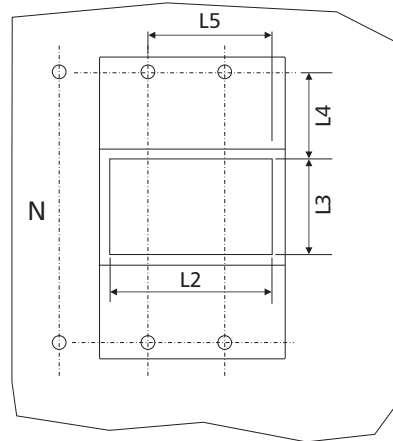
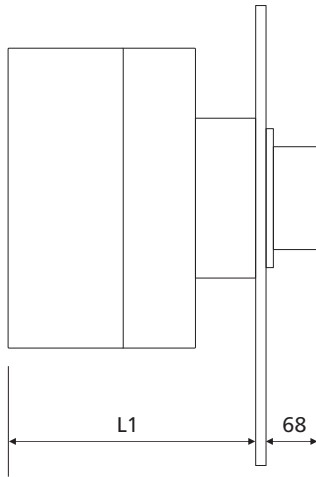


Mounting & Door Cut-out Details

- L1 = Mounting Depth
- L2/L3 = Panel Cut-out
- L4/L5 = Breaker Mounting Refer

Type	L1	L2	L3	L4	L5
DN0	96.5	58	52	43.5	37
DN1	96.5	73	52	56.5	54
DN2	122	96	63	53	66
DN3	146	121	87	78	82
DN3B	146	121	87	49	82.5

Extended ROM Door Cut-out Detail

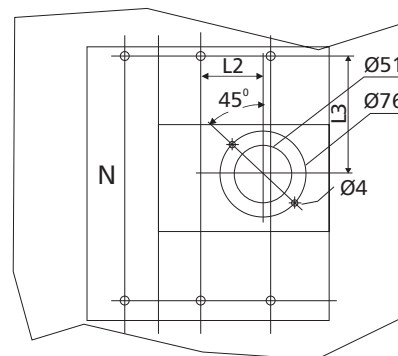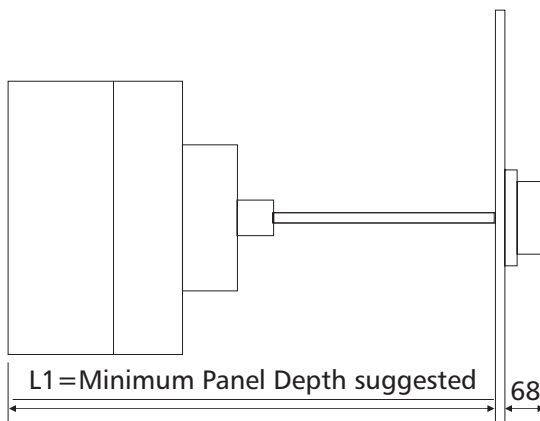

Mounting & Door Cut-out Details



L = Length of Shaft Required for Panel Depth L1

Total Length of Shaft = 275mm


Type	L1	L	L2	L3
DN0	169	L1 - 119	7.5	69.5
DN1	169	L1 - 119	24.5	81.7
DN2	202	L1 - 152	27	84
DN3	233	L1 - 183	39	122
DN3B	233	L1 - 183	39	92
DN4	302	L1 - 252	69	170

All dimensions are in mm


## MCCB with Stored Energy Electrically Operated Mechanism (SE-EOM)




### DN2

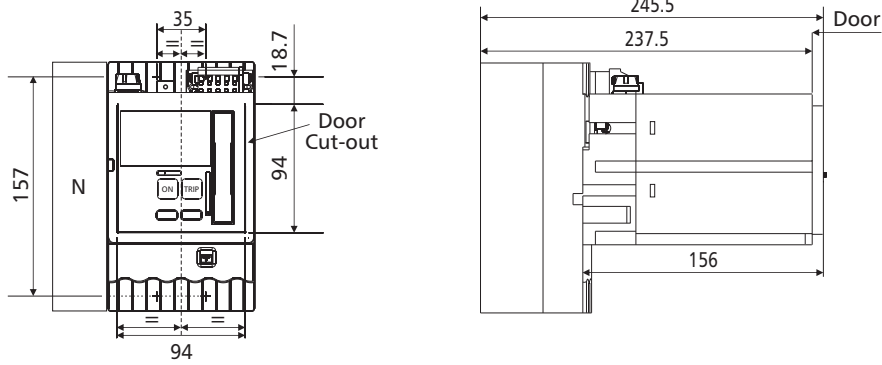

### DN3

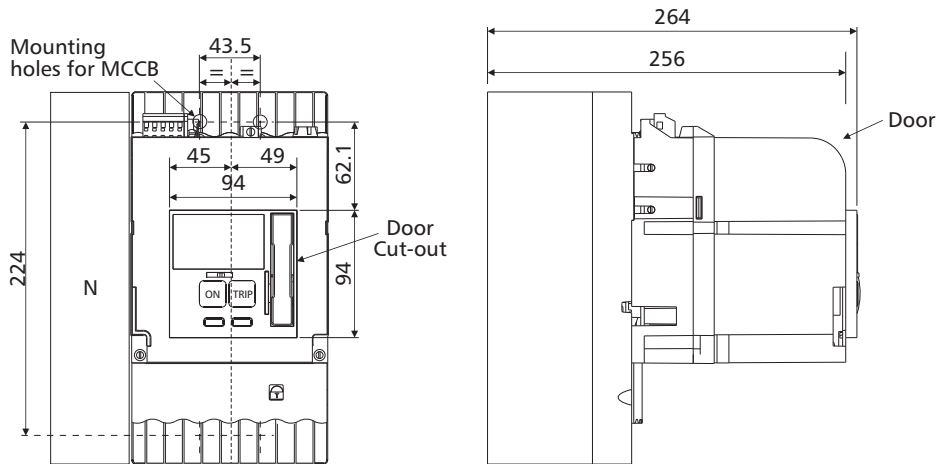

## Panel Mounted Key Lock Type 1 / 2 / 3 / 12 / 23

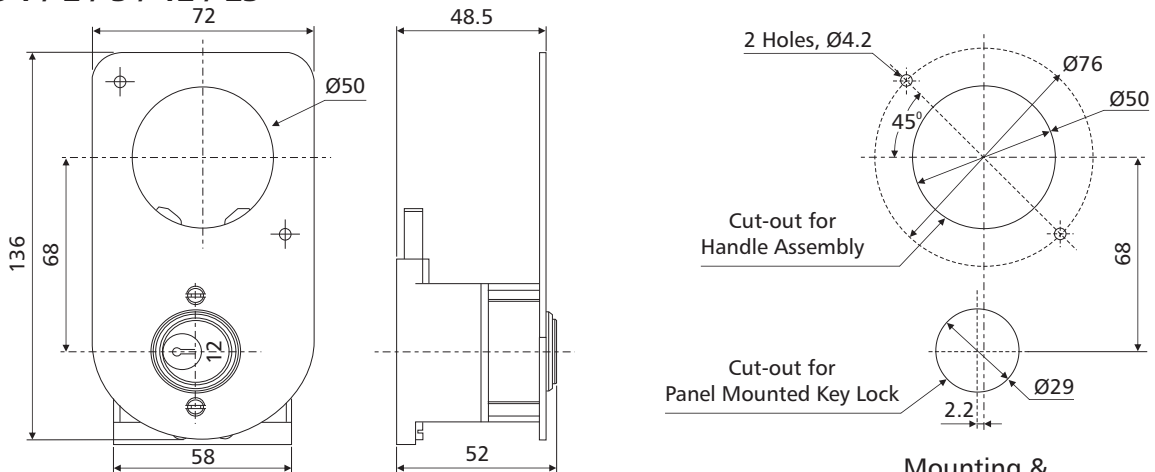

Mounting & Door Cut-out Details


**Note:** Panel Mounted key lock can be used only with extended ROM

All dimensions are in mm


Mechanical Interlocking Kit



DN2

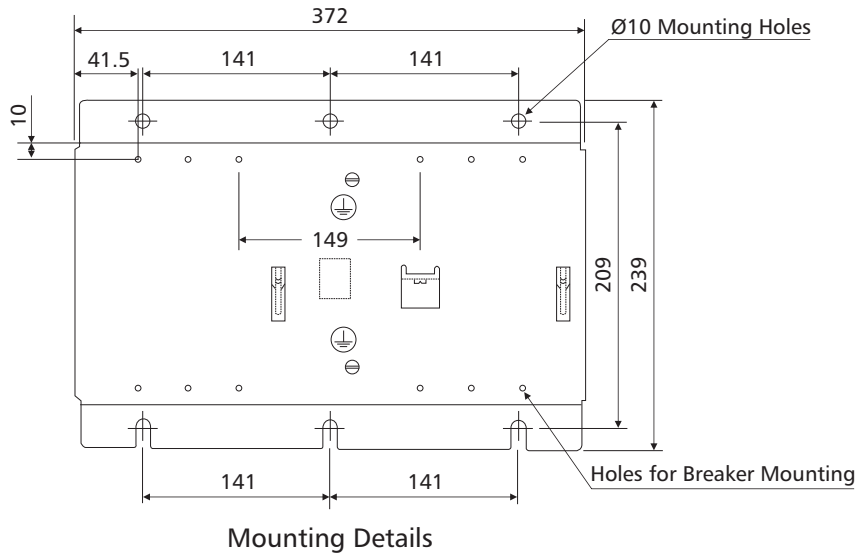


DN3

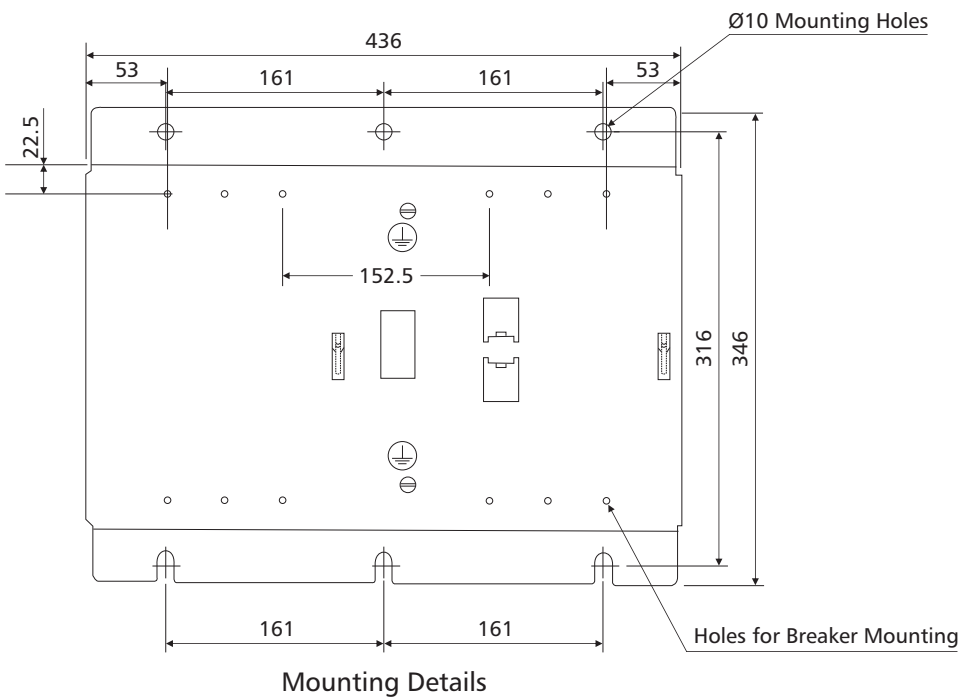

All dimensions are in mm


## External Neutral CTs

DN2/DN3

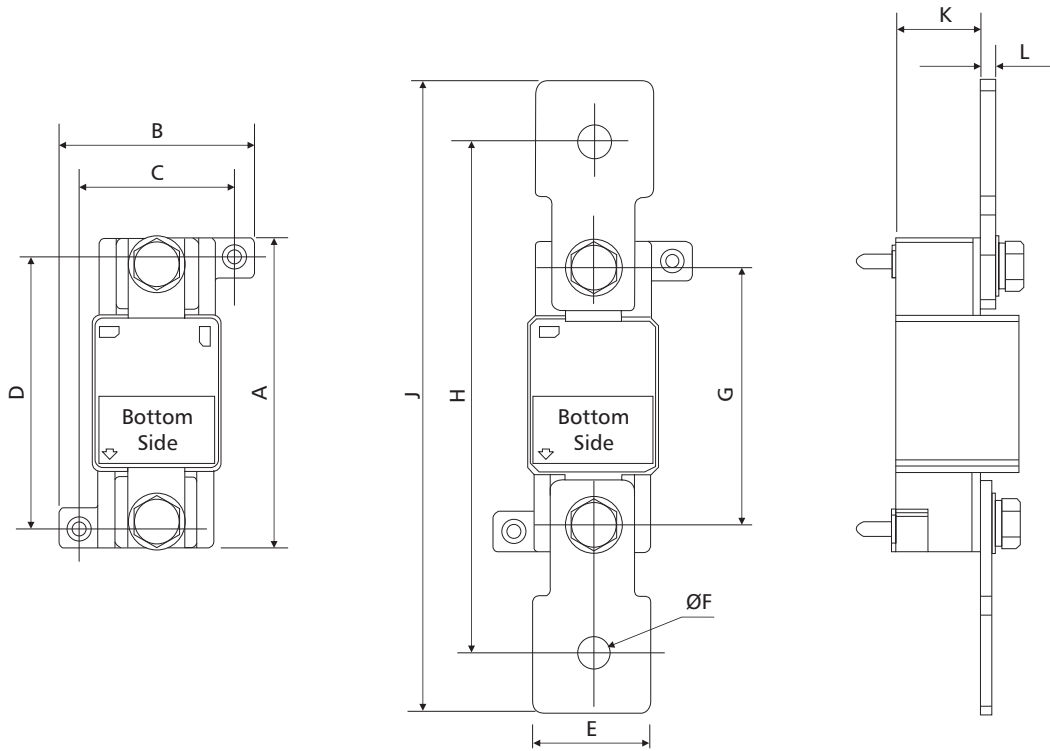

Frame	A	B	C	D	E	F
DN2 250A	93	59	47	81	35	10.2
DN3 400A	93.5	58	46	81.5	40	13
DN3 630A	93.5	58	46	81.5	40	10.5

Frame	G	H	J	K	L	M
DN2 250A	77	153	189	26	4	55
DN3 400A	63.5	153.5	199.5	39	5	60
DN3 630A	63.5	173.5	219.5	39	5	60

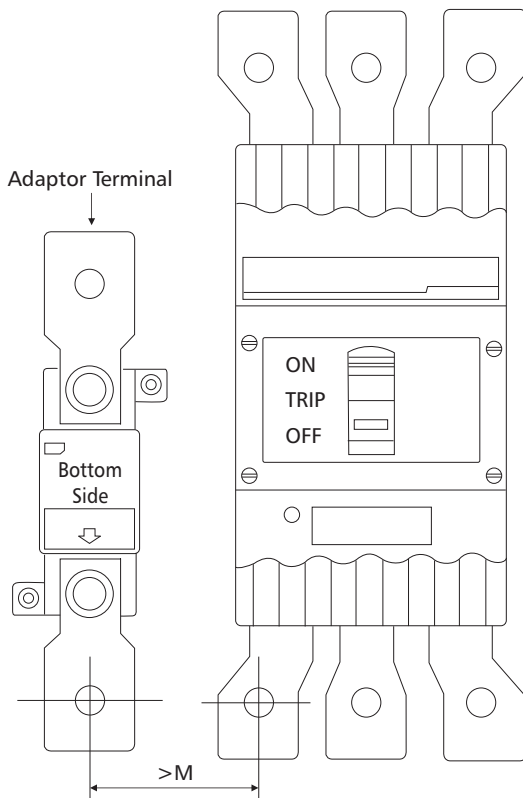


**Note:**

- Adaptor Terminals shown are not available with product
- Kindly refer accessories data for ordering separately
- Circuit Breaker shown for reference only

All dimensions are in mm

External Neutral CTs

DN4

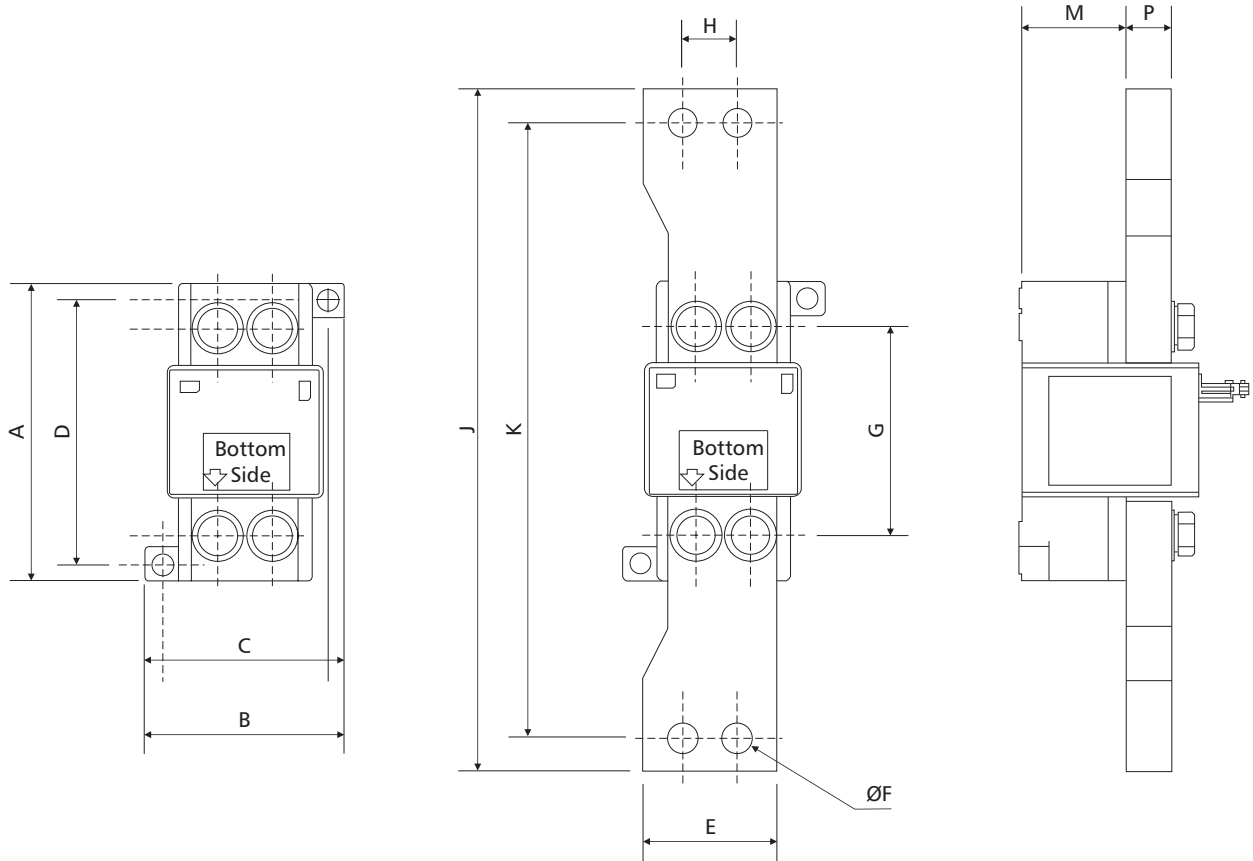

DN4	A	B	C	D	E	F	G
800A	132	88.5	73.5	117	60	12.5	92
1000A	132	88.5	73.5	117	60	12.5	92
1250A	132	88.5	73.5	117	60	12.5	92


DN4	H	J	K	L	M	P
800A	24	302	272	80	47	6
1000A	24	302	272	80	47	12
1250A	24	302	272	80	47	20

**Note:**

- Adaptor Terminals shown are not available with product
- Kindly refer accessories data for ordering separately
- Circuit Breaker shown for reference only

**Special Note:**





- Adaptor Terminals for DN4 range of product are not symmetrical.
- Kindly ensure proper orientation in assembly as shown in figure.

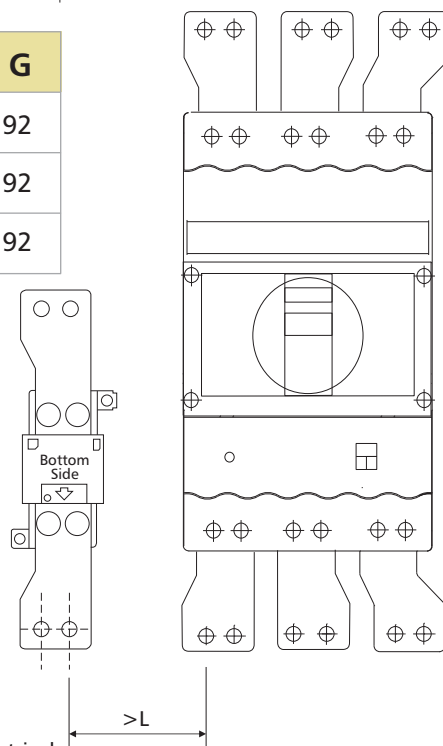

All dimensions are in mm




## MTX Modules

### Display Module

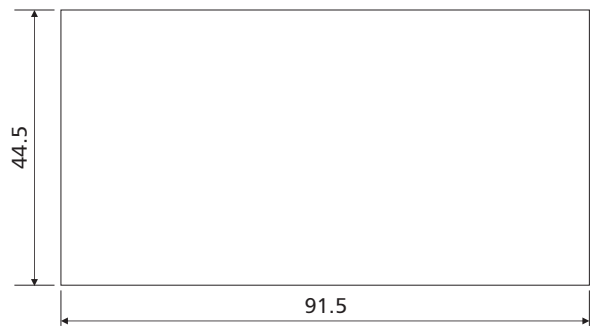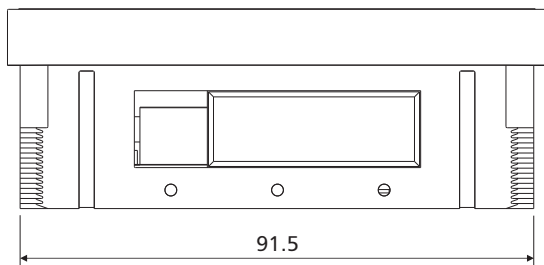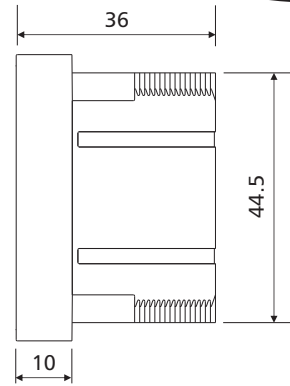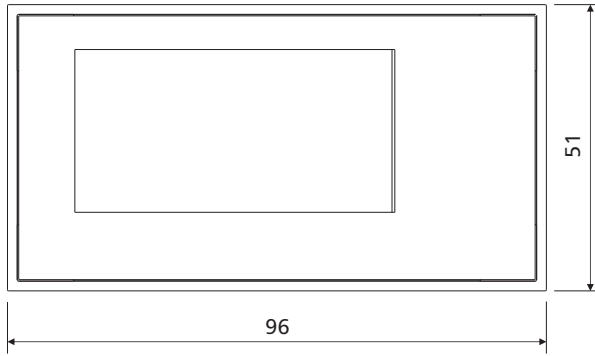

Door Cut-out Details


### Voltage/Communication/Metering Module

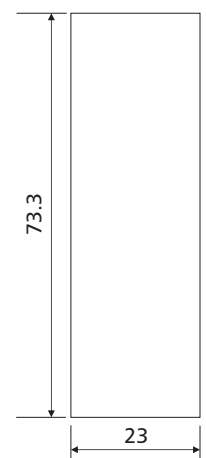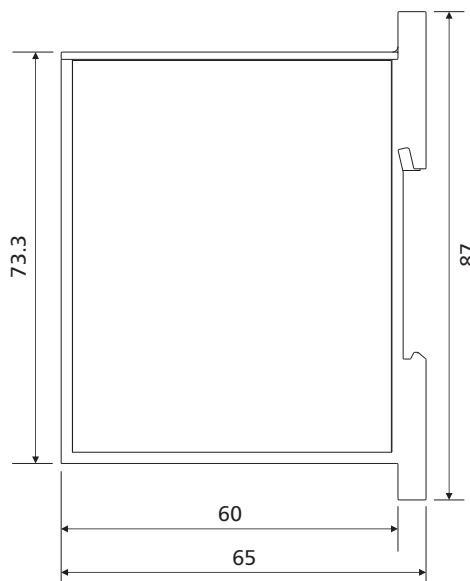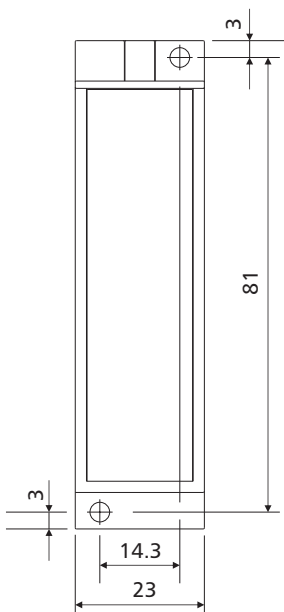

Door Cut-out Details


All dimensions are in mm

**Auto Source Transfer Switch:  
AuXC-1000 and AuXC-1000L**

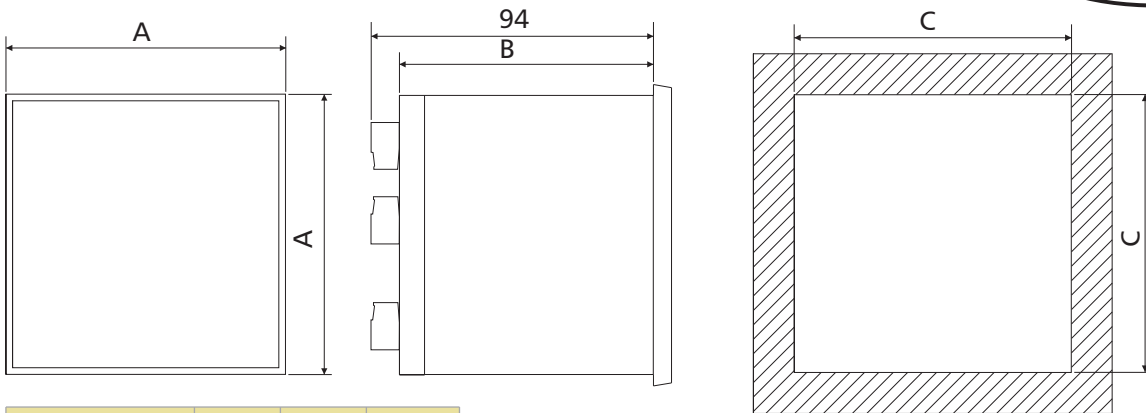


Type	A	B	C
AuXC - 1000	144	79	138.5
AuXC - 1000L	96	82	92


**Earth Fault Modules - GF1, GF2, GF11**

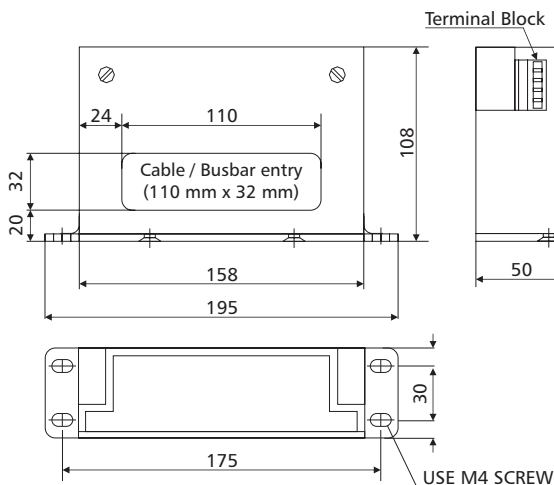


**GF1**

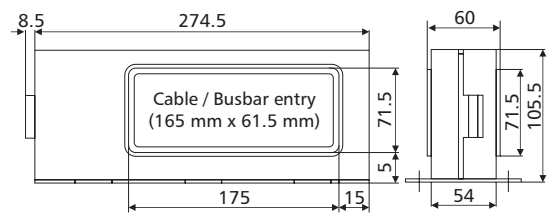

USE M6 SCREW

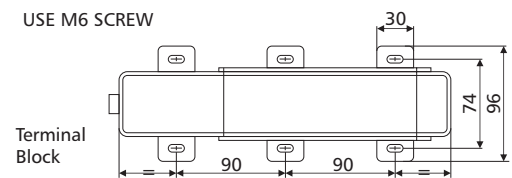

**GF2**

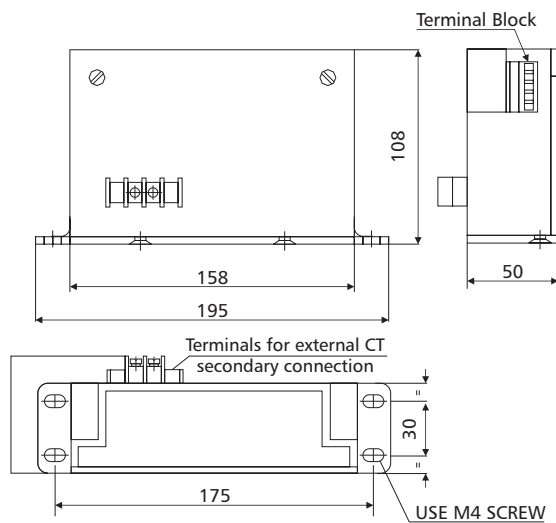

**GF11**

All dimensions are in mm







# Get the Switchgear Training Edge!

Aimed at maximizing productivity, conserving energy, minimizing costs and enhancing safety, our Electrical & Automation training programmes have benefitted over 1.35 Lakh professionals in the last 28 years. These training programmes are highly beneficial as they provide right exposure and impart knowledge on selection, installation, maintenance and testing of Electrical & Automation Products.

## So gain the advantage and go the extra mile with:

- 22 courses on contemporary topics
- Courses applicable to all switchgear brands
- Training Centers in Pune, Lucknow, Coonoor, Vadodara, Delhi & Kolkata
- Blend of theory and practical experience

## The typical training programmes cover:

- Low Voltage & Medium Voltage Switchgear
- Switchboard Electrical Design
- AC Drives & Building Management Solutions
- Protective Relays, Earthing, Reactive Power Management & Harmonics
- Energy Conservation & Management

Please contact any of the training centres for participation and detailed training programme schedule.



### Pune

Larsen & Toubro Limited  
Switchgear Training Centre,  
T-156/157, MIDC  
Bhosari, Pune - 411 026  
Tel: 020 2712 0037 / 2712 0653  
Fax: 020 2712 2933  
E-mail: stc-pune@Lntebg.com



### Lucknow

Larsen & Toubro Limited  
Switchgear Training Centre,  
C - 6 & 7, UPSIDC  
P. O. Sarojinagar, Lucknow - 226 008  
Tel: 0522 247 6015 / 97944 54455  
Fax: 0522 247 6015  
E-mail: stc-lucknow@Lntebg.com



### Coonoor

Larsen & Toubro Limited  
Switchgear Training Centre,  
Ooty-Coonoor Main Road  
Yellanahalli P.O., The Nilgiris - 643 243  
Tel. : 0423 251 7107  
Fax : 0423 251 7158  
E-mail: stc-coonoor@Lntebg.com



### Vadodara

Larsen & Toubro Limited  
Switchgear Training Centre  
Behind L&T Knowledge City,  
Near Village Ankhol,  
Vadodara - 390019  
Tel: 0265 2457805  
E-mail: stc-vadodara@Lntebg.com



### Delhi

Larsen & Toubro Ltd  
Switchgear Training Centre  
32, Shivaji Marg,  
Near Motinagar Metro Station,  
New Delhi - 110015  
Tel: 011 41419515 / 41419695 / 41419500  
Fax: 011 41419600  
E-mail: stc-delhi@Lntebg.com



### Kolkata

Larsen & Toubro Limited  
Switchgear Training Centre  
4th Floor, 3B, Shakespeare Sarani,  
Kolkata - 700071  
Tel: 033 42005975 / 42005978  
E-mail: stc-kolkata@Lntebg.com

## Electrical Standard Products (ESP) Offices:

### HEAD OFFICE

L&T Business Park,  
Tower 'B' / 3rd Floor  
Saki Vihar Road, Powai  
**Mumbai 400 072**  
Tel: 022-67053229  
Fax: 022-67051112  
e-mail: cic@LNTEBG.com

### BRANCH OFFICES

501, Sakar Complex I  
Opp. Gandhigram Rly. Station  
Ashram Road  
**Ahmedabad 380 009**  
Tel: 079-66304006-11  
Fax: 079-66304025  
e-mail: esp-ahm@LNTEBG.com

38, Cubbon Road, P. O. Box 5098  
**Bengaluru 560 001**  
Tel: 080-25020100 / 25020324  
Fax: 080-25580525  
e-mail: esp-blr@LNTEBG.com

131/1, Zone II  
Maharana Pratap Nagar  
**Bhopal 462 011**  
Tel: 0755-3080511 / 05 / 08 / 13 / 17 / 19  
Fax: 0755-3080502  
e-mail: esp-bho@LNTEBG.com

Plot No. 559, Annapurna Complex  
Lewis Road  
**Bhubaneswar 751 014**  
Tel: 0674-6451342 / 2436690 / 2436696  
Fax: 0674-2537309  
e-mail: esp-bsr@LNTEBG.com

Aspire Towers, 4th Floor  
Plot No. 55, Phase-I  
Industrial & Business Park  
**Chandigarh-160 002**  
Tel: 0172-4646840 / 41 / 42 / 46 / 53  
Fax: 0172-4646802  
Email: esp-chd@Lntebg.com

L&T Construction Campus  
TC-1 Building, II Floor  
Mount-Poonamallee Road  
Manapakkam  
**Chennai 600 089**  
Tel: 044-2270 6800  
Fax: 044-22706940  
e-mail: esp-maa1@LNTEBG.com

67, Appuswamy Road  
Post Bag 7156  
Opp. Nirmala College  
**Coimbatore 641 045**  
Tel: 0422-2588120 / 1 / 5  
Fax: 0422-2588148  
e-mail: esp-cbe@LNTEBG.com

Khairasol, Degaul Avenue  
**Durgapur 713 212**  
Tel: 0343-2540448 / 2540449 / 2540443  
Fax: 0343-2540442  
e-mail: esp-dgp@LNTEBG.com

5, Milanpur Road, Bamuni Maidan  
**Guwahati 781 021**  
Tel: +91 8876554410 / 8876554417  
Fax: 361-2551308  
e-mail: esp-ghy@LNTEBG.com

II Floor, Vasantha Chambers  
5-10-173, Fateh Maidan Road  
**Hyderabad 500 004**  
Tel: 040-67015052  
Fax: 040-23296468  
e-mail: esp-hyd@LNTEBG.com

Monarch Building, 1st Floor  
D-236 & 237, Amrapali Marg  
Vaishali Nagar  
**Jaipur 302 021**  
Tel: 0141-4385914 to 18  
Fax: 0141-4385925  
e-mail: esp-jai@LNTEBG.com

Akashdeep Plaza, 2nd Floor  
P. O. Golmuri  
**Jamshedpur 831 003**  
Jharkhand  
Tel: 0657-2312205 / 38  
Fax: 0657-2341250  
e-mail: esp-jam@LNTEBG.com

Skybright Bldg; M. G. Road  
Ravipuram Junction, Ernakulam  
**Kochi 682 016**  
Tel: 0484-4409420 / 4 / 5 / 7  
Fax: 0484-4409426  
e-mail: esp-cok@LNTEBG.com

3-B, Shakespeare Sarani  
**Kolkata 700 071**  
Tel: 033-42005982  
Fax: 033-22821025 / 7587  
e-mail: esp-ccu@LNTEBG.com

A28, Indira Nagar, Faizabad Road  
**Lucknow 226 016**  
Tel: 0522-4929905 / 04  
Fax: 0522-2311671  
e-mail: esp-Lko@LNTEBG.com

No: 73, Karpaga Nagar, 8th Street  
K. Pudur  
**Madurai 625 007**  
Tel: 0452-2567405 / 2561068 / 2561657  
Fax: 0452-2567552  
e-mail: esp-mdu@LNTEBG.com

L&T Business Park,  
Tower 'B' / 5th Floor  
Saki Vihar Road, Powai  
**Mumbai 400 072**  
Tel: 022-67052874 / 2737 / 1156  
Fax: 022-67051112  
e-mail: esp-bom@LNTEBG.com

12, Shivaji Nagar  
North Ambajhari Road  
**Nagpur 440 010**  
Tel: 0712-2260012 / 6606421  
Fax: 2260030 / 6606434  
e-mail: esp-nag@LNTEBG.com

32, Shivaji Marg  
P. O. Box 6223  
**New Delhi 110 015**  
Tel: 011-41419514 / 5 / 6  
Fax: 011-41419600  
e-mail: esp-del@LNTEBG.com

L&T House  
P. O. Box 119  
191/1, Dhole Patil Road  
**Pune 411 001**  
Tel: 020-66033395 / 66033279  
Fax: 020-26164048 / 26164910  
e-mail: esp-pnq@LNTEBG.com

Crystal Tower,  
4th Floor, G. E. Road  
Telibandha  
**Raipur - 492 006**  
Tel: 0771-4283214  
e-mail: esp-raipur@LNTEBG.com

3rd Floor  
Vishwakarma Chambers  
Majura Gate, Ring Road  
**Surat 395 002**  
Tel: 0261-2473726  
Fax: 0261-2477078  
e-mail: esp-sur@LNTEBG.com

Radhadaya Complex  
Old Padra Road  
Near Charotar Society  
**Vadodara 390 007**  
Tel: 0265-6613610 / 1 / 2  
Fax: 0265-2336184  
e-mail: esp-bar@LNTEBG.com

Door No. 49-38-14/3/2, 1st floor,  
NGGO's Colony, Akkayyapalem,  
**Visakhapatnam - 530 016**  
Tel: 0891-2791126 / 2711125  
Fax: 0891-2791100  
Email: esp-viz@LNTEBG.com

Product improvement is a continuous process. For the latest information and special applications, please contact any of our offices listed here.



**Larsen & Toubro Limited, Electrical Standard Products**

Powai Campus, Mumbai 400 072

**Customer Interaction Center (CIC)**

BSNL / MTNL (toll free) : 1800 233 5858 Reliance (toll free) : 1800 200 5858

Tel : 022 6774 5858, Fax : 022 6774 5859

E-mail : cic@Lntebg.com / Website www.Lntebg.com

**Registered Office:** L&T House, N. M. Marg, Ballard Estate, Mumbai 400 001, INDIA **CIN:** L99999MH1946PLC004768

SP 50584 R7